



ENGINEERING CHANGE ORDER

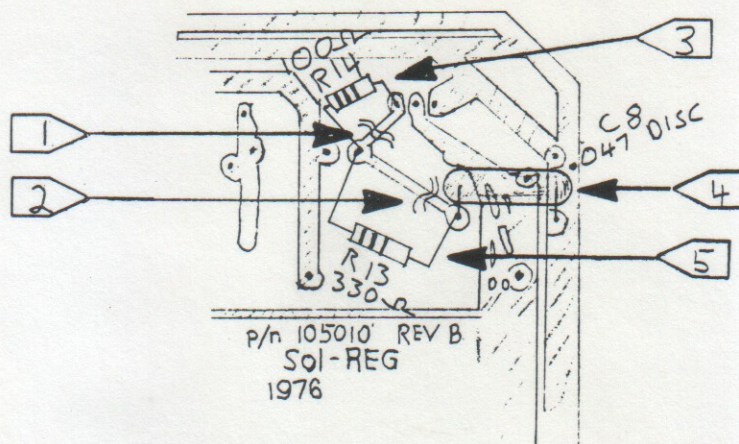

BOTTOM VIEW (Solder Side)

NOTES. UNLESS OTHERWISE SPECIFIED:

- 1) CUT TRACE CONNECTING Anode of D1 with gate of SCR1.
- 2) CUT TRACE CONNECTING R2 WITH D1.
- 3) Solder R14 (new) TO pads of D1 ANODE + SCR1 GATE.
- 4) SOLDER C8 (new) TO pads of R2 (both ENDS).
- 5) Solder R13 (new) TO pads of D1 (ANODE) + R2.

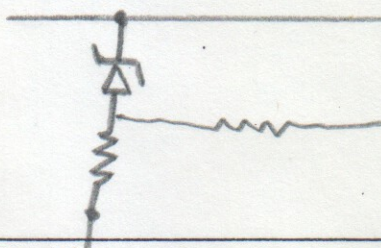

R14	NEW	100Ω 5% 1/4W	Film Resistor	1					
R13	NEW	330Ω 5% 1/4W	Film Resistor	1					
C8	NEW	.047UF	DISC CAPACITOR	1					
REF. DES.	PART OR DWG. NO.	PART DESCRIPTION							

NEXT ASSY.	USED ON	 Processor Technology Corporation 6200 Hollis Street Emeryville, CA 94608	DRAWN: A. ATARIAN II	ENGR: R. Mann
ECO 10018	105009		DATE: 2/9/77	DATE: 2-10-77
			CHECKED: K. Jorgensen	RELEASED: R. Mann
			DATE: 2/9/77	DATE: 2-10-77
		MODIFICATION, PC BOARD, Sol Reg, CROW BAR		
		REF. DRAWING NO. 100510		
B	E.C.O. 10017	SCALE: —		
REV.	DRAWING NO.	SHEET 1 OF 1		SIZE