

1

Illustrated Parts Breakdown (IPB)

Introduction


Following is an illustrated parts breakdown for the Prioris ZX 6000MP Series server. Parts tables and support illustrations include: server front view, server left-side view, and server right-side/rear view.

Illustrated Parts Breakdown (IPB)

Server Front View

Figure Legend	FRU	Description
1	70-31674-04 70-31901-04	Enclosure assembly Enclosure subassembly (without power supplies)
2	70-31898-02	Front bezel assembly
3	74-49277-01	Push button (3)
4	54-23594-01	OCP module
5	30-43447-01	LCD,DV16100 S2FTLY
6	70-31897-01 70-31897-02	Caster left (front and back) Caster right (front and back)
7	12-39309-04	Speaker assembly, 270 mm
8	74-49365-01	Drive holder (CD-ROM, right side)
9	12-43231-03	Front keylock assembly
10	70-30796-03	Cover assembly, 5.25-inch drive
11A	74-48642-01	SBB rail, right
11B	74-48642-02	SBB rail, left
12	70-31906-01	Door assembly
13	70-31675-01	Side panels (left and right)
14	30-45370-01	5.25-inch, half-height quad speed CD-ROM
15	00-PCXVR-AE	3.5-inch, floppy disk drive, 1.44 MB
16	RZ28C-VW RZ29C-VW	2 GB 3.5-inch SCSI BB 4 GB 3.5-inch SCSI BB
17	74-49586-01	Brake
18	70-31927-01	Door assy, driver

Illustrated Parts Breakdown (IPB)

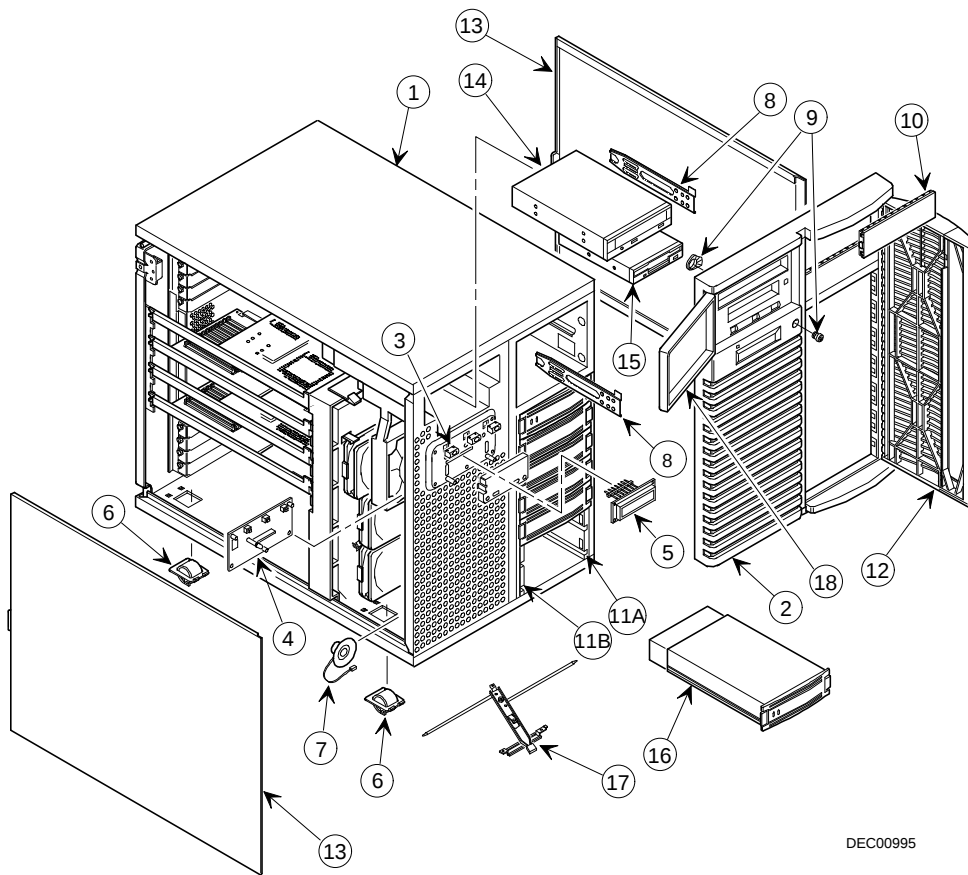

DEC00995


Server Front View

Illustrated Parts Breakdown (IPB)

Server Left-Side View

Figure Legend	FRU	Description
1A	12-41569-02	Primary fan
1B	12-41569-06	Secondary fan
2	17-04096-01	Flat 10-pin cable assembly (OCP power/data cable)
3	21-39151-01	Real-time clock (server battery)
4	54-24480-01	Main logic board
5	54-24060-01	CPU terminator
6	70-32543-01	Single P6 166 512 cache CPU module
	70-32543-02	Dual P6 166 512 cache CPU module
	70-32543-03	Single P6 200 512 cache CPU module
	70-32543-04	Dual P6 200 512 cache CPU module
7	70-32520-01	Retainer assembly (for CPU and memory modules)
8	54-24046-01	Memory module (2)
9	20-44037-17	60 ns SIMM, 8 MB
	54-23170-BA	60 ns SIMM, 16 MB
	54-21277-BA	60 ns SIMM, 32 MB
	54-24123-AA	60 ns SIMM, 64 MB
10	17-03460-08	Flat 34-pin cable assembly (for diskette drive)
11	17-04144-01	68-pin SCSI cable assembly (five connectors)
12	17-04143-01	68-pin SCSI cable assembly (two connectors unshielded)
13	54-24052-01	CPU module VRMs
14	30-42838-02	Adaptec 2940W PCI SCSI adapter
15A	12-44211-01	Primary fan
15B	12-44211-01	Secondary fan

Illustrated Parts Breakdown (IPB)

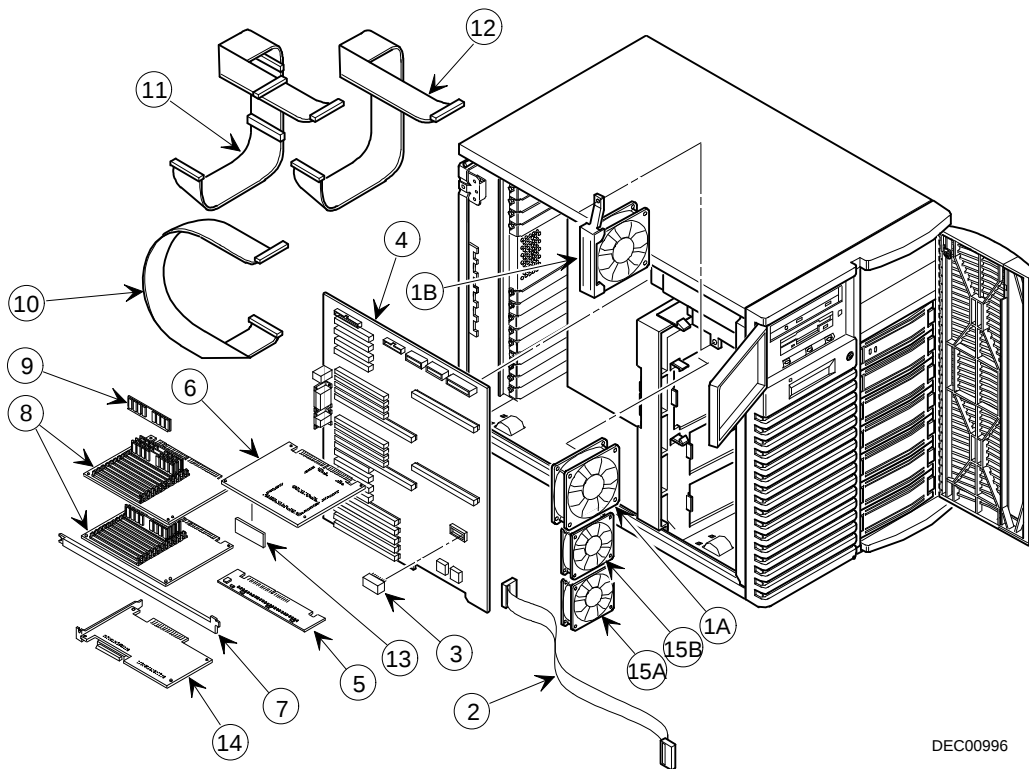

DEC00996


Server Left-Side View

Illustrated Parts Breakdown (IPB)

Server Right-Side/Rear View

Figure Legend	FRU	Description
1	70-31919-01	Door lock assembly
2	12-37977-04	Rear keylock assembly
3	70-31909-01	Micro switch cable assembly
4	74-48300-01	I/O expansion board cover bracket
5	30-43120-01	Power supply (2)
6	70-31890-01	Wire assembly (three wires)
7	70-31894-01	Wire assembly (12 wires)
8	70-31928-01	System power wire assembly
9	17-04143-02	68-pin SCSI cable assembly (jumper cable)
10	12-41768-02	SCSI terminator 68-position single-ended
11	54-23384-01	Hot-swap backplane module

Illustrated Parts Breakdown (IPB)

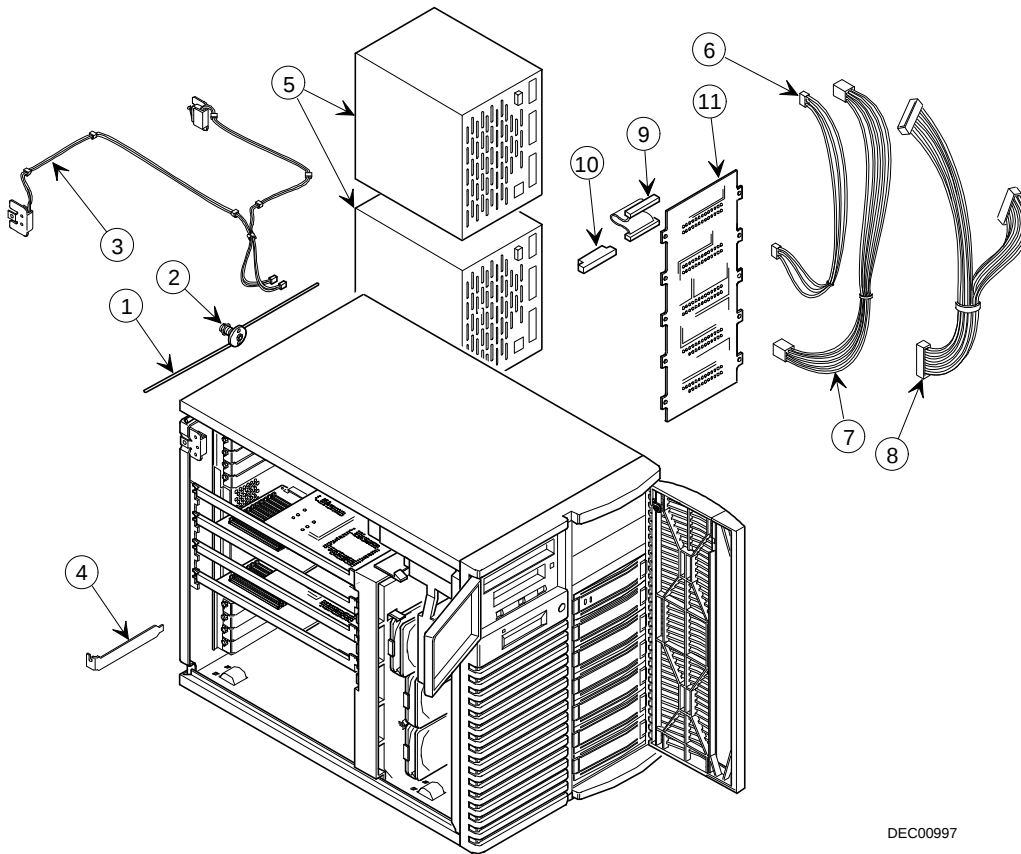

DEC00997

Server Right-Side/Rear View

Illustrated Parts Breakdown (IPB)

Miscellaneous

FRU	Description
17-04009-01	SCSI adapter cable assembly (68- to 50-pin)
17-04009-02	SCSI adapter cable assembly (68- to 50-pin)
30-42551-01	Adaptec 2740 fast SCSI-2 PCI controller 2-channel
30-42752-01	3 COMM ethernet III EISA BNC NIC
30-42753-01	3 COMM ethernet III EISA TP NIC
30-42584-01	Proteon EISA token ring NIC
30-41854-01	14.4 bps data/fax modem
30-42291-01	28.8 data/14.4 fax modem
PC7XS-AA	PS/2 2-button mouse
30-43529-02	Adapter, host, PCI SCSI wide 2-channel
30-46890-02	Controller, 2-channel, RAID with battery (FR-PCTAR-BD)
30-47636-01	Battery backup (FR-PCTAR-UB)

Labels and Nameplates

FRU	Description
74-49386-35	Nameplate, Prioris ZX 6000MP Series
36-44556-01	Warning label, power switch
36-45369-03	Label, user info guide (right)
36-47812-01	Label, user info guide (left)