


7. Exploded Views and Parts List (ML-2010P/SEE)


Contents

7.1	Main Assembly	
7.2	Frame Assembly	
7.3	Fuser Unit	
7.4	Paper Path Assembly	
7.5	MP Tray Assembly	


7.1 Main Assembly

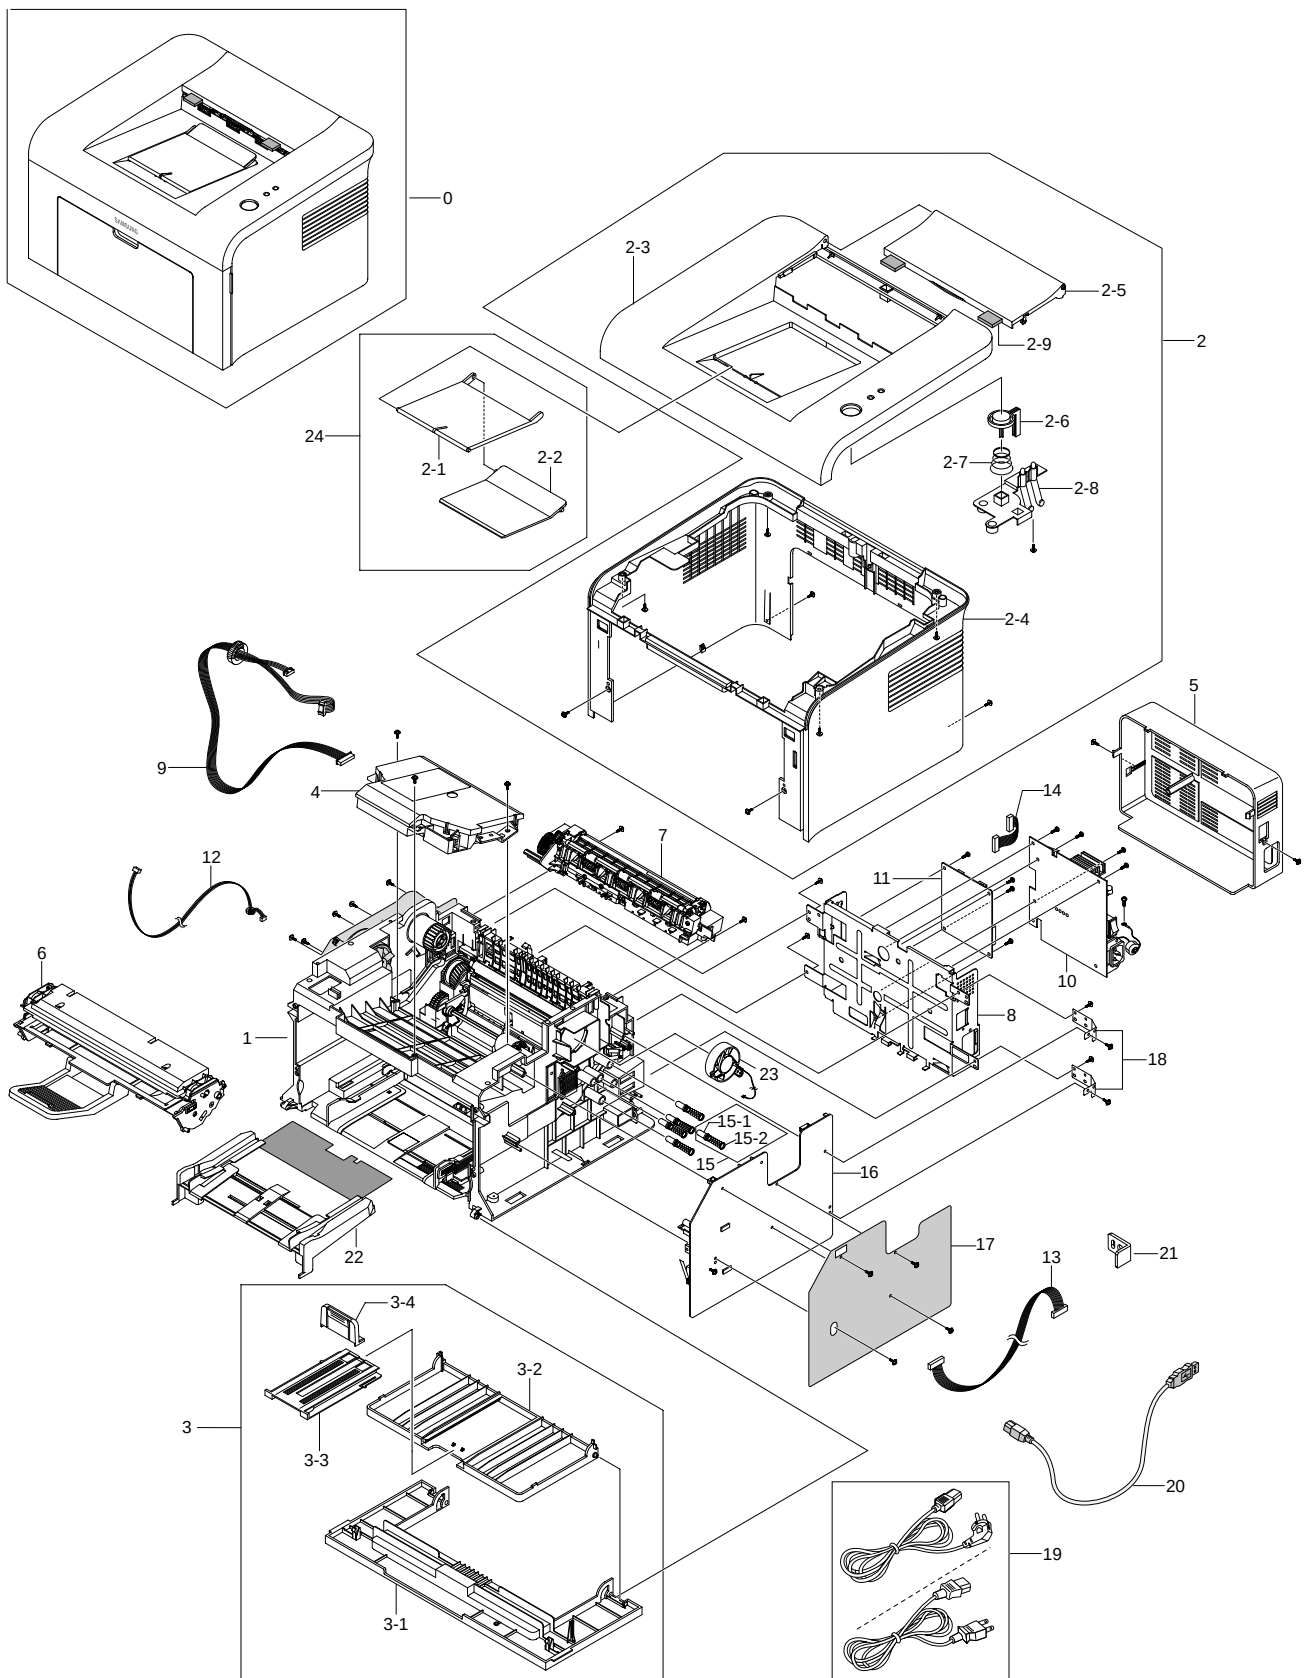


7.2 Frame Assembly


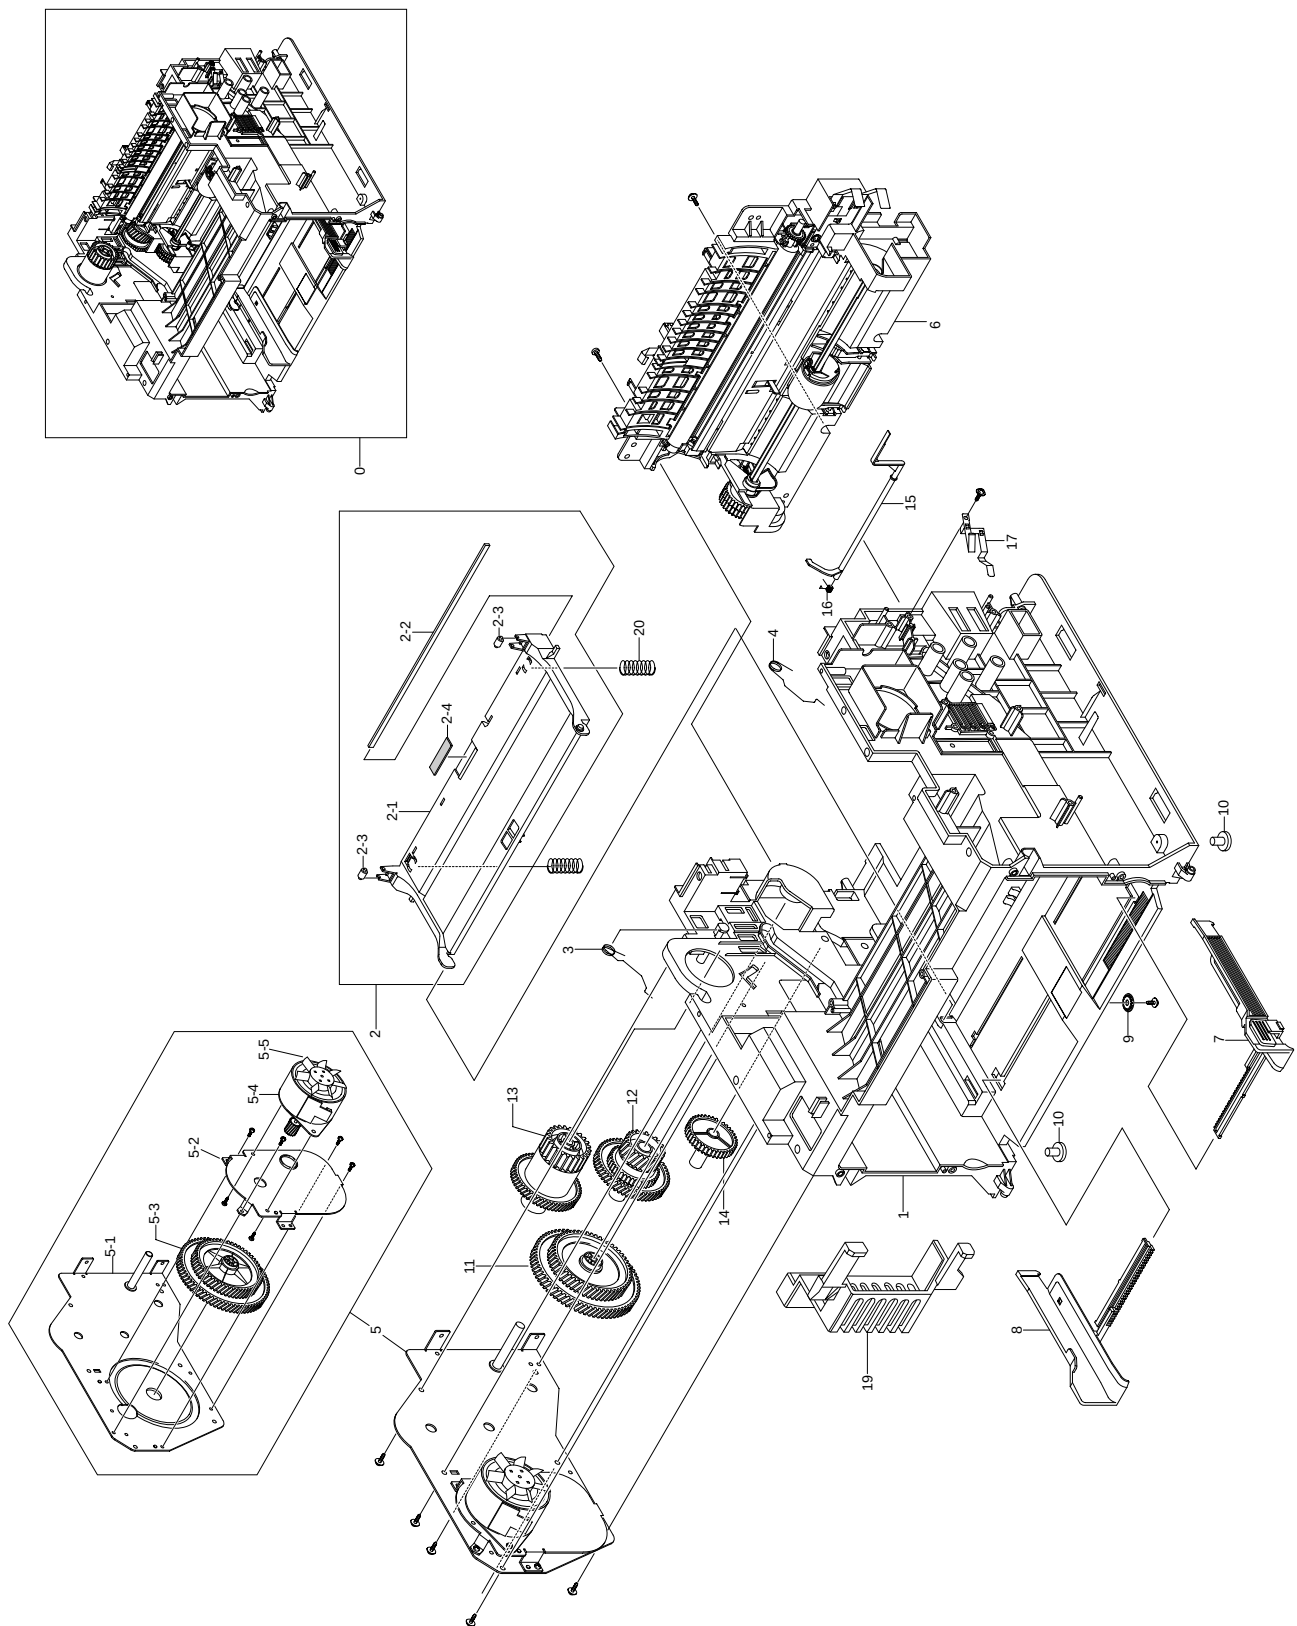


7.3 Fuser Unit

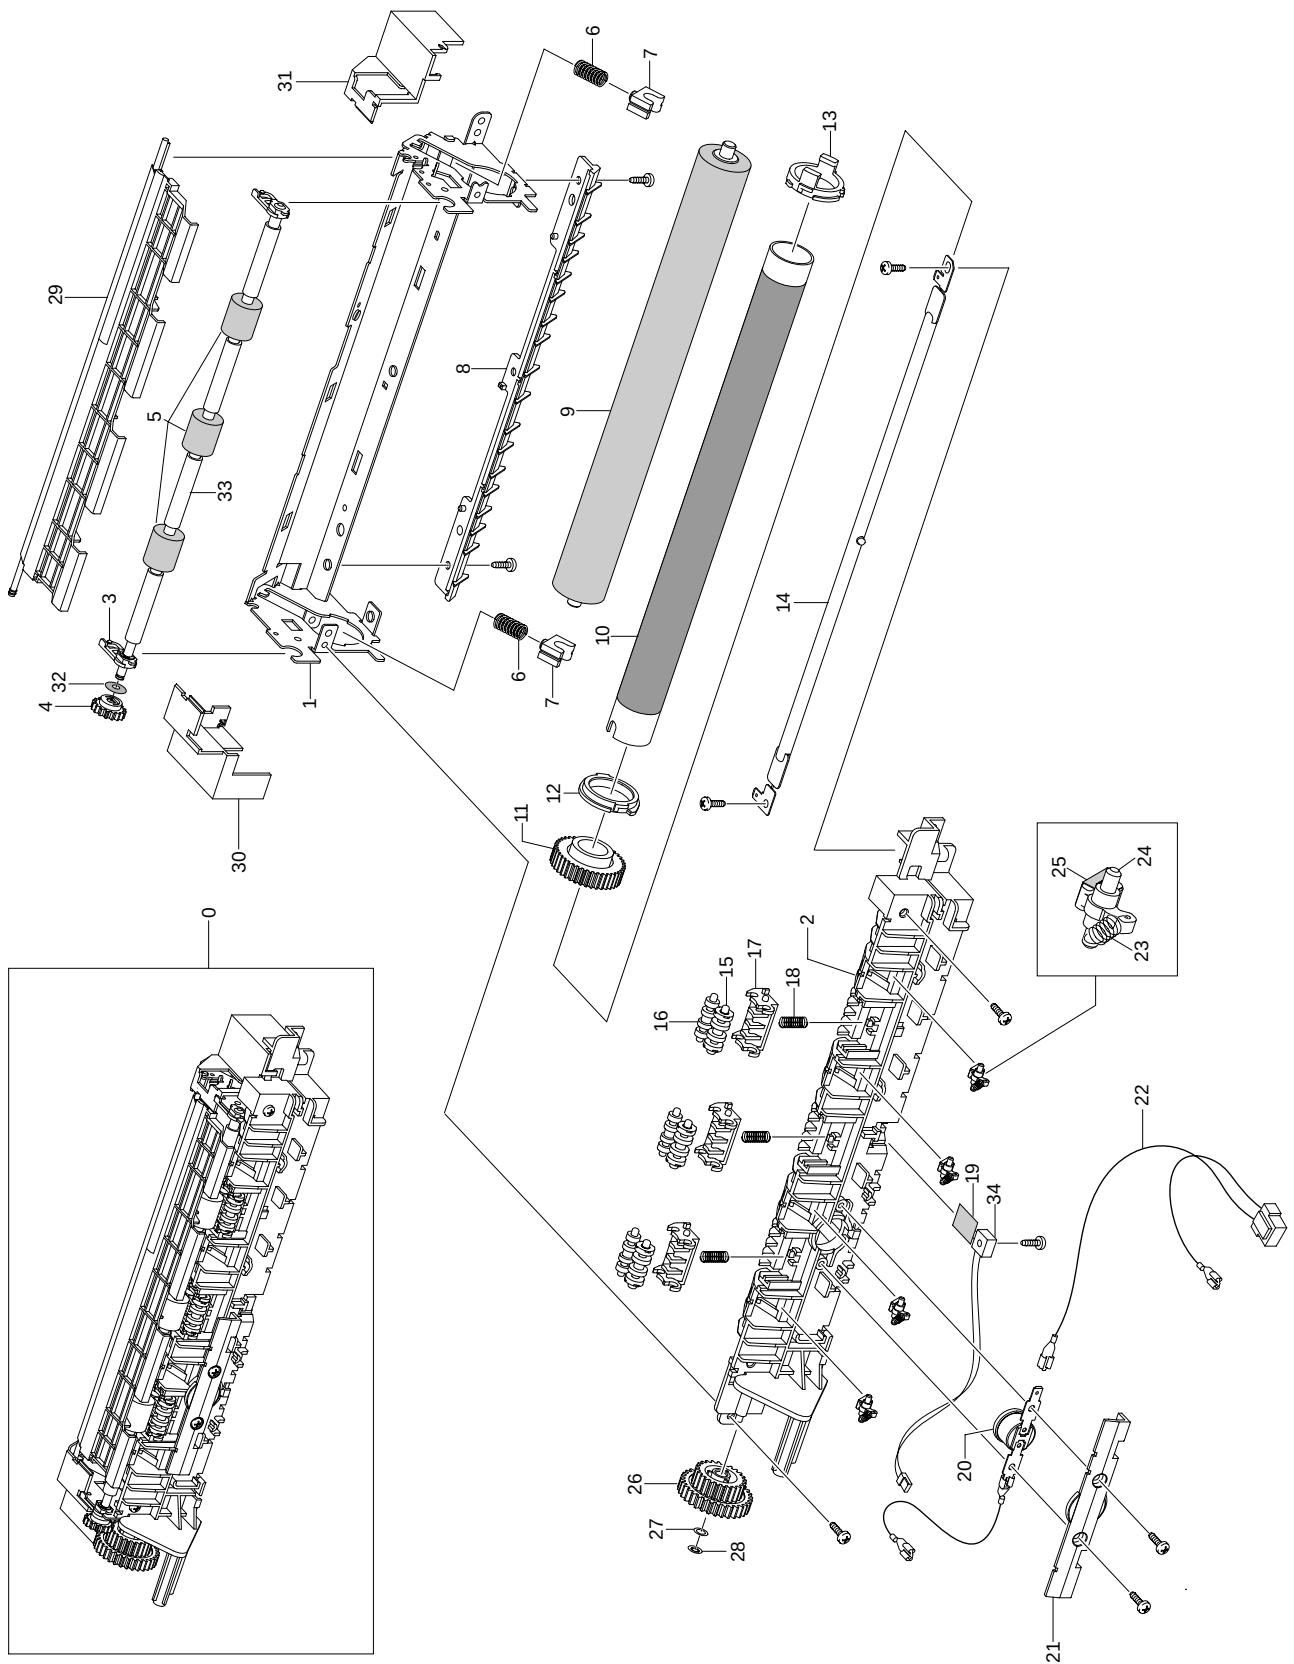

7.4 Paper Path Unit

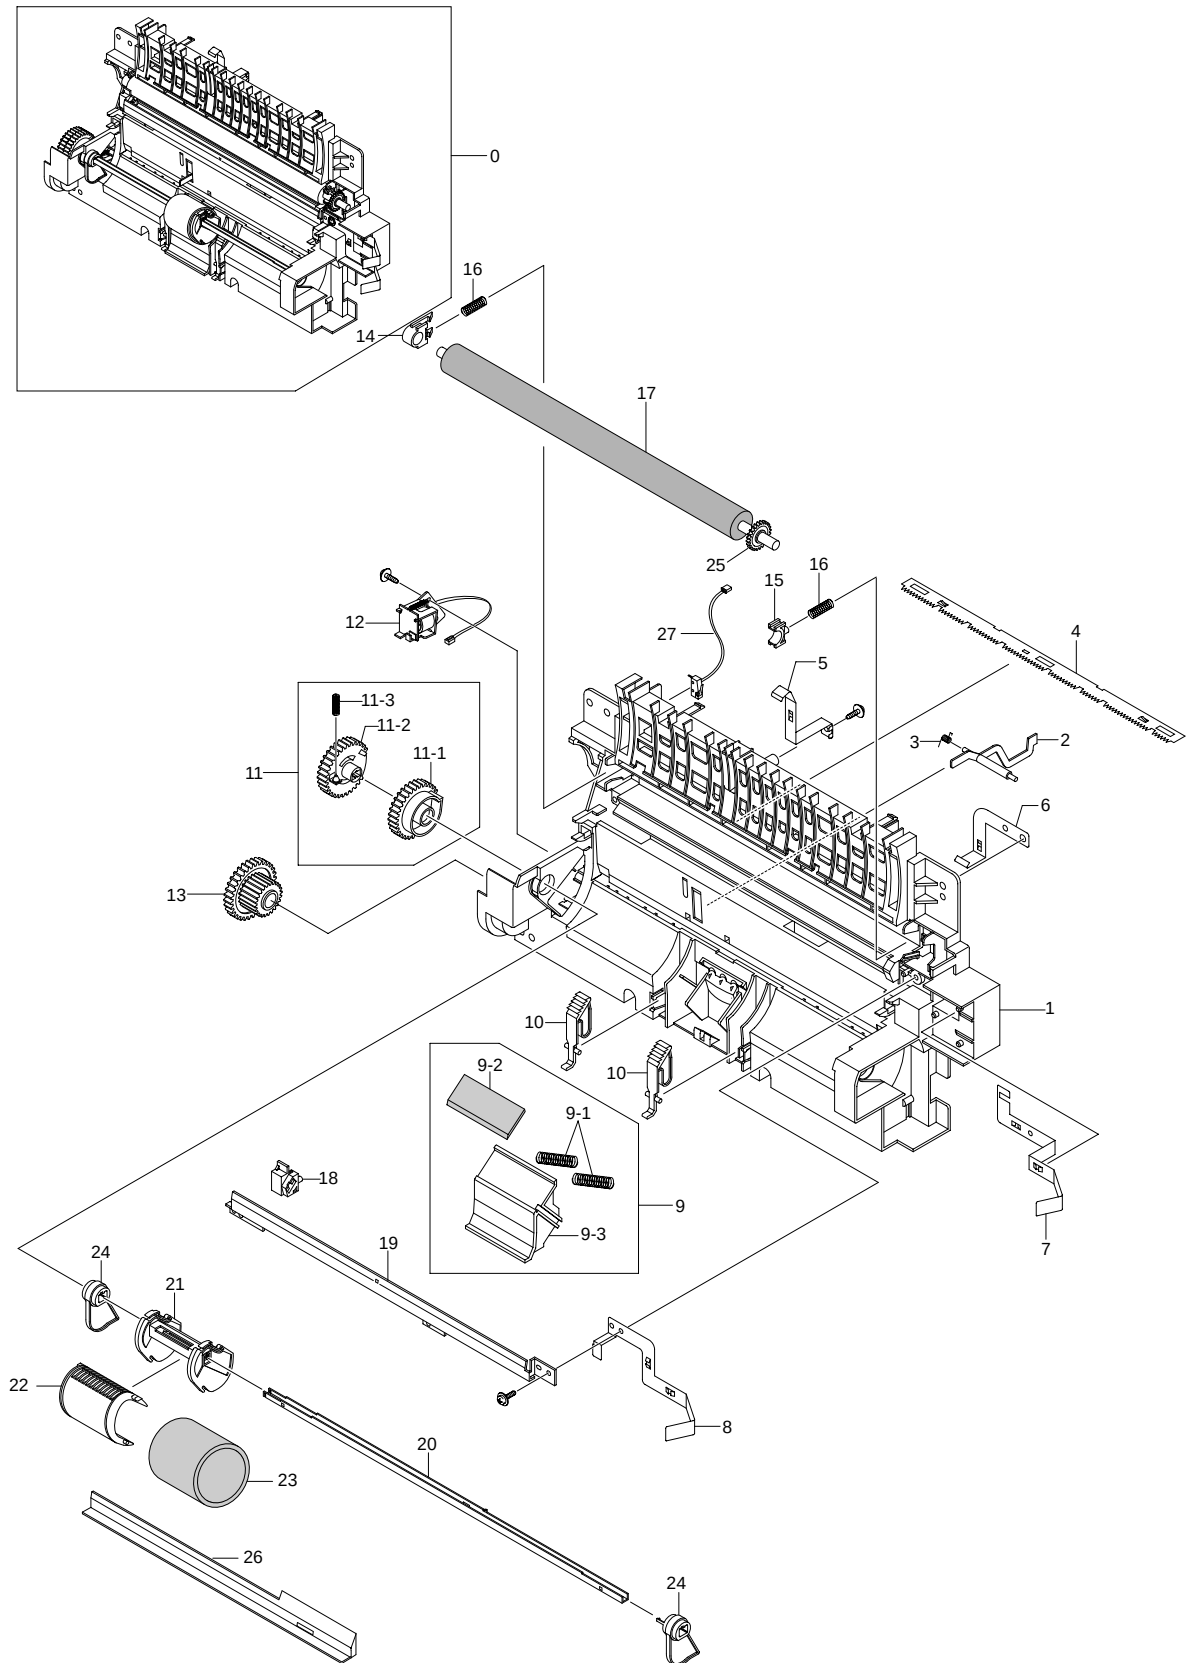

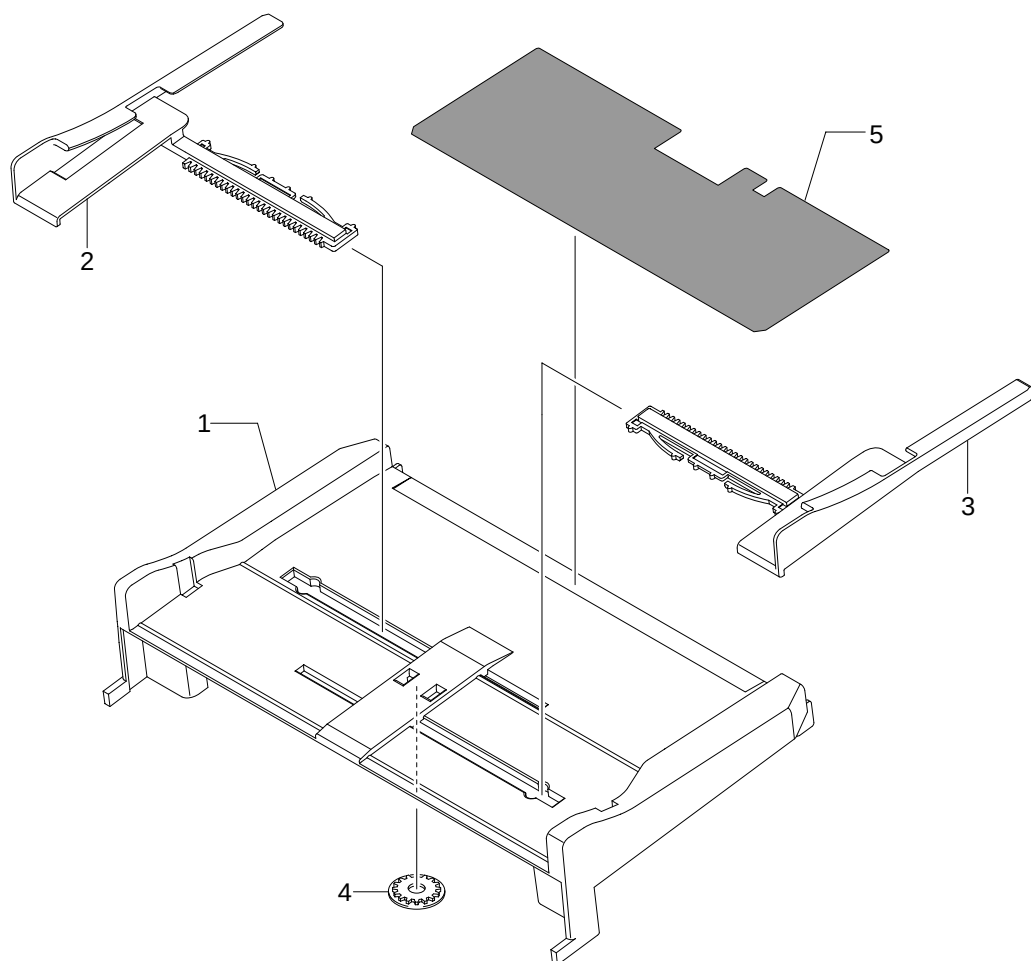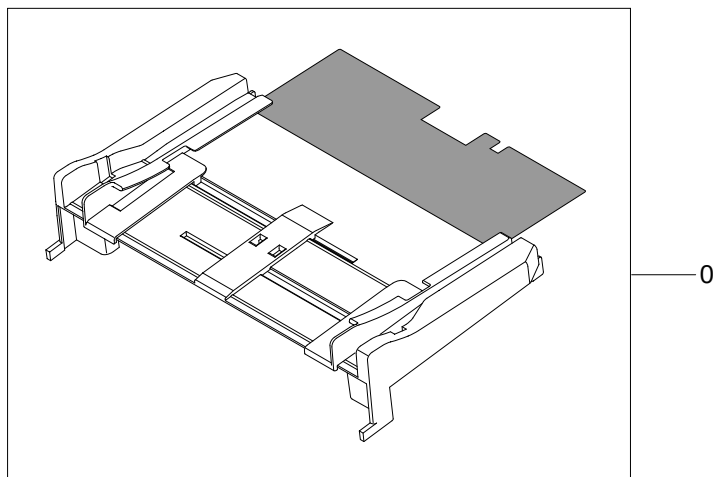

Service Parts List(Model: ML-2010P/SEE)

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer #	SEC Code	Description & Specification	Location	Service
7.1-1	JC96-03349C	ELA UNIT-FRAME LOW SN;ML-2010,SAMSUNG,-,-		SA
7.1-2	JC97-02329G	MEA-COVER MAIN;ML-2010P,SAMSUNG,-,-,-,-		SA
7.1-2-1	JC61-01155A	GUIDE-M-SHACKER RX;ML-1610,HIPS,2,108,11		SA
7.1-2-2	JC61-01156A	GUIDE-M-SUB SHACKER;ML-1610,HIPS,2,82,10		SA
7.1-2-3	JC63-00618P	COVER-M TOP;ML-2010P/SEE,HIPS,2,3,254,5,		SNA
7.1-2-4	JC63-00619A	COVER-M-MAIN;ML-1610,HIPS,2,252,352,HB,-		SNA
7.1-2-5	JC63-00620A	COVER-M-JAM;ML-1610,HIPS,2,78,227,4,HB,-		SA
7.1-2-6	JC64-00184A	KEY-M-ONLINE;ML-1610,ABS,L29*H21.5*PHI21		SNA
7.1-2-7	JC66-00816A	LEVER-M-ACTUATOR JAM;ML-1610,PC,-,18,5,6	A1013	SA
7.1-2-8	JC67-00079A	LENS-M LED;ML-1610,PMMA,TRANSPARENT,L65.		SNA
7.1-2-9	JC72-01001A	PMO-SUB SHACKER;ML-1400,PC,-,32*4.8*25.5	Z5092	SA
7.1-3	JC97-02176A	MEA UNIT-COVER FRONT;ML-1610,SAMSUNG,-,-		SA
7.1-3-1	JC63-00616A	COVER-M FRONT(DEVE);ML-1610,HIPS,2,5,139		SNA
7.1-3-2	JC63-00617A	TRAY-M-CASSETTE;ML-1610,HIPS,2,277,108,H		SNA
7.1-3-3	JC63-00628A	TRAY-M-EXTENSION LARGE;ML-1610,HIPS,2,7		SNA
7.1-3-4	JC63-00722A	SHEET-HVPS;ML-1610,PP PP,T0.254,155,201,		SA
7.1-4	JC59-00023A	UNIT-LSU;ML-1610,-,-,16,20PPM,1 LIGHT SO	L7012	SA
7.1-5	JC63-00621B	COVER-M SMPS_PRL;ML-1610,ABS,2,157,245,9		SNA
7.1-6	JC96-03354A	ELA UNIT-DEV KIT 1K;ML-1610,SEC,-,-,INIT		SNA
7.1-7	JC96-03401A	ELA HOU-FUSER 220V;ML-1610,SAMSUNG,-,FUS		SA
7.1-8	JC63-00632A	SHIELD-P-ENGINE;ML-1610,SECC,T0.8,141,2,		SA
7.1-9	JC39-00481A	CBF HARNESS-LSU;ML-2010,#26,UL 1061,11PI		SA
7.1-10	JC44-00087A	SMPS-V2C;SCX-4521F,*AC/DC,-,220V~230VAC		SA
7.1-11	JC92-01706A	PBA MAIN-P1284;ML-2015,SEC,KOREA,-,-,-,-		SA
7.1-12	JC39-00405A	CBF HARNESS-MOTOR;ML-1610,CBF HARNESS,UL		SA
7.1-13	JC39-00400A	CBF HARNESS-HVPS;ML-1610,WIRE HARNESS,UL		SA
7.1-14	JC39-00402A	CBF HARNESS-SMPS;ML-1610,WIRE HARNESS,UL		SA
7.1-15	JC96-01672A	ELA UNIT-TERMINAL TR L;ML-6060A,SEC,220V	K3197	SA
7.1-15-1	JC61-00031A	SPRING ETC--HV LARGE;ML-6060A,SUS 304 WP	Z4197	SA
7.1-15-2	JC70-40912A	ICT-SHAFT HV LARGE;ML-5000A,SWCH18A,-,?,4	S4027	SA
7.1-16	JC44-00079A	HVPS-SKYLARK,-,24V,21.6V~27.6V,-,MAX 5KV	S7027	SA
7.1-18	JC63-00631A	GROUND-P-HVPS;ML-1610,SUS304CSP 1/2H,0,2	K3232	SNA
7.1-19	3903-000042	CBF-POWER CORD;DT,EU,FP3/YES,IEC320 C13/	C0022	SA
7.1-20	JC61-01170A	PLATE-P-CHANNEL;ML-1610,SECC,1.2,8,12,9,		SA
7.1-21	JC97-02239A	MEA UNIT-MP TRAY;SCX-4521F,SEC,-,MP-TRAY		SA
7.1-22	JC31-00027A	FAN-DC HUMMINGBIRD,-,ML-1710,-,-,-	F5019	SA
7.2-1	JC61-01152A	FRAME-M-BASE;ML-1610,ABS(VE-0860P),-,-,B	B0080	SNA
7.2-2	JC97-02218A	MEA UNIT-PLATE KNOCK UP;ML-1610,SAMSUNG,	K3602	SA
7.2-2-1	JC61-01158A	PLATE-M-KNOCK UP;ML-1610,HIPS HB,T2,W80,	K5002	SA
7.2-2-2	JC66-00720A	SHAFT-P-CORE;ML-1750,SECC 1.2T,203,-,-,-	P2158	SA
7.2-2-3	JC72-01004A	PMO-IDLE KNOCK UP MP;ML-2150,POM,BLK,-,M	P0041	SA
7.2-2-4	JC74-00011A	MPR-PAD KNOCK UP MP;ML-6060A,CR+CORK,10*	K5007	SA
7.2-3	JC61-01258A	SPRING ETC-TORSION DEVE L;ML-1610,SUS304	Z4271	SA
7.2-4	JC61-01259A	SPRING ETC-TORSION DEVE R;ML-1610,SUS304	Z4272	SA
7.2-5	JC96-03592A	ELA UNIT-RX DRIVE;ML-2010,SAMSUNG,-,SNIP	D4033	SA
7.2-5-1	JC61-01465A	BRACKET-P-GEAR SN;ML-2010,SECC,T1,2,110,		SNA
7.2-5-2	JC61-01449A	BRACKET-P-MOTOR;ML-2010,SECC,2,0,45,6,11		SNA
7.2-5-3	JC66-00804A	GEAR-RDCN 139/83;ML-1610,POM,0.5/0.6,139	G0383	SA
7.2-5-4	JC31-00037D	MOTOR STEP-MAIN;M55SP-2NK,ML-2010,1,2A,7	M2159	SA
7.2-5-5	JC72-00825A	PMO-IMPELLER DRV;ML-6200,NYLON66,BLK,-,-	K4023	SNA
7.2-6	JC97-02327A	MEA UNIT-FRAME PATH;ML-2010,SAMSUNG,-,-,-		SA
7.2-7	JC70-00500A	ADJUST-M-CASSETTE R;ML-1610,ABS,2,5T,120		SA
7.2-8	JC70-00499A	ADJUST-M-CASSETTE L;ML-1610,ABS,2,5T,120		SA
7.2-9	JG66-40003A	GEAR-PINION;SF4000,POM,WHT,M1,Z16	G0035	SA
7.2-10	JC61-00836A	FOOT-FRONT;ML-1750,NBR,D7,-,11.5,-,-	F1011	SA
7.2-11	JC66-00805A	GEAR-RDCN 113/83;ML-1610,POM,0.6/0.6,113	G0381	SA
7.2-12	JC66-00806A	GEAR-OPC DR 76/38/29;ML-1610,POM,0.6/0.8	D4047	SA
7.2-13	JC66-00807A	GEAR-FUSER DR 63/35;ML-1610,POM,0.6/0.8,	F4086	SA
7.2-14	JC66-00808A	GEAR-FEED DR 41;ML-1610,POM,0.8,41,-,WHI	F6076	SA
7.2-15	JC66-00822A	LEVER-M-ACTUATOR EMPTY;ML-1610,ABS,-,27,	K3816	SA
7.2-16	JB61-00076A	SPRING ETC-TORSION DOC (CC2-F);SCX-1110F	Z4274	SA
7.2-17	JC63-00622A	GROUND-P-OPC;ML-1610,SUS304CSP 1/2H,0,2,	D4053	SA
7.2-18	6107-001240	SPRING-CS;SUS304-WPB,GROUND END,P10.6,D1	D4084	SA
7.2-19	JC67-00110A	CAP-M-MOTOR;ML-1610,HIPS,2,0,60,5,52,4,	A0003	SNA
7.2-20	JC61-00025A	SPRING ETC-CS-CHARGE APOLLO;SF-5100,SUS	B2030	SNA
7.3-1	JC61-01162A	FRAME-P-FUSER;ML-1610,SECC,-,-,-,1,264,	F2122	SNA
7.3-2	JC63-00615A	COVER-M FUSER;ML-1610,PET+GF30%,2,72,311	Z2149	SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer #	SEC Code	Description & Specification	Location	Service
7.3-3	JC61-01177A	HOLDER-M-EXIT R;ML-1610,PC,1.5,10,20,BLK	H4027	SA
7.3-4	JC66-00810A	GEAR-EXIT_DRV17;ML-1610,POM,0.8,17,-,BLK	E4038	SA
7.3-5	JC61-01172A	HOLDER-M-EXIT F/DOWN;ML-1610,PC,T2.0,W18	H4026	SNA
7.3-6	6107-001168	SPRING-CS;PW-2,-,PI0.95,D5.95,L16,-,ID	D4085	SA
7.3-7	JC66-10901A	BEARING-PRESSURE/R;ML-165,PPS(RBA313N),-	P6004	SA
7.3-8	JC61-00595A	GUIDE-M-INPUT;ML-1710,PET+GF30%,-,-,BL	K3960	SNA
7.3-9	JC66-00600A	ROLLER-PRESSURE;ML-1710,SUM24L+LSR+PFA,2	P6014	SA
7.3-10	JC66-00601A	ROLLER-HEAT;ML-1710,AL 5052+PFA,20.3,247	H2010	SA
7.3-11	JC66-00564A	GEAR-FUSER, Z37;ML-1710,PPS OFL4036,0.8,	F4094	SA
7.3-12	JC61-00589A	BUSH-M-HR L;ML-1710,PPS(RBA313N),-,-,-	K2879	SA
7.3-13	JC61-00590A	BUSH-M-HR R;ML-1710,PPS RBA313N,-,-,-,-	K2880	SA
7.3-14	4713-001202	LAMP-HALOGEN;230V,-,600W,-,-,-,6X284MM		SA
7.3-15	JC66-00824A	ROLLER-M-EXIT MAIN;ML-1610,POM,8.5,L23.6	R1083	SNA
7.3-18	6107-001163	SPRING-CS;SUS304-WPB,-,PI0.4,D3.9,L13,-,	D4086	SA
7.3-19	1404-001298	THERMISTOR-NTC;7KOHM,-,3370K,0.3MW/C,-,-	W3071	SA
7.3-20	JC47-00005B	THERMOSTAT-150;ML-1610,-,125/250V,15/10A	K4279	SA
7.3-21	JC39-00404A	CBF HARNESS-FUSER JOINT;ML-1610,WIRE HAR	H1089	SA
7.3-23	JC61-00064A	SPRING ETC-CLAW;ML-5200A,SUS 304 WPB,?0.	B2031	SA
7.3-24	JC61-00584A	HOLDER-M-PLATE CLAW;ML-1710,PPS+GF40%,-,-	H4031	SA
7.3-25	JC61-00605A	PLATE-P-CLAW;ML-1710,SUS304-CSP,0.1,-,-,	H4032	SNA
7.3-26	JC66-00801A	GEAR-EXIT_DR38/25;ML-1610,POM,0.8,38/25,	E4039	SNA
7.3-27	6031-001051	WASHER-PLAIN;M4,ID4.1,OD7.0,T0.13,*POLY	S2004	SNA
7.3-29	JC63-00637A	COVER-M-FUSER-DUMMY;ML-1610,PET+GF30%,2,		SNA
7.3-30	JC63-00639A	COVER-M-LAMP-L;ML-1610,PET+GF30%,2,44.32		SNA
7.3-31	JC63-00638A	COVER-M-LAMP-R;ML-1610,PET+GF30%,2,25.31		SNA
7.3-32	6044-000001	RING-CS;ID3,OD3,T0.25,BLACK,SUS304	D4088	SNA
7.3-33	JC66-00826A	ROLLER-EXIT F/DOWN;ML-1610,SUM22L+EPDM,1	E4159	SA
7.3-34	JC67-00085A	CAP-M-THERMO;ML-1610,PET+GF30%,1.2,11.92	H4087	SNA
7.4-1	JC61-01161A	GUIDE-M-PAPER PATH;ML-1610,ABS HB,-,140,	G2069	SA
7.4-2	JC66-00814A	LEVER-ACTUATOR FEED SENSOR;ML-1610,PC,-,	E7006	SA
7.4-3	JB61-00107A	SPRING ETC-LEVER SENSOR;SF-430,SUS304,0.		SA
7.4-4	JC70-10232A	IPR-PLATE SAW;ML-80,SUS304 CSP 1/2H,-,T0	K3377	SA
7.4-5	JC63-00625A	GROUND-P-VARISTOR;ML-1610,SUS304CSP1/2H,	W3076	SNA
7.4-6	JC63-00624A	GROUND-P-ZENER;ML-1610,SUS304CSP 1/2H,0.		SNA
7.4-7	JC63-00623A	GROUND-P-THV;ML-1610,SUS304CSP 1/2H,0.2,	W3078	SNA
7.4-8	JC63-00626A	GROUND-P-SAW;ML-1610,C5210P,0.2,27.9,49.	W3079	SNA
7.4-9	JC97-02217A	MEA UNIT-HOLDER_PAD;ML-1610,SAMSUNG,-,-,	P0015	SA
7.4-9-1	JC61-70911A	SPRING ETC-EXIT ROLL FD;ML-165,SUS304 WP	S0021	SA
7.4-9-3	JC61-01169A	HOLDER-M-PAD;ML-1610,PC,1.7,39.5,33.4,BL	H4029	SA
7.4-10	JC66-00815A	LEVER-M-KICKER P/U;ML-1610,POM,-,10.5,31	R1120	SNA
7.4-11	JC97-02179A	MEA UNIT-PICK UP GEAR;ML-1610,SAMSUNG,-,	P2093	SA
7.4-11-1	JC66-00803A	GEAR-PICK_UP B;ML-1610,POM,0.8,33,-,WHIT	P2056	SA
7.4-11-2	JC66-00802A	GEAR-PICK_UP A;ML-1610,POM,0.8,33,-,WHIT	P2057	SA
7.4-11-3	6107-001167	SPRING-CS;SUS304-WPB,-,PI0.25,D3.25,L9.6	D4089	SA
7.4-12	JC33-00015B	SOLENOID-MP_R2,-,SCX-4720F,DC24V,-,-,-	S8014	SA
7.4-13	JC66-00809A	GEAR-FEED 35/19;ML-1610,POM,0.8/0.8,35/1	F6071	SA
7.4-14	JC61-00588A	BUSH-M-TR L;ML-1710,POM(M90-44),-,-,BL	K2886	SA
7.4-15	JC72-00102A	PMO-BUSHING_TR(L);SF-5100,POM (CH-15),BL	K3856	SA
7.4-16	JC61-70940A	SPRING ETC-TR(12);ML-5500,-,4.5,-,12.7,1	Z4277	SA
7.4-17	JC66-00725A	ROLLER-TRANSFER;SCX-4100,NBR+ECO+SUM24L+	T3014	SA
7.4-18	JC61-00583A	HOLDER-PTL;ML-1710,PC,-,-,-,BLK,V0	H4041	SA
7.4-19	JC70-00307A	IPR-P-EARTH TRANSFER;ML-1710,SECC,-,1.0T	K3367	SA
7.4-20	JC66-00829A	SHAFT-P-PICK_UP;ML-1610,SECC,264,T1.2,-,	P2160	SA
7.4-21	JC61-01151A	HOUSING-M-PICK_U;ML-1610,POM,-,-,35,NATU	P2067	SA
7.4-22	JC61-01173A	HOUSING-M-PICK_UP B;ML-1610,ABS HB,-,-,3	P2068	SA
7.4-23	JC73-00211A	RUBBER-PICK_UP;ML-1610,EPDM+IR,MM,-,-,-	P2148	SA
7.4-24	JC66-00811A	CAM-M-PICK_UP;ML-1610,POM,4,W21*PHI12,NT	P2042	SA
7.4-25	JC66-00813A	GEAR-TRANSFER;ML-1610,POM,0.6,24,-,BLK,1	G0448	SA
7.4-26	JC61-01281A	BRACKET-P-BAR_PICK_UP;ML-1610,SECC,T1.0,		SNA
7.4-27	JC39-00482A	CBF HARNESS-MICRO SW;ML-2010,WIRE HARNES		SA
7.5-1	JC61-01263A	PLATE-M_MP;SCX-4521F,HIPS,2.5,278.2,123,		SA
7.5-2	JC70-00514A	ADJUST-M_MP L;SCX-4521F,HIPS,2.5,127.8,		SA
7.5-3	JC70-00515A	ADJUST-M_MP R;SCX-4521F,HIPS,2.5,127.8,9		SA
7.5-5	JC63-00711A	SHEET-MP;SCX-4521F,PET,T0.188,215.0,60.8	P2162	SA
	6107-001169	SPRING-CS;SUS304-WPB,-,PI0.55,D9.3,14.25		SA
#N/A	0201-001183	ADHESIVE-AA;ARON ALPHA #202F,NTR,100,20G		SNA
#N/A	0201-001162	ADHESIVE-CYA;LOCTITE403,NTR,1250,20G		SNA
#N/A	0201-001235	ADHESIVE-TS;DEH-390D,RED,400,-		SNA
#N/A	6902-000455	BAG CONDUCTIVE;LDPE,T0.1,W200,L450,BLK,-		SA
#N/A	6902-000437	BAG PE;HDPE,T0.015,W900,L800,TRP,8,4PE M		SNA
#N/A	6902-000288	BAG PE;LDPE,T0.05,W250,L450,TRP,8,2-		SNA
#N/A	3301-001425	BEAD-SMD;120ohm,3.2x1.6x1.1mm,900mA,TP,,		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer #	SEC Code	Description & Specification	Location	Service
#N/A	JC61-01464A	BLADE-P_SUS;ML-2010,SUS301-CSP 1/2H T0.0		SNA
#N/A	JC69-00825A	BOX(P)-POWER PAD;COMMON,SHEET,TOMSON,-,1		SNA
#N/A	JC69-00818H	BOX-MAIN;ML-2010P/SEE,SW,OFFSET3,308,446		SA
#N/A	JC61-01165A	BRACKET-P-CLEANING;ML-1610,SECC,1.2T,-,2		SNA
#N/A	JC61-01166A	BRACKET-P-SUS BLADE;ML-1610,SPCC+NI,1.2T		SNA
#N/A	2401-000042	C-AL;100uF,20%,16V,GP,TP,6.3x7,5		SA
#N/A	2401-001185	C-AL;33uF,20%,35V,GP,TP,5x11,5		SNA
#N/A	JC67-00081A	CAP-M-HOUSING INITIAL;ML-1610,ABS,T1.5,6		SNA
#N/A	JC67-00080A	CAP-M-SPACER_R;ML-1610,ABS,-,12,22.5,BLK		SNA
#N/A	JC67-00083A	CAP-M-WTB;ML-1610,ABS,T1.5,29,250.3,BLK		SNA
#N/A	JC39-00403B	CBF HARNESS-FUSER(220V);ML-1610,WIRE HAR		SA
#N/A	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608		SA
#N/A	2203-000626	C-CER,CHIP;0.022nF,5%,50V,C0G,1608		SA
#N/A	2203-000815	C-CER,CHIP;0.033nF,5%,50V,C0G,1608		SA
#N/A	2203-001683	C-CER,CHIP;0.068nF,5%,50V,NP0,1608		SA
#N/A	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608		SA
#N/A	2203-001607	C-CER,CHIP;0.22nF,5%,50V,NP0,1608		SA
#N/A	2203-001408	C-CER,CHIP;0.27nF,5%,50V,NP0,1608		SNA
#N/A	2203-000783	C-CER,CHIP;0.33nF,5%,50V,C0G,1608		SA
#N/A	2203-005819	C-CER,CHIP;1000nF,+80-20%,16V,Y5V,-,1608		SNA
#N/A	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1608		SA
#N/A	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608		SNA
#N/A	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,1608		SA
#N/A	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608		SA
#N/A	2203-002392	C-CER,CHIP;220nF,+80-20%,50V,Y5V,2012		SA
#N/A	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,1608		SA
#N/A	3702-000118	CONNECTOR-RIBBON;36P,FEMALE,ANGLE,AU		SNA
#N/A	JC63-00712A	COVER-M_PAPER;SCX-4521F,ABS,2.5,269.97,1		SA
#N/A	2801-003886	CRYSTAL-UNIT;12MHz,50ppm,28-AAA,16pF,50o		SNA
#N/A	JC69-00739A	CUSHION-EPS SET(SKYL);ML-1610,EPS,-,505,		SNA
#N/A	0407-000122	DIODE-ARRAY;KDS226,80V,300mA,C2-3,SOT-23		SA
#N/A	0402-000129	DIODE-RECTIFIER;1N4003,200V,1A,DO-41,TP		SA
#N/A	0401-000116	DIODE-SWITCHING;MMSD914T1,100V,200MA,SOD		SNA
#N/A	JC66-00823A	DRUM-OPC;ML-1610,AL A30 OR A60,-,24,248,		SNA
#N/A	JC96-03651A	ELA HOU-ENGINE_P;ML-2010,SAMSUNG,RUSIA,-		SNA
#N/A	JC96-03352R	ELA UNIT-DEVE INITIAL;ML-2010,SAMSUNG,EX		SNA
#N/A	JC70-00483A	ELECTRODE-P_SR(M);SCX-4100,SUS301-CSP T0		SNA
#N/A	JC70-00501A	ELECTRODE-P-DEVE KEY;ML-1610,SUS304CSP1/		SNA
#N/A	JC63-00891A	FELT-FRAME NOISE L;ML-2010,POLYESTER RAY		SNA
#N/A	JC63-00892A	FELT-FRAME NOISE R;ML-2010,POLYESTER RAY		SNA
#N/A	2901-001178	FILTER-EMI SMD;25V,2A,-,100000pF,2x1.25x		SA
#N/A	0204-002978	FLUX;KSP-70L,-,84%,FLUX,SPRAY		SNA
#N/A	JC61-01184A	FRAME-M_WTB INITIAL;SCX-4521F,ABS+GF20,-		SNA
#N/A	JC61-01163A	FRAME-M-DEVE LOWER;ML-1610,ABS,-,HB,BLK,		SNA
#N/A	JC66-00817A	GEAR-AGITATOR;ML-1610,POM,0.6,24,-,NTR,2		SNA
#N/A	JC66-00820A	GEAR-DEVE;ML-1610,POLYKETONE,0.8,14,-,NT		SNA
#N/A	JC66-00012A	GEAR-OPC R;SF-5100,POM(M90-44),BLK,M0.6,		SA
#N/A	JC66-00821A	GEAR-OPC_L;ML-1610,PC+PTFE,0.8,30,-,BLK,		SNA
#N/A	JC66-00818A	GEAR-RDCN;ML-1610,POM,0.8/0.6,-,NTR,-,		SNA
#N/A	JC66-00819A	GEAR-SUPPLY;ML-1610,POM,0.6/0.6,20/19,-,		SNA
#N/A	0205-000005	GREASE-BEARING;EP56,DIAMOND HYDRO FLUID,		SNA
#N/A	0205-001088	GREASE-BEARING;NICHIMOLY DM-1770X,PTFE,-		SNA
#N/A	0205-001003	GREASE-BEARING;NYOGEL788,DAMPING GREASE,		SNA
#N/A	0205-001059	GREASE-BEARING;PETAMO GHV 133,BEIGE,15KG		SNA
#N/A	0205-001056	GREASE-GRAPHITE;CRS841,WHT,-		SNA
#N/A	0205-001067	GREASE-GRAPHITE;NYOGEL 756G,HYDRO CARBON		SNA
#N/A	JC64-00185A	HANDLE-M-DEVE;ML-1610,HIPS,T1.5,110,125,		SNA
#N/A	3711-002812	HEADER-BOARD TO CABLE;BOX,11P,1R,2mm,STR		SNA
#N/A	3711-002001	HEADER-BOARD TO CABLE;BOX,20P,2R,2MM,STR		SA
#N/A	3711-003969	HEADER-BOARD TO CABLE;BOX,2P,1R,2.5mm,ST		SNA
#N/A	3711-003942	HEADER-BOARD TO CABLE;BOX,2P,1R,2MM,STRA		SA
#N/A	3711-003409	HEADER-BOARD TO CABLE;BOX,3P,1R,2mm,STRA		SNA
#N/A	3711-003410	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,STRA		SNA
#N/A	3711-002810	HEADER-BOARD TO CABLE;BOX,9P,1R,2mm,STRA		SNA
#N/A	JC13-00027A	IC ASIC-JUPITER4E;S4FD004X,ML-1520,160P,		SA
#N/A	1205-002339	IC-CLOCK GENERATOR;CY25811SC,SOIC,8P,150		SA
#N/A	0801-002446	IC-CMOS LOGIC;74LCX14,SCHMITT INVERTER,T		SNA
#N/A	0801-000794	IC-CMOS LOGIC;7S08,AND GATE,SOT-25,5.63M		SA
#N/A	1105-001464	IC-DRAM;K4S641632,4MX16BIT,T SOP(II),54P,		SA
#N/A	1103-001228	IC-EEPROM;93C66,4KBIT,256X16BIT,SOP,8P,5		DNA
#N/A	1006-001224	IC-LINE TRANSCEIVER;74LVX161284,TSSOP,48		SA
#N/A	1003-001535	IC-MOTOR DRIVER;A3977SLP,TSSOP,28P,9.6X4		SA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer #	SEC Code	Description & Specification	Location	Service
#N/A	1203-002220	IC-POSI.ADJUST REG.;LD1117,DPAK,3P,240MI		SA
#N/A	1203-001455	IC-POSI.FIXED REG.;1117,DPAK,3P,265MIL,P		SA
#N/A	1203-002233	IC-RESET;XC61F,SOT-23,3P,-,PLASTIC,0.7/1		SNA
#N/A	1202-000164	IC-VOLTAGE COMP.;393,SOP,8P,150MIL,DUAL,		SA
#N/A	JC99-01882V	INA-ACCESSORY;ML-2010P/SEE,SEC,EUROPE,SN		SNA
#N/A	JC99-01885A	INA-MATERIAL(A4);ML-1610,SAMSUNG,-,MATER		SNA
#N/A	JC70-00153A	IPR-ELECTRODE CHARGE;ML-4500,SUS301,-,8.		SNA
#N/A	3722-001101	JACK-USB;4P/1C,AU,IVR,ANGLE,B TYPE		SA
#N/A	JB68-00916A	LABEL RATING-BLANK;SF-340,SEC,TETRON,0.0		SNA
#N/A	JC68-01584A	LABEL(P)-BLANK 90*25;CLP-510,SEE,ART 100		SA
#N/A	JC68-10932B	LABEL(P)-BLANK(YELLOW);ML-1710,-,ART,100		SNA
#N/A	JC68-30928D	LABEL(P)-CAUTION, HOT_FUSER;ML-1210,PET,		SNA
#N/A	JC68-10914D	LABEL(P)-SERIAL NO;ML-85,ART,70X15,G100,		SNA
#N/A	JB68-00073A	LABEL(R)-BAR CODE;SF-3000,PY,38X6.5,T0.1		SNA
#N/A	JC68-00573A	LABEL(R)-BARCODE;ML-4500,PET,T0.05,10mm,		SNA
#N/A	JC68-00407A	LABEL(R)-HV FUSER;ML-6060,PVC,-,220V,-,,	L0006	SNA
#N/A	JC68-00690A	MANUAL-(CARD)WARRANTY CARD;ML-1210,XEU,E		SNA
#N/A	JC68-01493B	MANUAL-DEVE SHEET;SCX-4521F,SEE,EFGLSPRS		SNA
#N/A	JC68-01495A	MANUAL-QIG;COMMON,SEE,WORLD_WIDE,WORLD_W		SNA
#N/A	JC97-02181A	MEA ETC-BLADE CLEANING;ML-1610,SEC,SEC,B		SNA
#N/A	JC97-02182A	MEA ETC-SUS BLADE;ML-1610,SEC,SEC,SUS BL		SNA
#N/A	JC97-01900B	MEA UNIT-AGITATOR_B;ML-1610,SEC,SKYLARK,		SNA
#N/A	JC97-02183A	MEA UNIT-FRAME INT;ML-1610,SEC,-,ASSY-FR		SNA
#N/A	JC97-02153A	MEA UNIT-OPC;ML-1610,SEC,-,DRUM24,EARTH,		SNA
#N/A	JC97-02154A	MEA UNIT-PLATE_L;ML-1610,SEC,-,ASSY-PLAT		SNA
#N/A	JC97-02155A	MEA UNIT-PLATE_R;ML-1610,SEC,-,ASSY-PLAT		SNA
#N/A	JC97-02152A	MEA UNIT-WTB;ML-1610,SEC,-,ASSY-WTB,-,-,		SNA
#N/A	JC75-00044A	MEC-BUSHING AGI L;SF-5100,SEC,POM+SANTOP		SNA
#N/A	JC75-00043A	MEC-GEAR OPC R;SF-5100,SEC,-,-,BLK,-,-,-		SNA
#N/A	JC71-00009A	NPM-BUSHING DEV R;ML-6060,BRONZE,D7*12,-		SNA
#N/A	JC71-00002A	NPR-EARTH OPC APOLLO;SF-5100,C5210P-H,0.		SNA
#N/A	JC99-01861B	PAA WOOD-LABEL(SEE);ML-1610,SEE,-,LABEL		SNA
#N/A	JC99-01862A	PAA-PACKING(SKYLARK);ML-1610,XAA,-,PACKI		SNA
#N/A	JC69-00846A	PAD-FRICTION;ML-1610,NBB,1.5,39,-,GRAY,0		SA
#N/A	JC41-00294A	PCB-MAIN;ML-2010,FR-4,2L,V0.1,1.6T,122.7		SNA
#N/A	JC61-01167A	PLATE-M-DEVE_L;ML-1610,PC,2,62.4,88,BLK,		SNA
#N/A	JC61-01168A	PLATE-M-DEVE_R;ML-1610,ABS,2,62.4,87.7,B		SNA
#N/A	JC72-01329A	PMO-AGITATOR_DOUBLE;ML-6060,ABS+GF20%,BL		SNA
#N/A	JC72-00081A	PMO-BUSHING AGI L;SF-5100,POM,BLK,-,-,-,		SNA
#N/A	JC72-41105A	PMO-BUSHING DEV;ML-5000,POM,NTR,-,-,-,-,		SNA
#N/A	JC72-40332A	PMO-BUSHING_CHARGE;ML-80,POM,BLK,HB,-		SNA
#N/A	JC72-40232A	PMO-CAP AGITATOR;ML-80,PP,BLK,-,-		SA
#N/A	JC72-00083A	PMO-HOLDER CR;SF-5100,POM,BLK,-,-,-,-,-,		SNA
#N/A	JC72-01317A	PPR-FILM AGITATOR SUB;ML-2550,PET SHEET		SNA
#N/A	JC72-10924A	PPR-FILM AGITATOR;ML-5000,PET T0.1,NTR,-		SA
#N/A	JC72-01350A	PPR-FILM OPC;ML-1610,URETHANE SHEET,NTR,		SNA
#N/A	JC72-10925A	PPR-FILM SUPPORT AGI;ML-5000,PET T0.3,NT		SNA
#N/A	JC72-01349A	PPR-SPACER SR_L;ML-1610,PET OR PC,NTR,T0		SNA
#N/A	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000116	R-CHIP;120ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-007521	R-CHIP;14.7Kohm,1%,1/10W,TP,1608		SA
#N/A	2007-008567	R-CHIP;15.4Kohm,1%,1/10W,TP,1608		SNA
#N/A	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000096	R-CHIP;30Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000083	R-CHIP;3Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000107	R-CHIP;470Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000965	R-CHIP;5.1Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-001002	R-CHIP;510ohm,5%,1/10W,TP,1608		SA
#N/A	2007-001044	R-CHIP;56ohm,5%,1/10W,TP,1608		SNA
#N/A	2007-001139	R-CHIP;7.5Kohm,1%,1/10W,TP,1608		SA
#N/A	2011-001334	RC-NETWORK;1K/5.1K/39ohm,10%,150pF,-,6V,		SNA
#N/A	JC73-00201A	REX-BLADE CLEANING;ML-1610,POLYURETHANE		SNA
#N/A	JC73-40906A	RMO-SEAL AGITATOR;ML-5000,SANTOPRENE,-,-		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer #	SEC Code	Description & Specification	Location	Service
#N/A	2011-001011	R-NET;10Kohm,5%,1/16W,L,CHIP,8P,TP,3.2x1		SNA
#N/A	2011-001094	R-NET;39OHM,5%,1/16W,L,CHIP,8P,TP		SA
#N/A	JC66-00828A	ROLLER-CHARGE;ML-1610,NBR+ECO,D12,L230,N		SNA
#N/A	JC66-00851A	ROLLER-DEVE;ML-1610,CONDUCTIVE NBR,D14.0		SNA
#N/A	JC66-00830A	ROLLER-M-EXIT FR;ML-1610,TEFLON,6.5,L22		SNA
#N/A	JC66-00825A	ROLLER-SUPPLY;ML-1610,SILICON FOAM,D11.5		SNA
#N/A	JC73-10017A	RPR-SEAL_BLOCK;ML-80,POLYURETHANE FOAM,T		SNA
#N/A	2005-000168	R-WIRE WOUND,NON;0.22ohm,5%,2W,AA,BK,4x1		SA
#N/A	JC46-00290A	S/W APPLICATION-CD;-;ML-2010P,PRT DRV,1		SNA
#N/A	6001-000568	SCREW-MACHINE;PH,+,M3,L8,NI PLT,SWRCH18A		SA
#N/A	6002-000440	SCREW-TAPPING;PWH,+,2,M3,L8,ZPC(BLK),S		SA
#N/A	6003-000282	SCREW-TAPTITE;BH,+,B,M3,L8,ZPC(BLK),SW	Z4169	SA
#N/A	6003-000269	SCREW-TAPTITE;BH,+,S,M3,L6,ZPC(YEL),SW	Z4170	SA
#N/A	6003-000261	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(YEL),SWRC		SNA
#N/A	6003-000301	SCREW-TAPTITE;BH,+,S,M4,L6,ZPC(YEL),SWRC		SNA
#N/A	6003-000196	SCREW-TAPTITE;PWH,+,B,M3,L10,NI PLT,SWRC	Z4198	SA
#N/A	JC62-00156A	SEAL-BOSS_R;ML-1610,CR,BLACK,T5,-,D7.5,-		SNA
#N/A	JC62-00153A	SEAL-BRKT CLEANING;ML-1610,POLYURETHANE		SNA
#N/A	JC62-00149A	SEAL-CAP DEVE;ML-1610,POLYURETHANE FOAM,		SNA
#N/A	JC62-00148A	SEAL-CAP SIDE;ML-1610,POLYURETHANE FOAM,		SNA
#N/A	JC62-00151A	SEAL-DEVE L;ML-1610,PTFE FELT+MICRO URET		SNA
#N/A	JC62-00165A	SEAL-FILM REAR;ML-1610,PET,-,T0.075,9,22		SNA
#N/A	JC62-00154A	SEAL-OPC CLEAN_L;ML-1610,PTFE FELT+URETH		SNA
#N/A	JC62-00155A	SEAL-OPC CLEAN_R;ML-1610,PTFE FELT+URETH		SNA
#N/A	JC62-00145A	SEAL-SUPPLY;ML-1610,CHLOROPRENE RUBBER		SNA
#N/A	JC62-00146A	SEAL-SUPPORT L;ML-1610,MICRO URETHANE,-,		SNA
#N/A	JC62-00147A	SEAL-SUPPORT R;ML-1610,MICRO POLYURETHAN		SNA
#N/A	JC62-00150A	SEAL-SUS BLADE;ML-1610,POLYURETHANE FOAM		SNA
#N/A	JC66-00827A	SHAFT-RDCN;ML-1610,SUS303,L24,D3,NTR,-,-		SNA
#N/A	JC63-00873A	SHEET-PATH;ML-1610,PET,T0.188,8.6,16,BLA		SNA
#N/A	0202-001215	SOLDER-BAR;HSE-16,S60S-20,D3,SN/0.5CU/0.		SNA
#N/A	0202-001459	SOLDER-CREAM;S3X58-M405,-,D20~38\$,96.5SS		SNA
#N/A	0202-001492	SOLDER-WIRE FLUX;HSE-02 LFM48 SR-34 S,-,		SNA
#N/A	0202-001240	SOLDER-WIRE;HSE-01,-,D3,SN/0.5CU/0.03NI/		SNA
#N/A	JC72-01371A	SPONGE-COVER TOP;ML-2010,POLYURETHANE FO		SNA
#N/A	JC61-00049A	SPRING ETC-TR(KOR);ML-4500,SUS304-WPB,0.		SNA
#N/A	JC61-00060A	SPRING ETC-TS BLADE;ML-6060,SUS304 WPB,0		SNA
#N/A	6103-000117	SUPPORTER;DACN-6N,L10,NTR,NYLON66		SNA
#N/A	0203-001189	TAPE-ACETATE;#810,T0.05,W12,L65000,TRP,-		SNA
#N/A	0203-000007	TAPE-FILAMENT;3M,T0.15,W18,L55M,TRP		SNA
#N/A	0203-001100	TAPE-OPP MASKING;OPP/W75/CLR,T0.05,W75,L		SNA
#N/A	0204-000469	THINNER;#4662,-,0.795,-		SNA
#N/A	JC02-00043A	TONER-GRINDED;ML-1610,TUFTONE YS-4,-,8.8		SNA
#N/A	JC63-00629A	TRAY-M-EXTENSION SMALL;ML-1610,HIPS,-,2		SNA
#N/A	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-		SA
#N/A	0501-000457	TR-SMALL SIGNAL;MMBT2222A,NPN,350mW,SOT-		SA