

8. Exploded Views and Parts List

Contents

8.1 Main	8-2
8.2 Top Cover	8-3
8.3 Rear Cover	8-4
8.4 Front Cover	8-5
8.5 Main Driver	8-6
8.6 Main Frame	8-9
8.7 LSU Cover	8-10
8.8 Fuser Unit	8-11
8.9 ELA-UNIT OPC DEV	8-12
8.10 ITB Unit	8-13
8.11 Casstte Unit	8-14

Way to observe Part Code & Description

Part code and Description is quoted and controlled by determined standard. Refer to this determined standard, it will help with ordering Part.

- There are two kinds of Part code inscription type.

●●●●●●●●●●	ex) 2007-007961	R-CHIP
■ ■ ● ● ● ● ● ■	ex) JB96-01268A	ELA UNIT-COVER TOP

It shows part specific

(● : figure, ■ : character (alphabet))

Type 1 : Controlled by Company : It can be commonly used for all kinds of product SEC produce. Mostly, electronics Parts.

Type 2 : Controlled by Division : It is used or one produce. Mostly, Mostly, mechanical Parts.


- **A/S privately used part** : It is only used for A/S .

- **Ass'y part** : Assembled by more than 2 Parts. If necessary part is not A/S Part, Ass'y part including necessary par can be used. It is shown in the diagram and drawing of SVC manual.


- Ass'y part and A/S privately used Part is distinguished by part Code and Description. The are inscription type 2. It is recognized by Part character and front side of description.

DIVISION	PART CODE	DESCRIPTION
A/S Private	**81-***** (JB81-00039A)	AS-***** (AS-USE)
ASS'Y Part	**75-***** (JB75-00068A)	MEC-***** (MEC-CHUTE)
ASS'Y Part	**92-***** (JB92-01131A)	PBA ***** (PBA MAIN-CONTROLLER)
ASS'Y Part	**97-***** (JB97-01089A)	MEA ***** (MEA UNIT-PULLEY IDLE)


8.1 Main

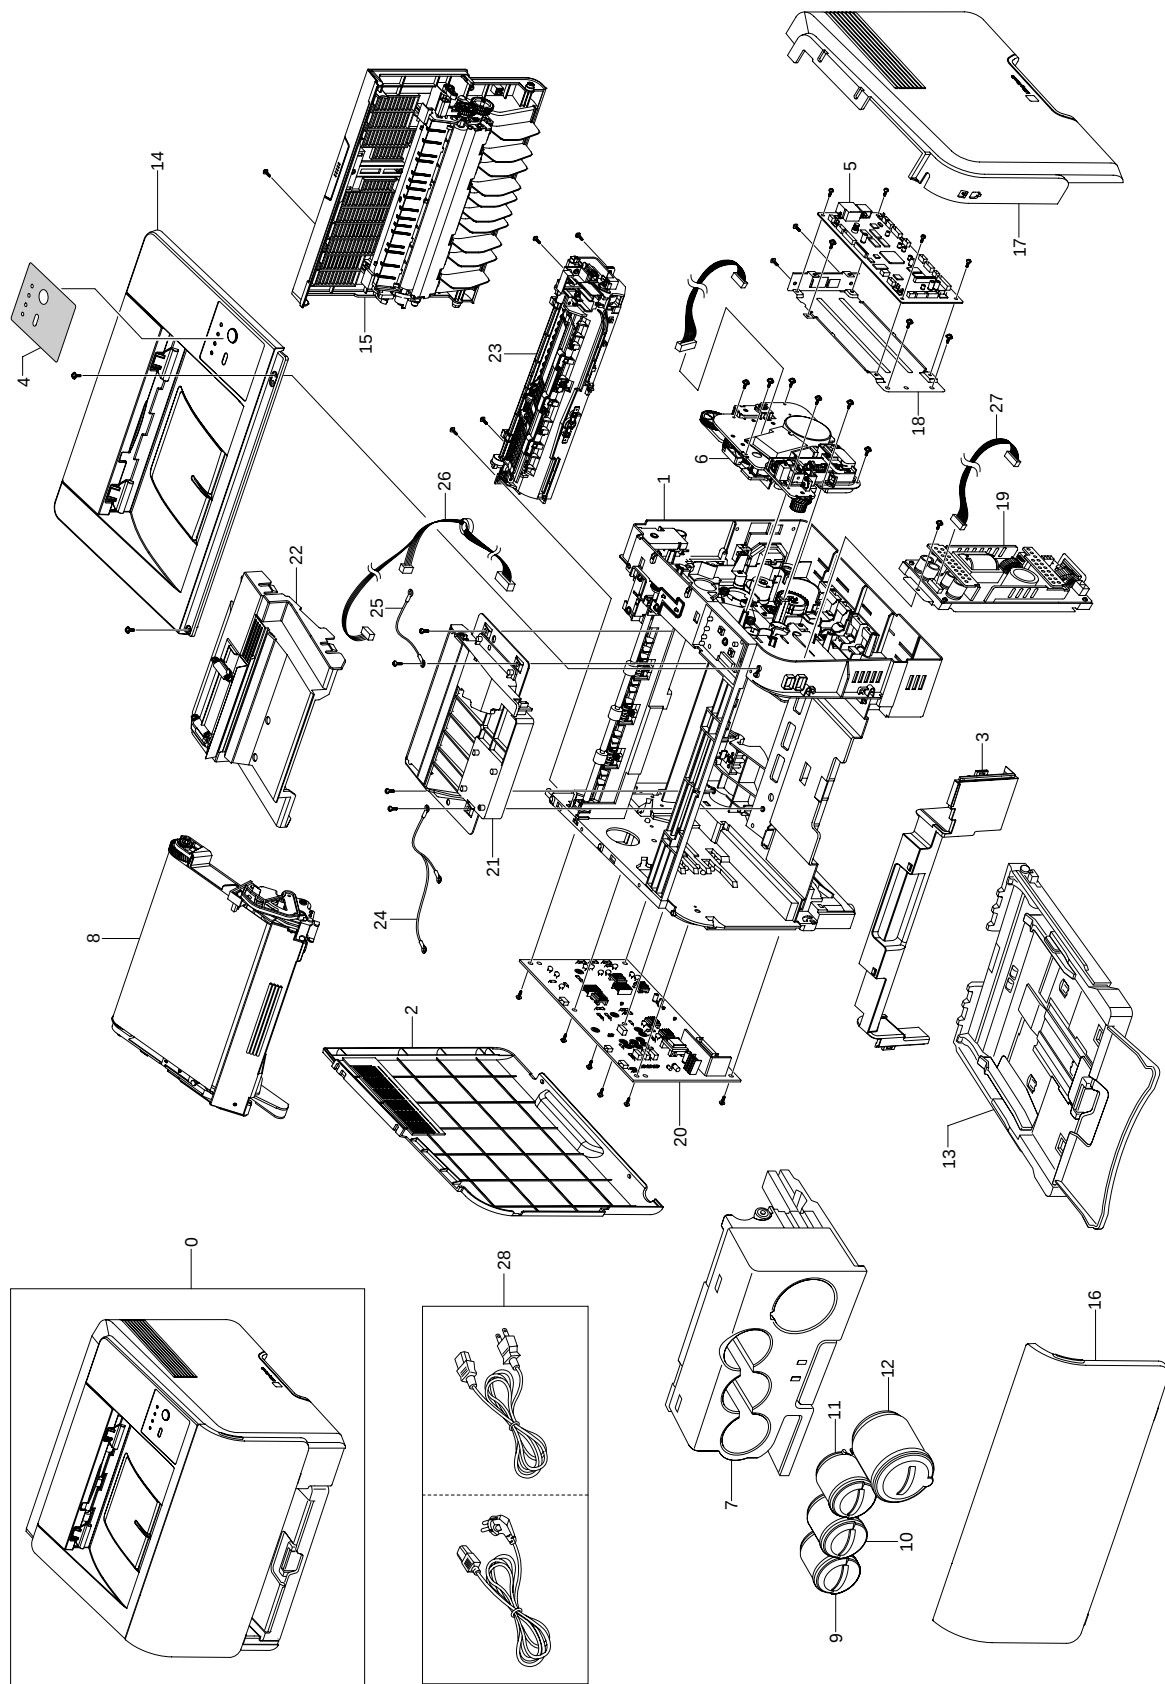


8.2 Top Cover

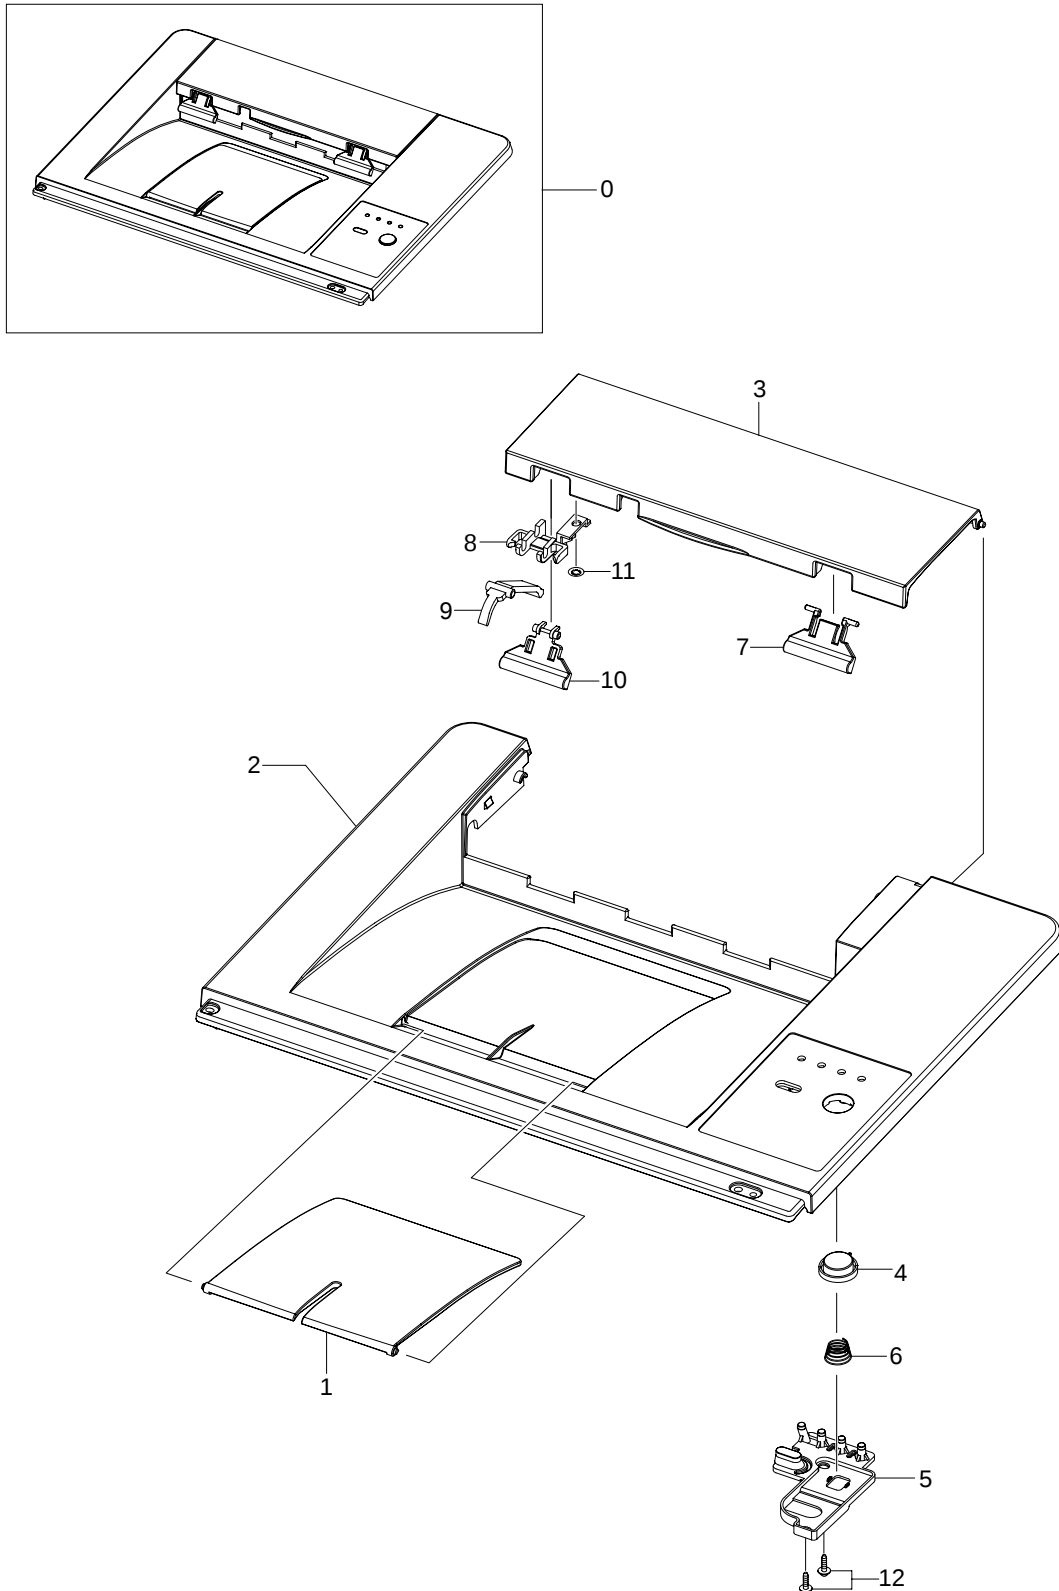


8.3 Rear Cover

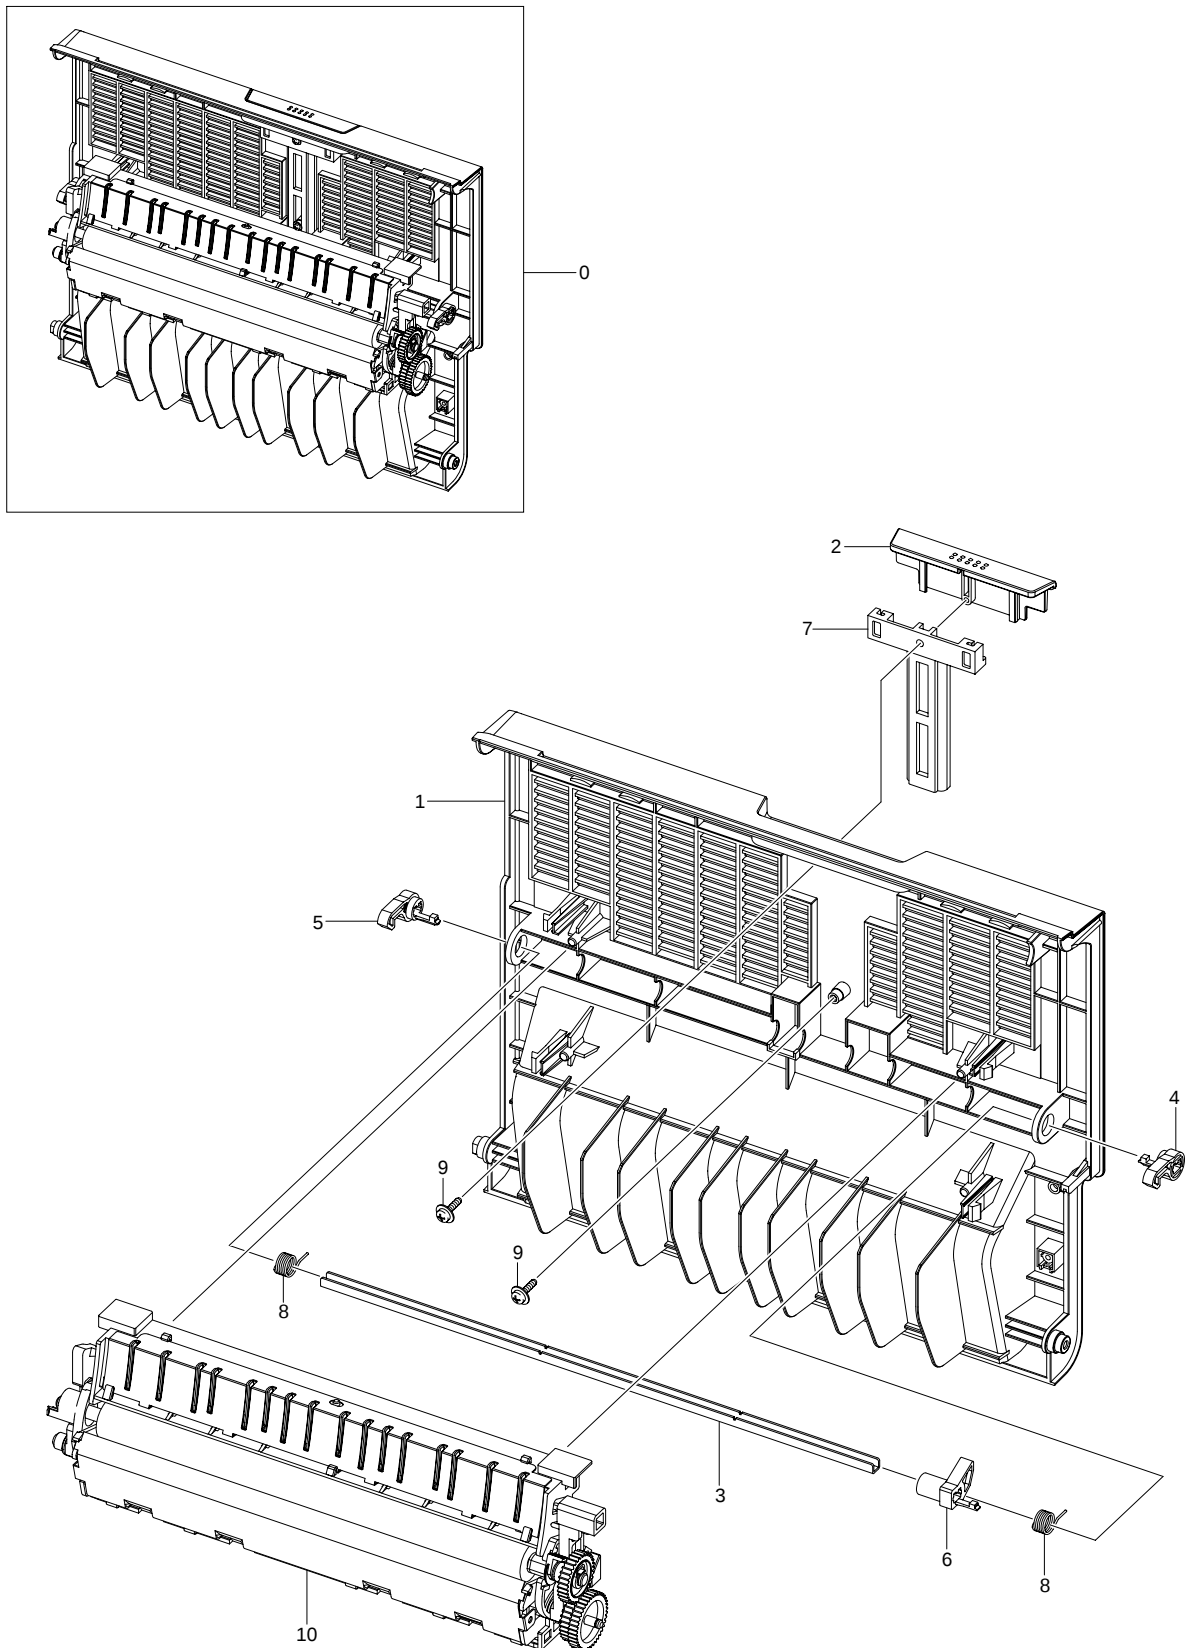


8.4 Front Cover

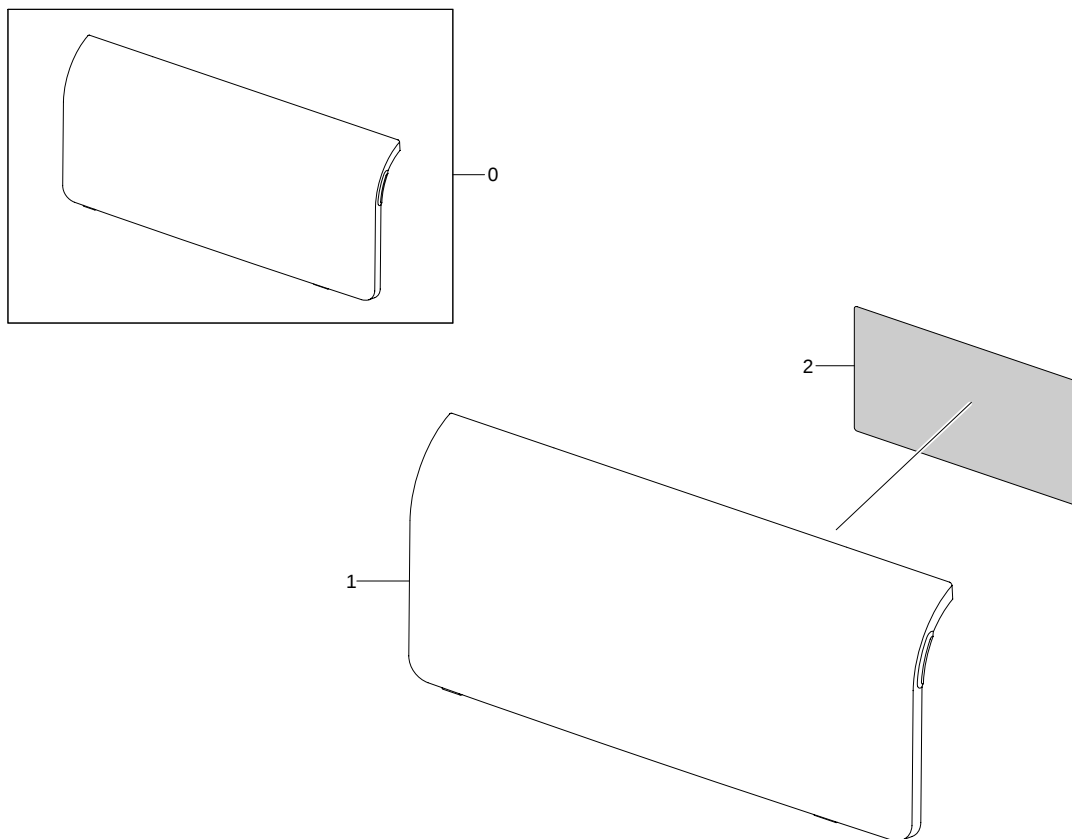


8.5 Main Driver(1)

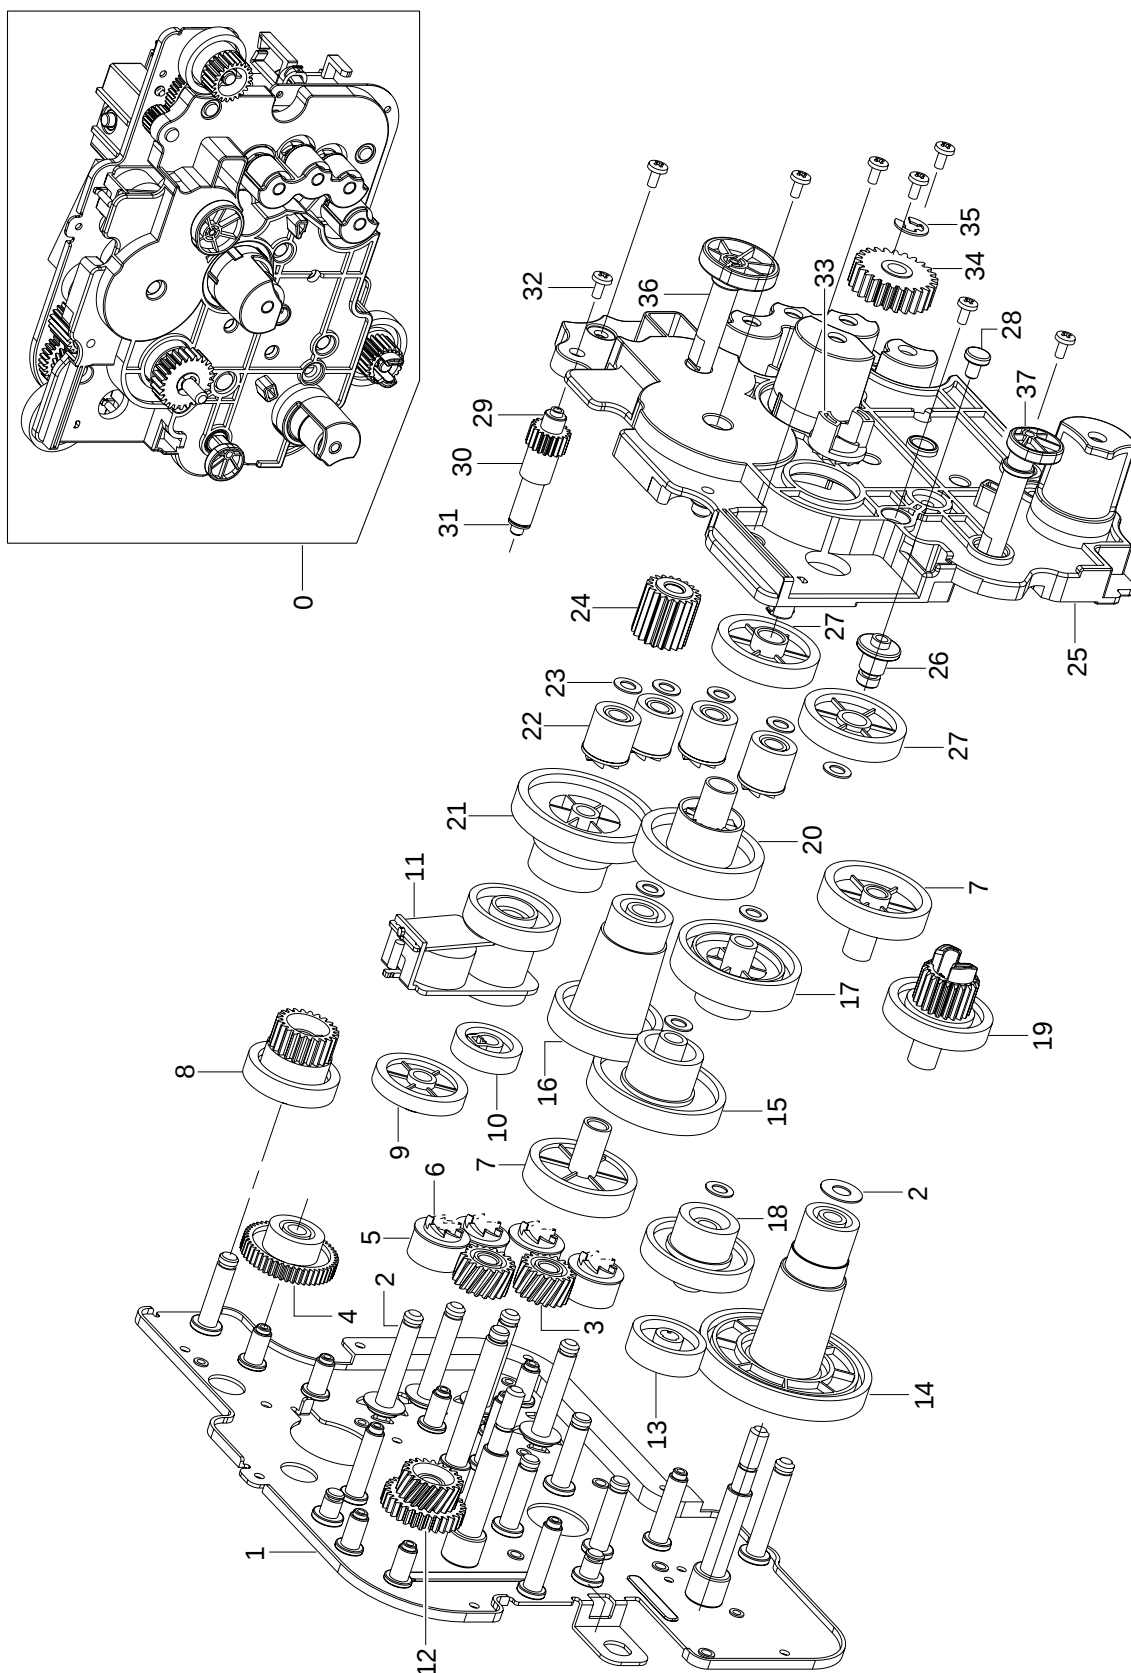


Main Driver(2)

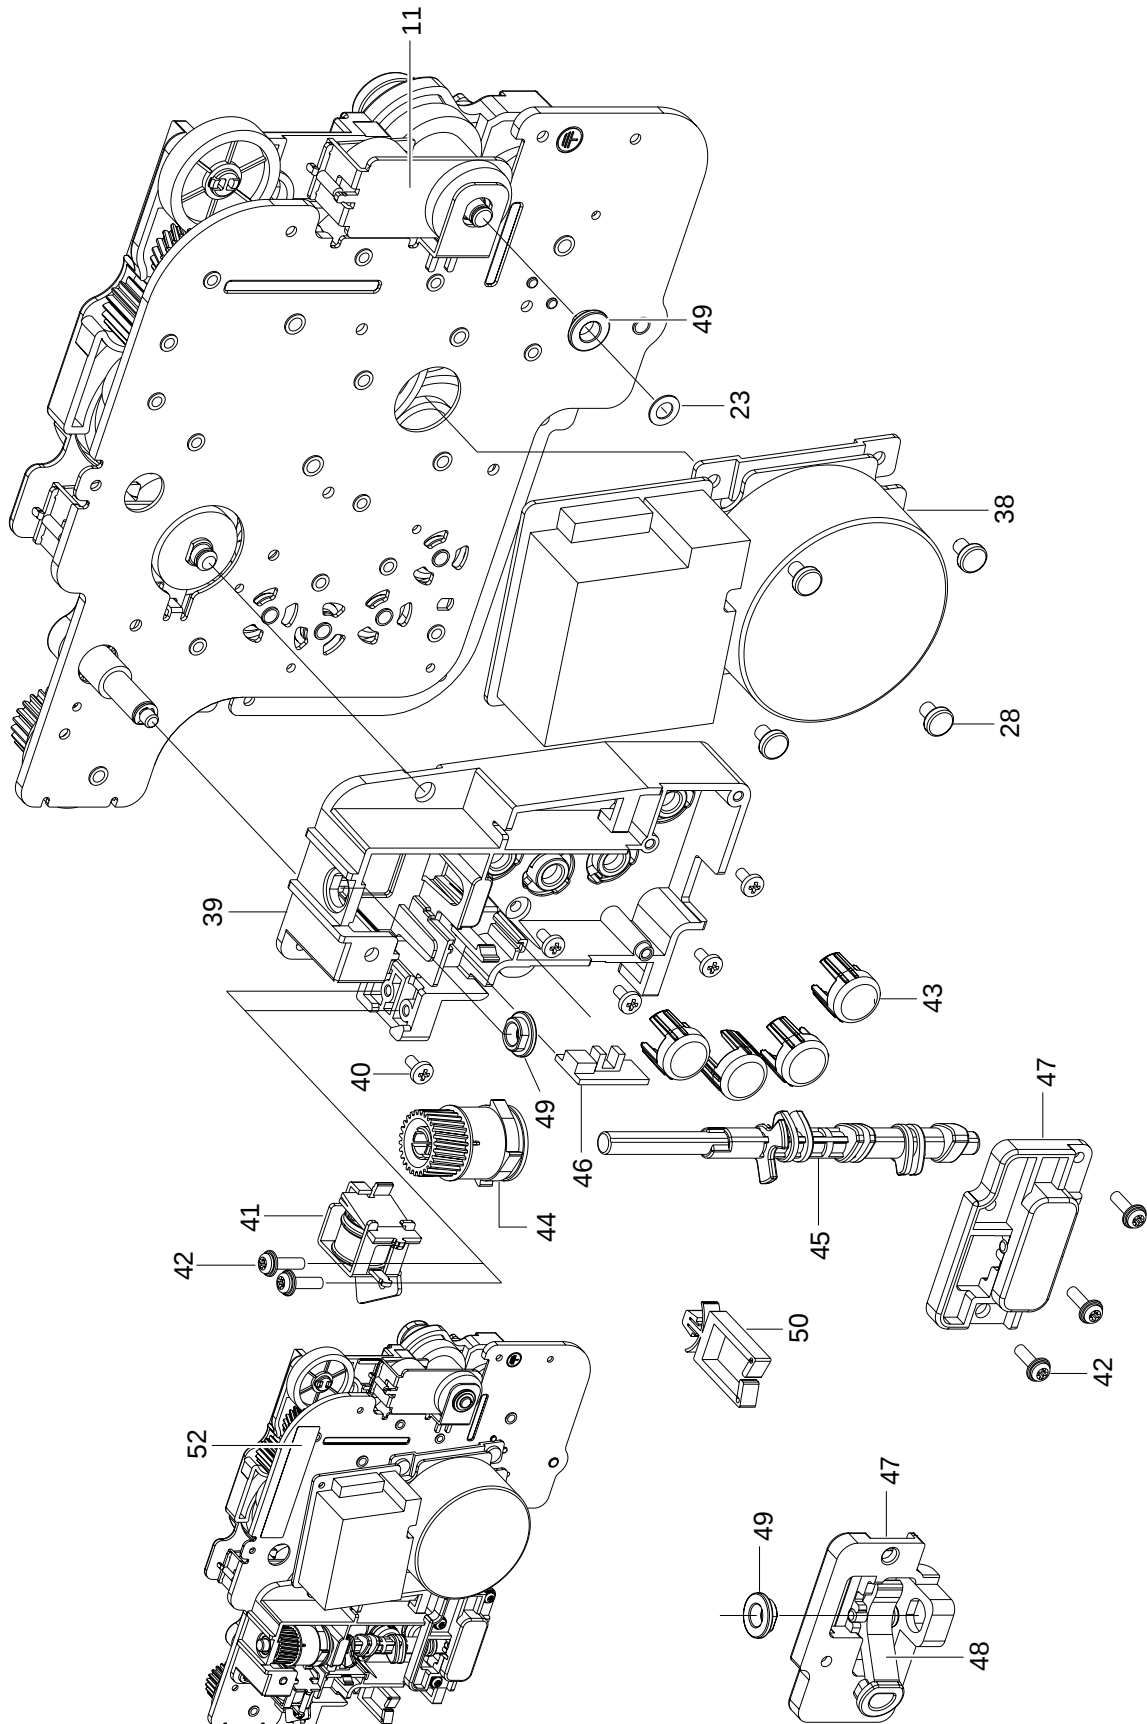


8.6 Main Frame(1)

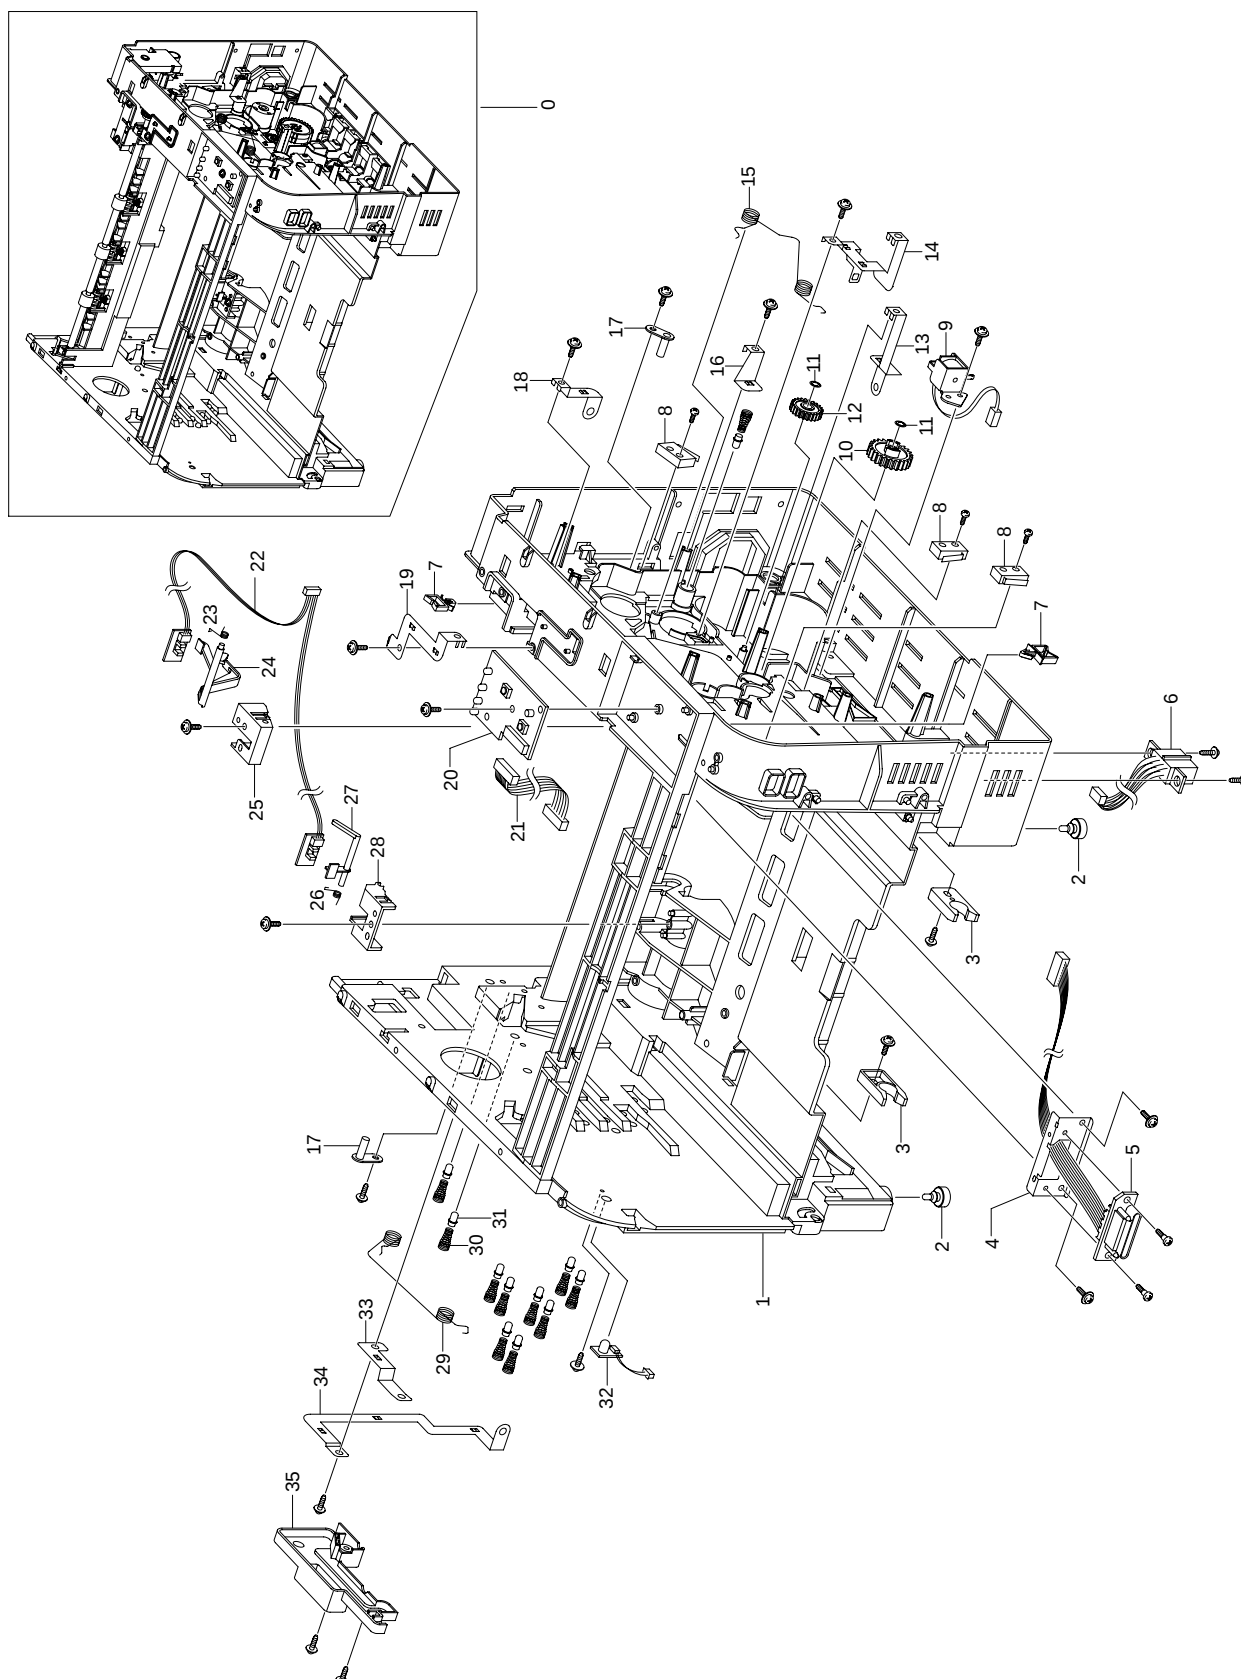


Main Frame(2)

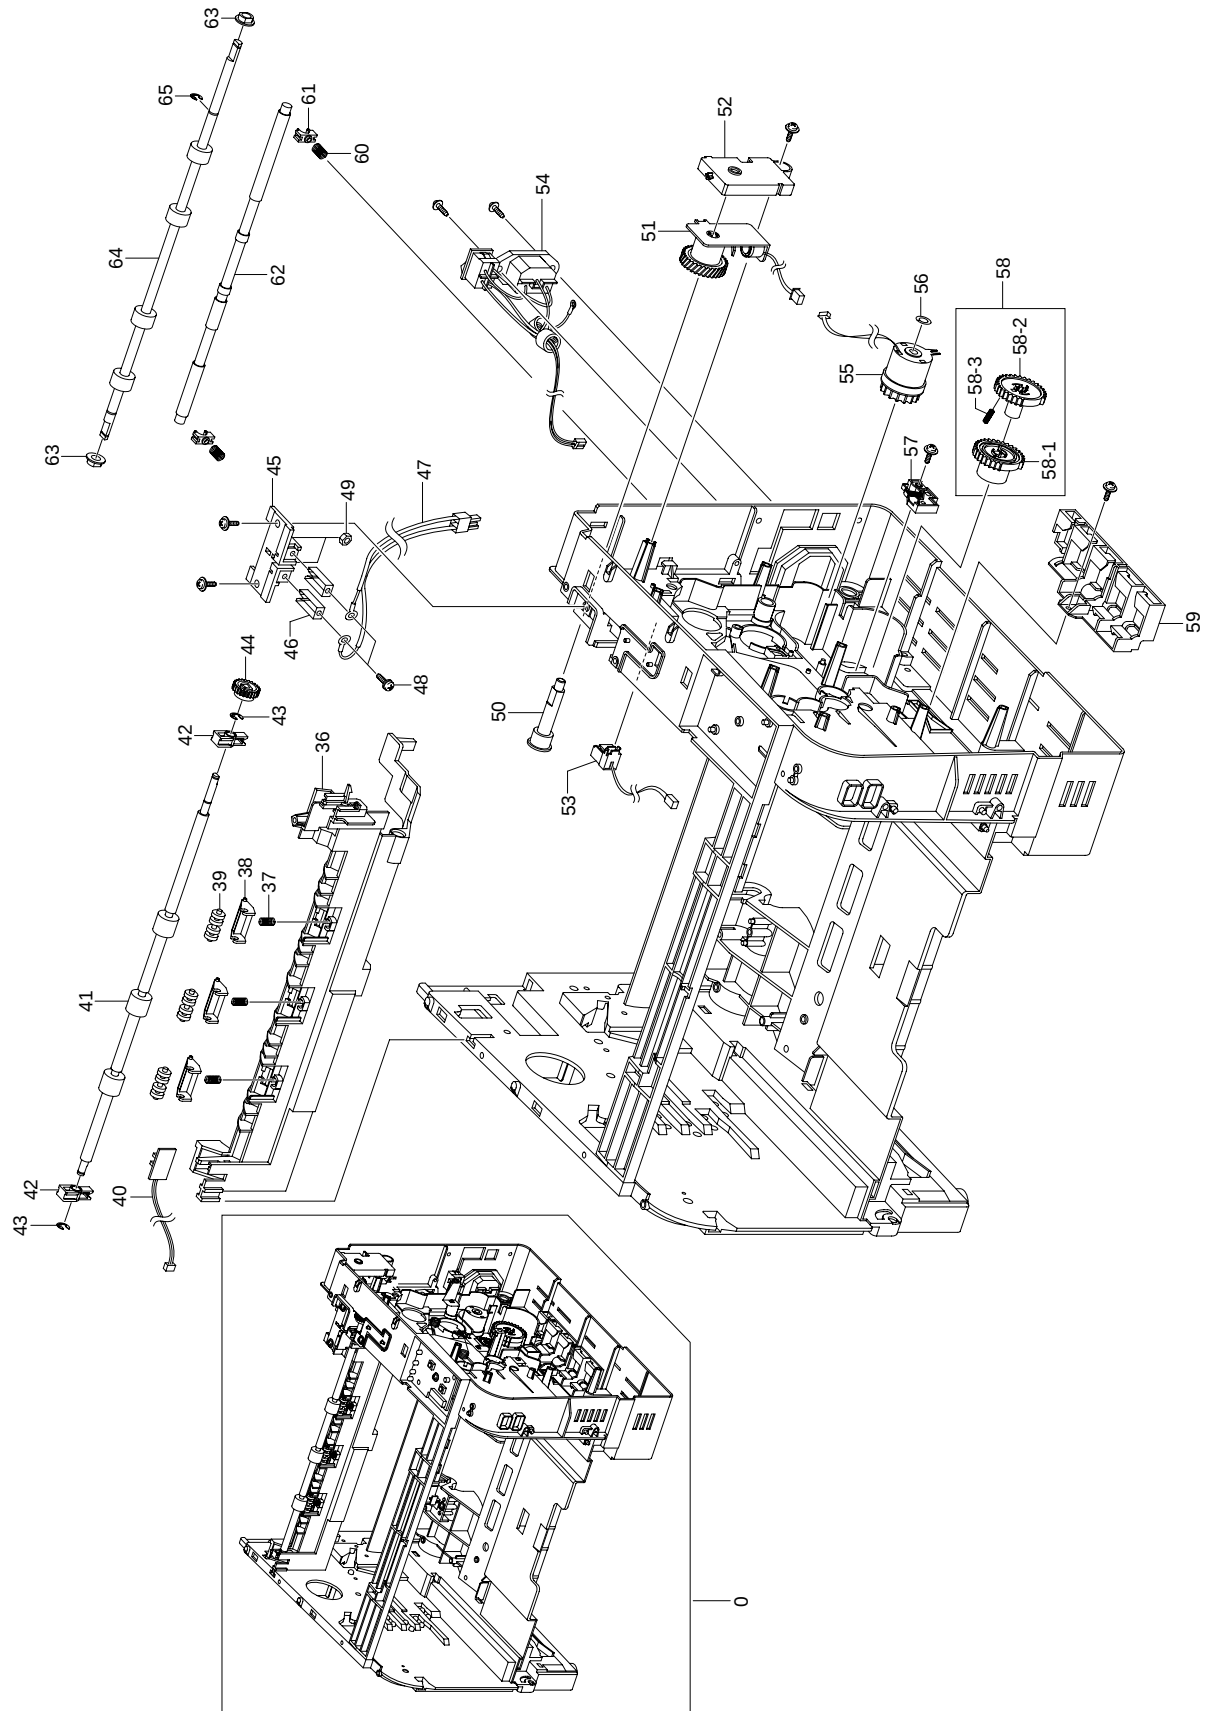


8.7 LSU Cover

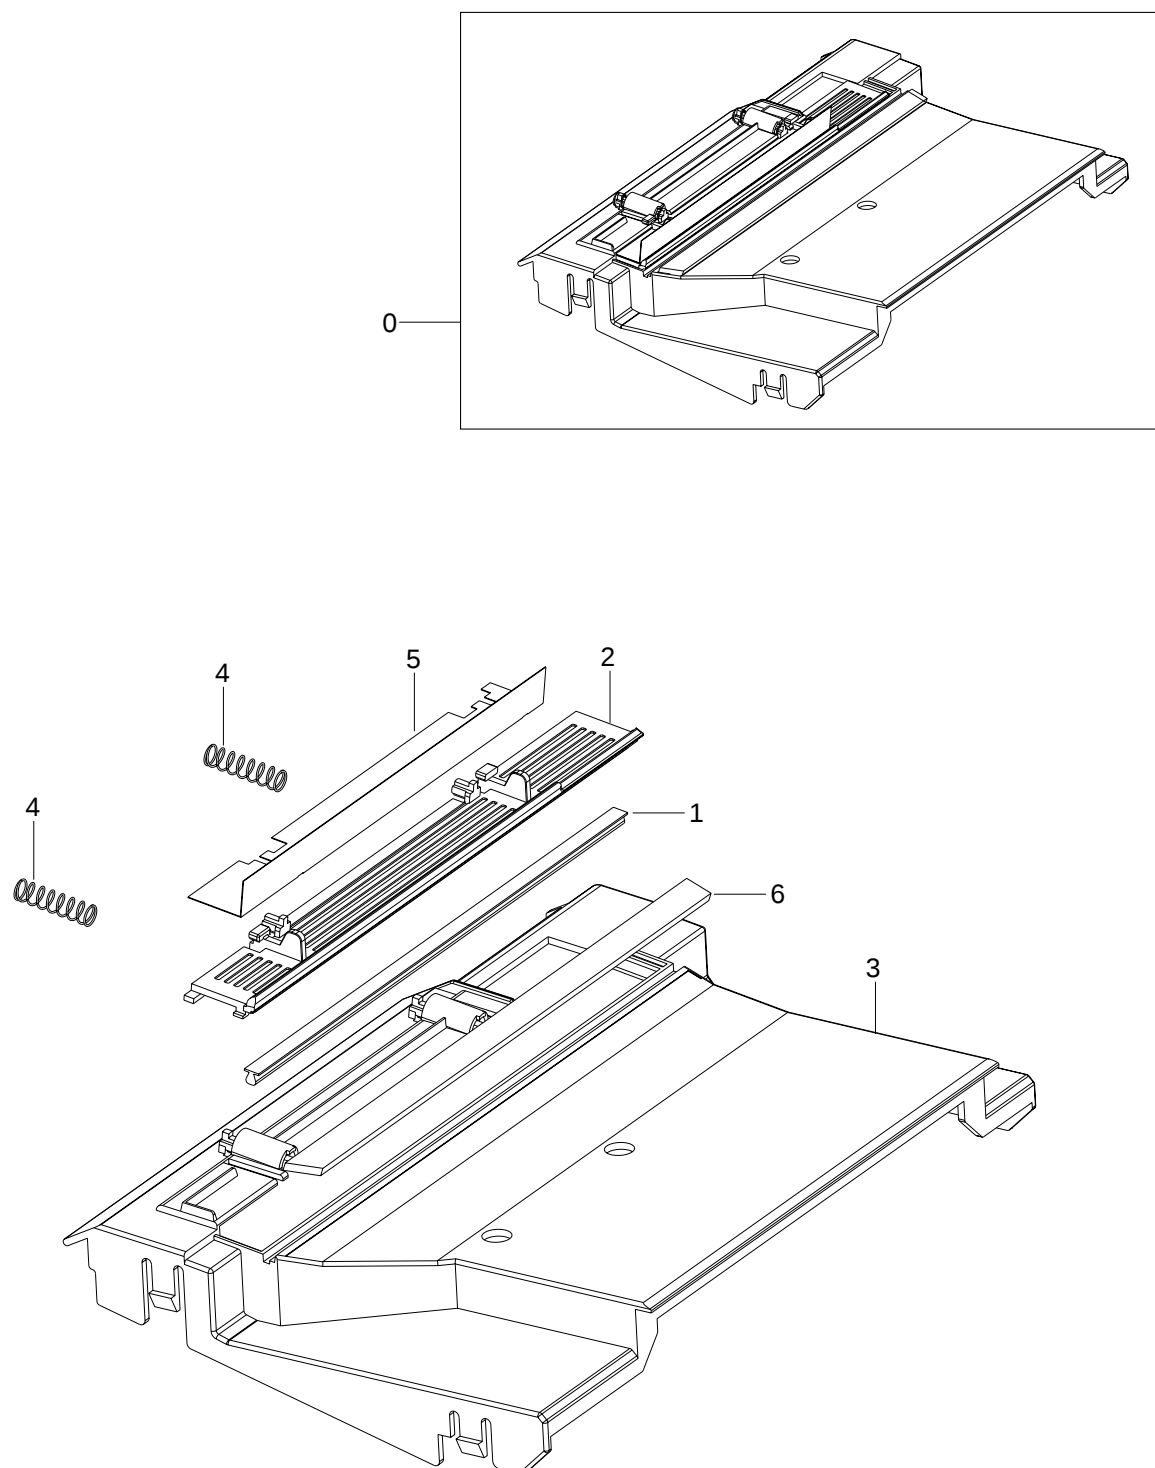


8.8 Fuser Unit

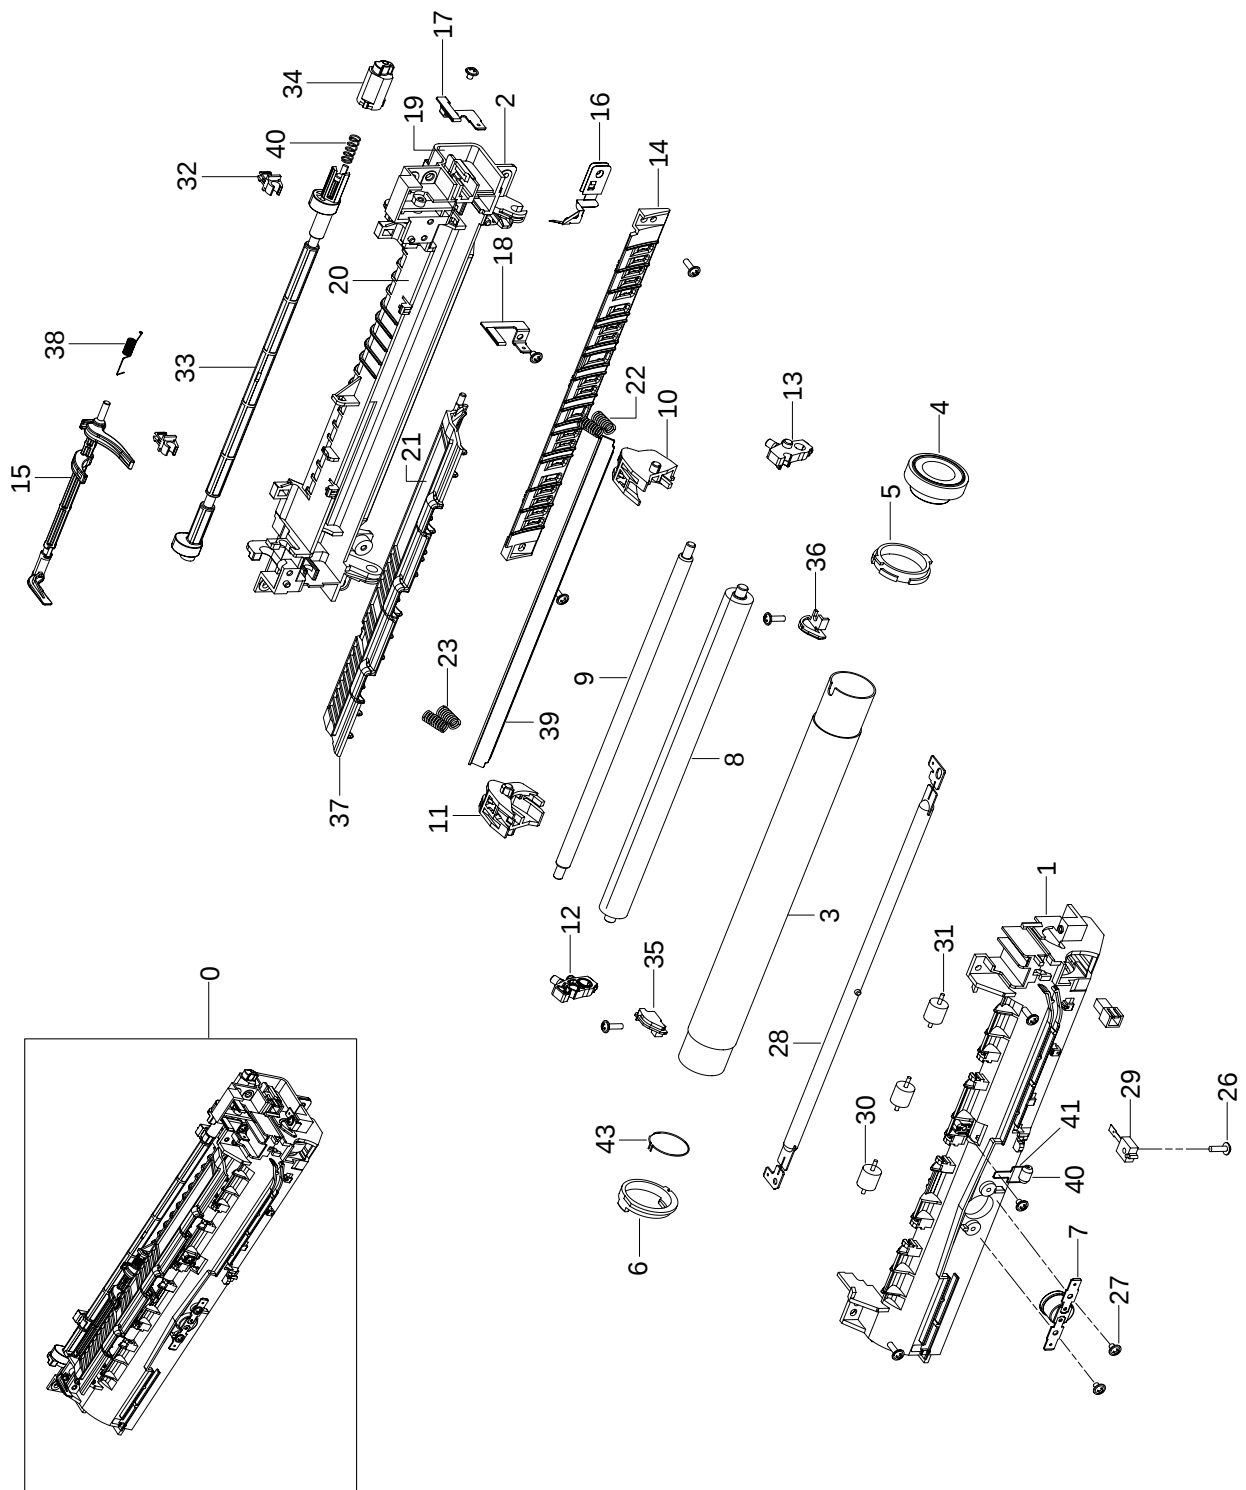


8.9 ELA-UNIT OPC DEV

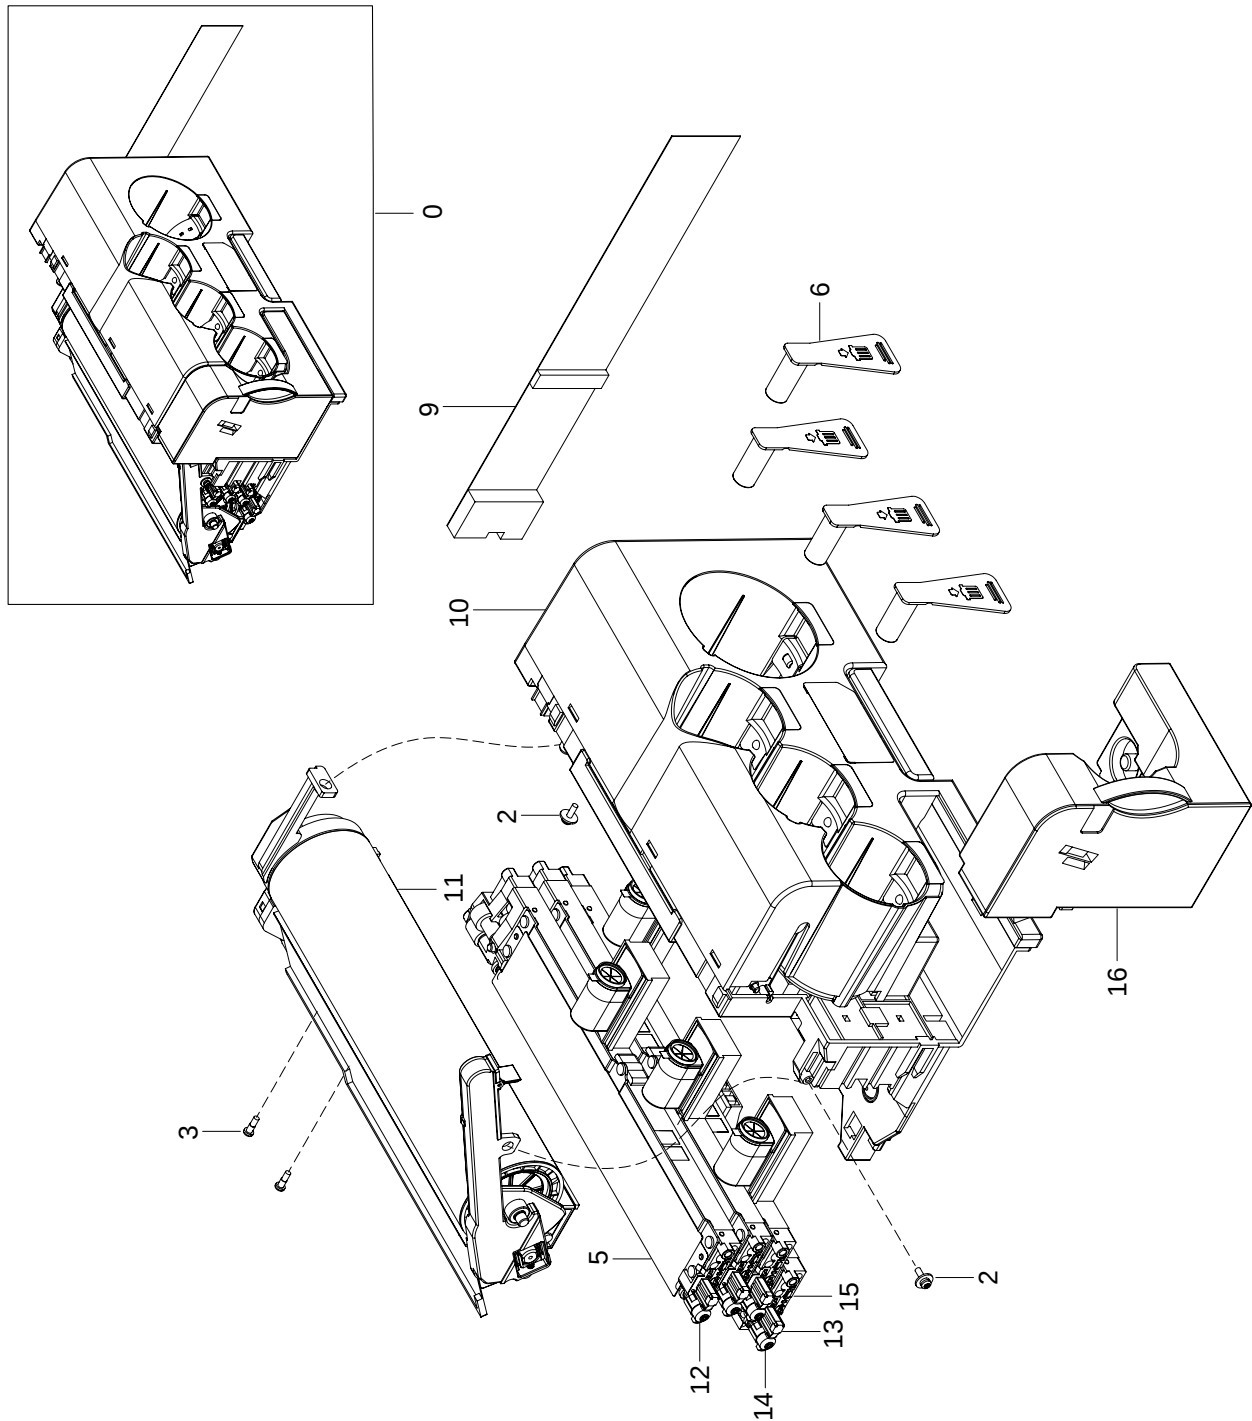

8.10 ITB Unit

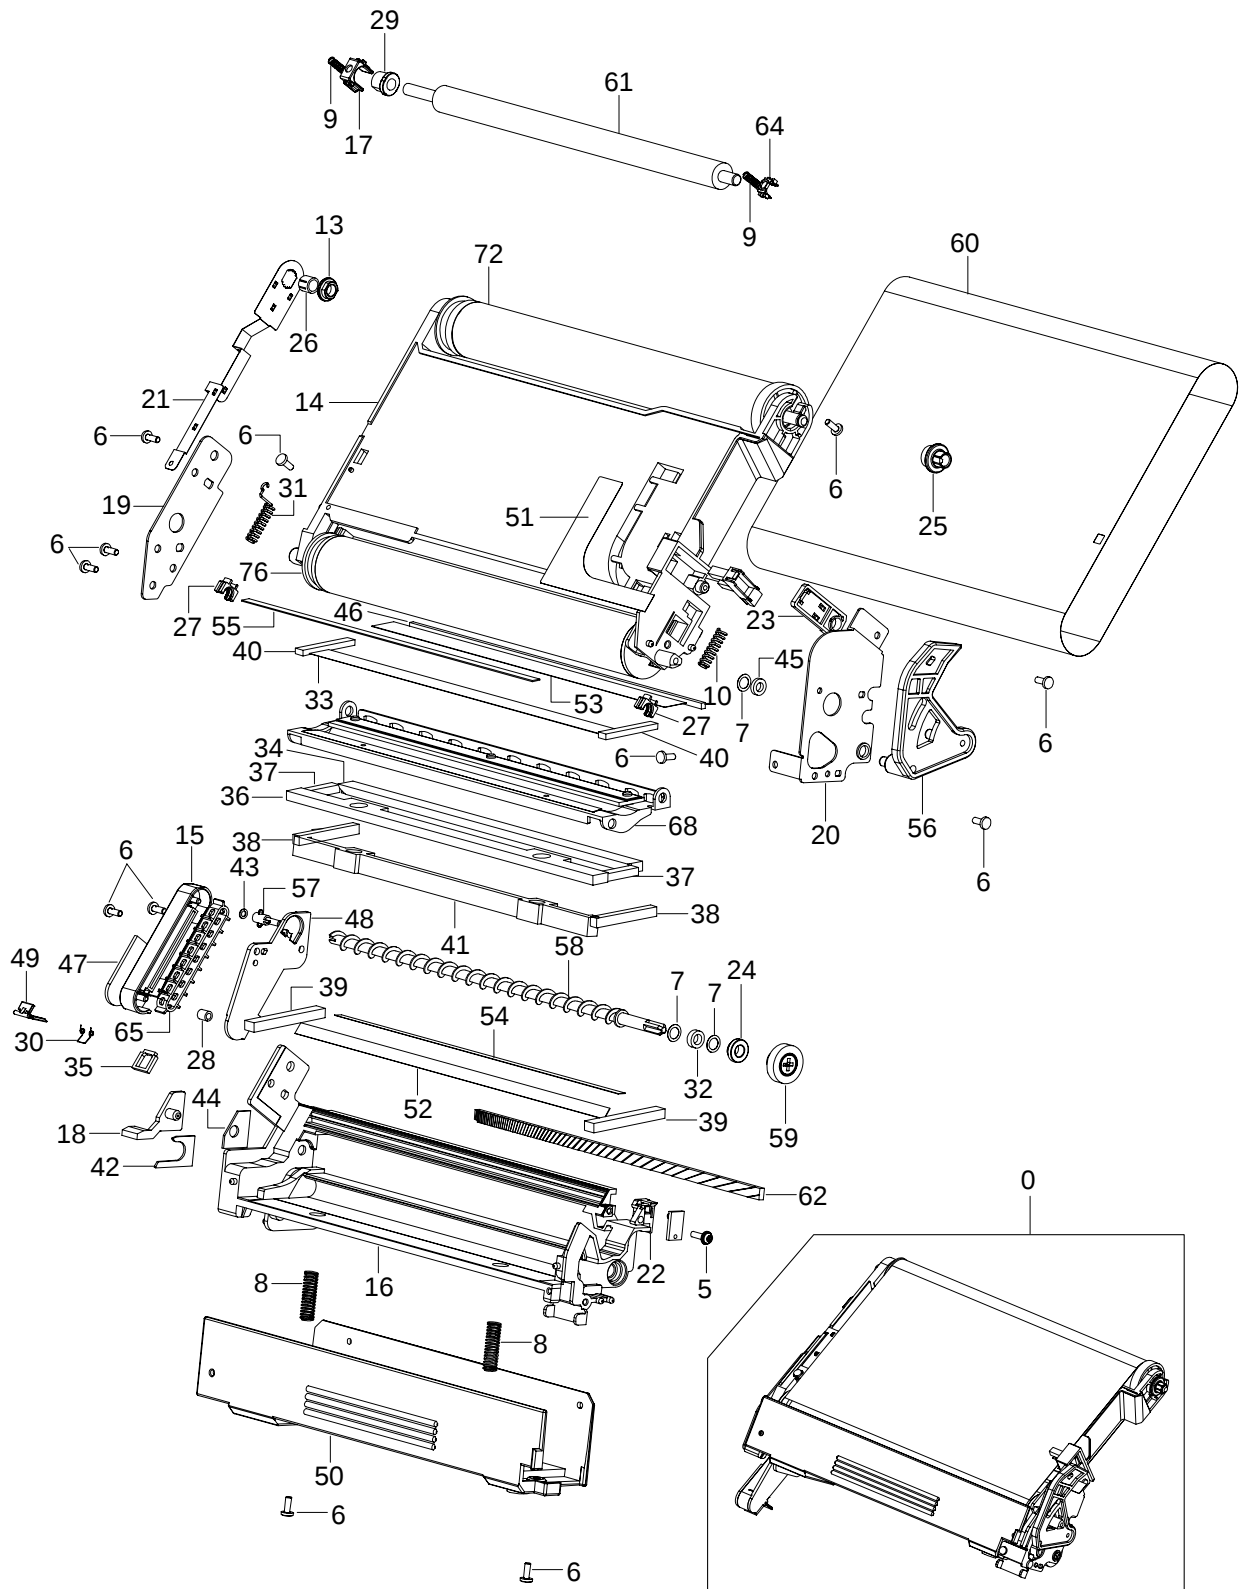

8.11 Casstte Unit

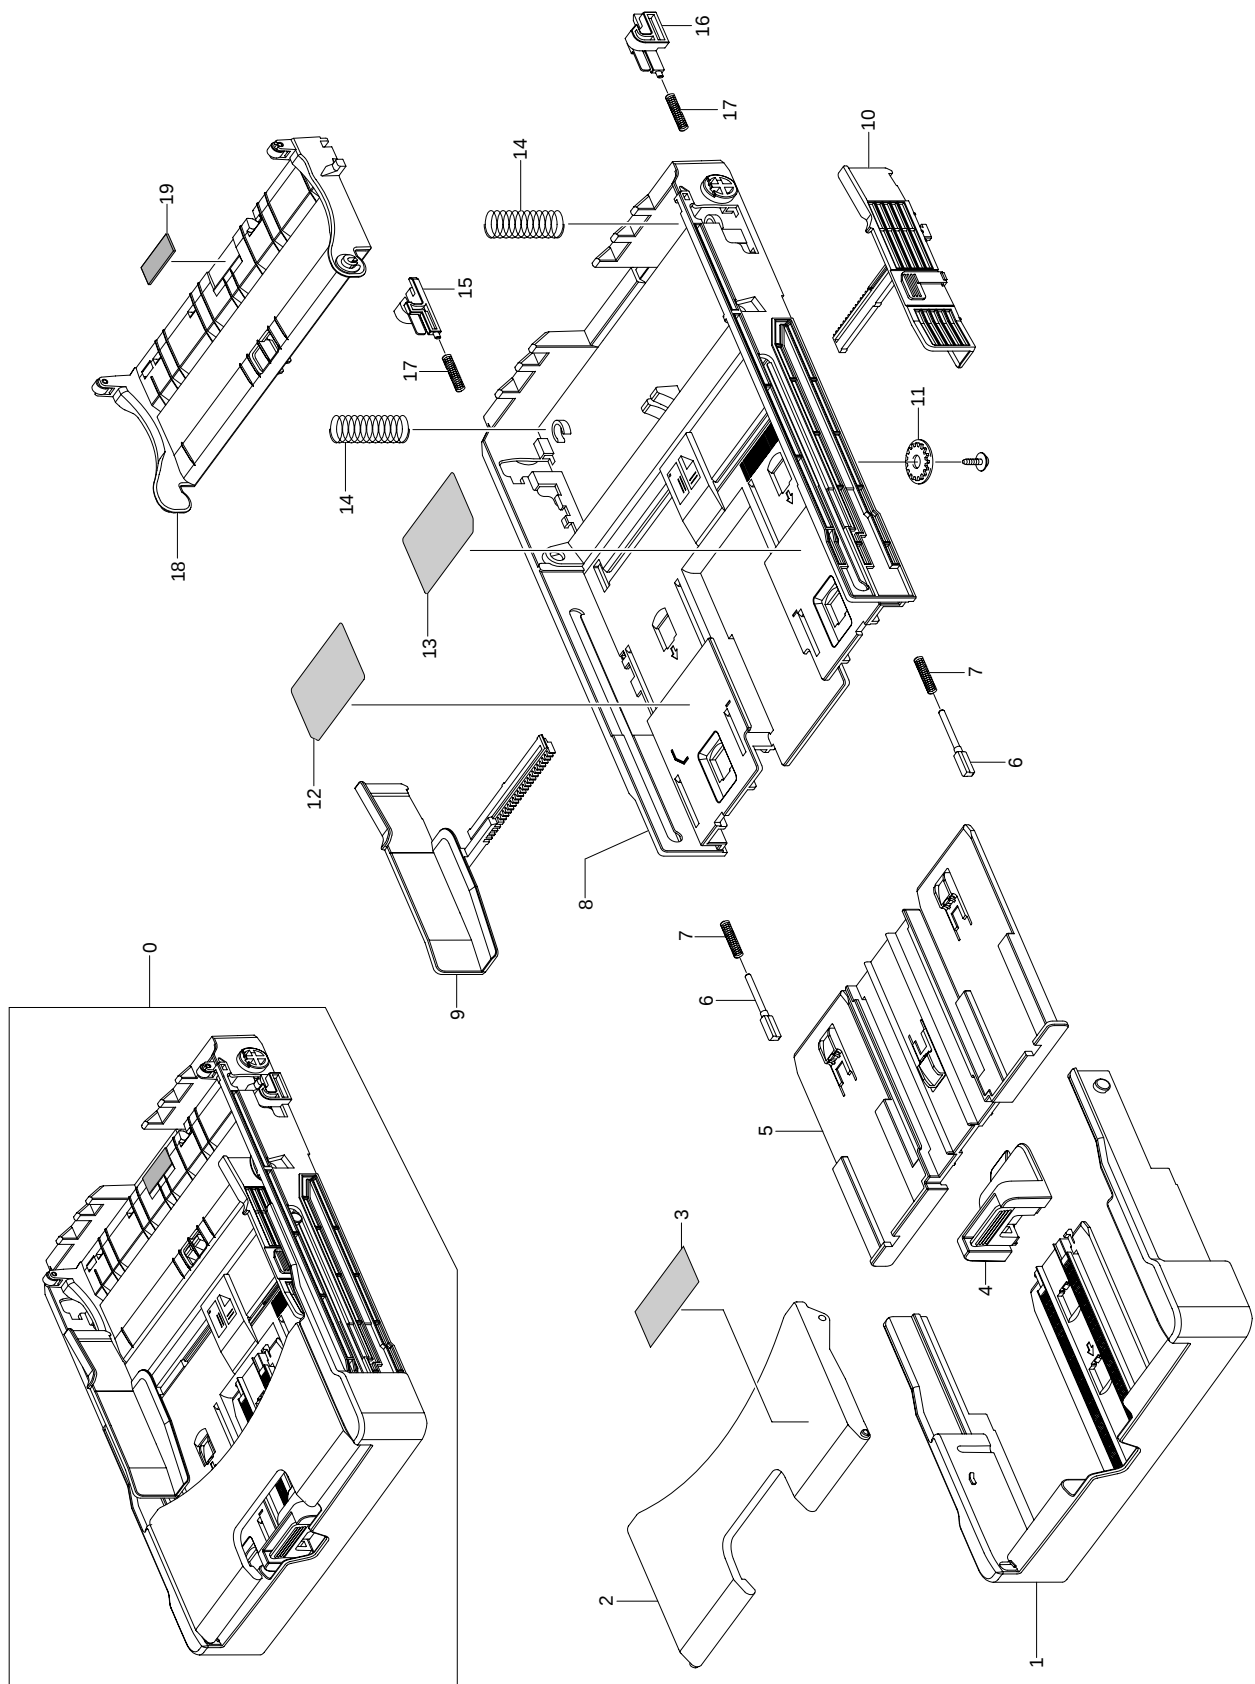

Service Parts List (Model code : CLP-300/SEE)

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
8.1-1	JC97-02330A	MEA UNIT-FRAME;CLP-300,SEC,WORLD,-,-,-		SA
8.1-2	JC63-00842A	COVER-M-LEFT SIDE;CLP-300,ABS FR,T2.5,23		SA
8.1-3	JC63-00847A	COVER-M-DUMMY FRONT;CLP-300,ABS FR,T2.5,		SA
8.1-4	JC63-01102B	SHEET-COVER TOP;CLP-300,PC SHEET,T0.5,W7		SA
8.1-6	JC96-03608A	ELA UNIT-DRIVE MAIN;CLP-300,SEC,WORLD,-,		SA
8.1-7	JC96-03610F	ELA UNIT-OPC DEV_SET;CLP-300,SEC,WORLD,S		SA
8.1-8	JC96-03611A	ELA UNIT-ITB_SET;CLP-300,SEC,WORLD,SET,-		SA
8.1-9	JC96-03615A	ELA UNIT-TONER TANK C;CLP-300,-,WORLD,1K		SNA
8.1-10	JC96-03614A	ELA UNIT-TONER TANK M;CLP-300,-,WORLD,1K		SNA
8.1-11	JC96-03613A	ELA UNIT-TONER TANK Y;CLP-300,-,WORLD,1K		SNA
8.1-12	JC96-03616A	ELA UNIT-TONER TANK K;CLP-300,-,WORLD,2K		SNA
8.1-13	JC97-02332A	MEA-UNIT CASSETTE;CLP-300,SEC,WORLD,-,-,		SA
8.1-14	JC97-02439A	MEA UNIT-COVER TOP;CLP-300,SEC,WORLD,-,-		SA
8.1-15	JC97-02440A	MEA UNIT-COVER REAR;CLP-300,SEC,WORLD,-,		SA
8.1-16	JC97-02659A	MEA-UNIT COVER FRONT;CLP-300,SEC,WORLD,-		SA
8.1-18	JC63-00863A	SHIELD-P-MAIN LOWER;CLP-300,SECC,T1.0,99		SNA
8.1-19	JC44-00090A	SMPS-PSP_TYPE3_V2C;SCX-4521F,*,AC/DC,-,2	D2114	SA
8.1-20	JC44-00089A	HVPS-GOGH;-24V,21.6V~26.4V,-,-,-		SA
8.1-21	JC59-00018E	UNIT-LSU;CLP-300,-,-,STANDARD SINGLEBEAM		SA
8.1-22	JC97-02656A	MEA UNIT-COVER LSU;CLP-300,SEC,EXPORT,-,		SA
8.1-23	JC96-03609A	ELA UNIT-FUSER 220V;CLP-300,SEC,WORLD,-,		SA
8.1-29	JC97-01771A	MEA UNIT-TERMINAL S;CLP-500,SEC,EXPORT,S	K3635	SA
8.1-30	3903-000042	CBF-POWER CORD;DT,EU,FP3/YES,IEC320 C13/	C0022	SA
8.2-1	JC61-01460A	GUIDE-M-SACKER COVER;CLP-300,ABS FR V0,		SNA
8.2-2	JC63-00846A	COVER-M-TOP;CLP-300,ABS FR,T2.5,279.1,37		SNA
8.2-3	JC63-00843A	COVER-M-JAM COVER;CLP-300,ABS FR,T2.5,80		SNA
8.2-4	JC64-00211A	KEY-M-OP1;CLP-300,ABS,-,-,36024,-,HF-066		SA
8.2-5	JC63-00860A	COVER-M-LED;CLP-300,PMMA,T1.5,52,77.9,HB		SNA
8.2-6	6107-001169	SPRING-CS;SUS304-WPB,-,PI0.55,D9.3,14.25		SA
8.2-6	6107-001278	SPRING-CS;SUS304 WPB,-,PI0.7,D6.9,L20,-,		SA
8.2-6	6107-001285	SPRING-CS;SUS304-WPB,-,PI0.45,D8.85,L12,		SNA
8.2-6	6107-001292	SPRING-CS;SUS304-WPB,-,PI0.45,D4.8,L8.5,		SNA
8.2-7	JC72-01343A	PMO-SUB_M_STACKER;ML-1520,PC,BLACK,39*25	Z4139	SA
8.2-8	JC61-01761A	HOLDER-LEVER BLOCKING;CLP-300,PC,2.5,45,		SNA
8.2-9	JC66-01297A	LEVER-MID BLOCKING;CLP-300,PC+GF20,2.5,1		SNA
8.2-10	JC66-01296A	LEVER-BLOCKING;CLP-300,POM,2.5,26,18,-,B		SNA
8.2-11	6044-000001	RING-CS;ID3,OD3,T0.25,BLACK,SUS304		SNA
8.2-11	6044-001005	RING-CS;ID4.8,OD10.0,T0.25,PASS,SUS-30		SA
8.2-12	6002-000440	SCREW-TAPPING;PWH,+,-,2,M3,L8,ZPC(BLK),S		SA
8.3-1	JC63-00844A	COVER-M-REAR;CLP-300,ABS,T3.0,249.3,296.		SNA
8.3-2	JC64-00215A	BUTTON-M-OPEN REAR;CLP-300,ABS FR V0,80.		SNA
8.3-3	JC66-01089A	SHAFT-P-LOCKBAR REAR;CLP-300,SECC,284,6,		SNA
8.3-4	JC61-01461A	HOLDER-M-HOOK REAR R;CLP-300,POM,T5.0,19		SNA
8.3-5	JC61-01456A	HOLDER-M-HOOK REAR L;CLP-300,POM,T5.0,19		SNA
8.3-6	JC61-01462A	HOLDER-M-HOOK REAR C;CLP-300,POM,T5.0,19		SNA
8.3-7	JC66-01071A	LEVER-M-REAR LOCK;CLP-300,HIPS,T2.5,55.1		SNA
8.3-8	6107-001268	SPRING-TS;SUS304 WPB,-,PI0.9,D8.9,L7,-,-		SA
8.3-8	6107-001283	SPRING-TS;SWRS82A,-,1.0X0.6,D13.70,L12.1		SA
8.3-8	6107-001284	SPRING-TS;SWRS82A,-,0.75X0.5,-,L8.4,-,-,		SNA
8.3-10	JC96-03990A	ELA UNIT-TRANSFER;CLP-300,SEC,EXPORT,-,-		SA
8.4-1	JC63-00841A	COVER-M-FRONT;CLP-300,ABS FR,T2.5,185.3,		SNA
8.4-2	JC68-01678A	LABEL-INSTRUCTION;CLP-300,-,YUPO 150G,15		SNA
8.5-1	JC61-01450A	BRACKET-P-DRIVE MOTOR;CLP-300,SECC,T1.2,		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
8.5-2	6031-001528	WASHER-PLAIN;POLYIMIDE,-,ID6,OD13.5,T0.5,		SA
8.5-2	6031-001051	WASHER-PLAIN;M4,ID4.1,OD7.0,T0.13,*,POLY		SNA
8.5-2	6031-001543	WASHER-PLAIN;POLY,-,ID5.1,OD8,T0.13,-,-		SNA
8.5-2	6031-001547	WASHER-PLAIN;POLY,-,ID6.6,OD9,T0.5,-,-		SNA
8.5-3	JC66-01042A	GEAR-IDLE DEVE Z19;CLP-300,POM,M0.8,Z19,		SA
8.5-4	JC66-01052A	GEAR-RDCN DEVE CAM;CLP-300,POM,M0.8/M0.6		SA
8.5-5	JC66-01041A	GEAR-DEVE COUPLING;CLP-300,POM,M0.8,Z18,		SA
8.5-6	6107-001271	SPRING-CS;SUS304 WPB,-,PI0.55,D6.75,L9.0		SA
8.5-7	JC66-01047A	GEAR-IDLE Z39;CLP-300,POM,M0.8,Z39,-,WHI		SA
8.5-8	JC66-01065A	GEAR-TONER DRIVE;CLP-300,POM,M0.8/Z0.8,Z		SA
8.5-9	JC66-01046A	GEAR-IDLE Z33;CLP-300,POM,M0.8,Z33,-,WHI		SA
8.5-10	JC66-00763A	GEAR-M-PICK UP IDLE;CLP-600,POM,M0.8,SPU	G0031	SA
8.5-11	JC47-00007E	MEP-CLUTCH CAM;- ,CLP-300,-,DC24V,0.133A,		SA
8.5-12	JC66-01208A	GEAR-RDCN FUSER CAM;CLP-300,POM,M0.8/Z0.		SA
8.5-13	JC66-01045A	GEAR-IDLE ITB Z43;CLP-300,POM,M0.5,Z43,-		SA
8.5-14	JC66-01048A	GEAR-ITB DRIVE;CLP-300,POM,M0.5/M0.5,Z10		SA
8.5-15	JC66-01054A	GEAR-RDCN OPC;CLP-300,POM,M0.5/M0.6,Z79/		SA
8.5-16	JC63-01049A	SHEET-HOUSING ITB;CLP-300,PET FILM,T0.18		SNA
8.5-17	JC66-01051A	GEAR-RDCN DEVE;CLP-300,POM,M0.5/M0.8,Z73		SA
8.5-18	JC66-01055A	GEAR-RDCN P_PATH;CLP-300,POM,M0.5/M0.8,Z		SA
8.5-19	JC66-01050A	GEAR-PICK UP DRIVE;CLP-300,POM,M0.8/M0.8		SA
8.5-20	JC66-01044A	GEAR-FUSER DRIVE 1;CLP-300,POM,M0.8,Z45,		SA
8.5-21	JC66-01053A	GEAR-RDCN EXIT;CLP-300,POM,M0.8/M0.8,Z51		SA
8.5-22	JC66-01043A	GEAR-DEVE DRIVE;CLP-300,POM,M0.6,Z21,-,W		SA
8.5-23	6031-001255	WASHER-PLAIN;NYLON,CUTTING,ID5,OD9,T0.5,	W0004	SA
8.5-24	JC66-00771A	GEAR_ M_IDLE PICKUP;CLP-600,POM,M0.8,SPU	G0010	SA
8.5-25	JC61-01459A	BRACKET-M-DRIVE FRONT;CLP-300,PC,T2.5,W1		SNA
8.5-26	JC66-01061A	SHAFT-IDLE D8;CLP-300,SUM24L+NI,L16.7,D1		SNA
8.5-27	JC66-01064A	GEAR-IDLE Z37;CLP-300,POM,M0.8,Z37,-,WHI		SA
8.5-28	6003-000301	SCREW-TAPTITE;BH,+,S,M4,L6,ZPC(YEL),SWRC		SNA
8.5-28	6003-000152	SCREW-TAPTITE;PH,+,B,M2,L10,ZPC(YEL),SWR		SA
8.5-28	6002-000308	SCREW-TAPTITE;PH,+,B,M2.6,L6,ZPC(YEL),SW	-	SA
8.5-29	JC66-01060A	SHAFT-WORM GEAR;CLP-300,SUM24L+NI,L44.6,		SNA
8.5-30	JC66-01057A	GEAR-WORM DEVE CAM;CLP-300,POM,M0.6/M0.6		SA
8.5-31	6044-000159	RING-C;ID3,OD7,T0.6,PASS,STSC	Z4357	SA
8.5-32	6001-000130	SCREW-MACHINE;BH,+,M3,L6,ZPC(WHT),SWRCH1	-	SA
8.5-32	6001-000485	SCREW-MACHINE;PH,+,M2.6,L4,ZPC(YEL),SWRC		SNA
8.5-33	JC66-01070A	LATCH-M-HUB CLUTCH;CLP-300,POM,T2.0,D18.		SNA
8.5-34	JC66-01155A	GEAR-FUSER RDCN OUT V;ML-3560,HTNFR52G30		SNA
8.5-35	6044-000231	RING-E;ID5.0,OD11.0,T0.6,PASS,STS304	R0006	SA
8.5-36	JC66-01068A	SHAFT-M-T2 CAM;CLP-300,POM,L52,D20,BLACK		SA
8.5-37	JC66-01067A	SHAFT-M-ITB CLEAN CAM;CLP-300,POM,L44,D2		SA
8.5-38	JC31-00041A	MOTOR DC-DEVE DRIVE;50M843A152,CLP-600,2	M0024	SA
8.5-39	JC33-00015C	SOLENOID-PICK UP;- ,CLP-300,DC24V,48\$U;¼1 S		SA
8.5-40	6003-000269	SCREW-TAPTITE;BH,+,S,M3,L6,ZPC(YEL),SW		SA
8.5-41	JC61-01458A	BRACKET-M-DEVE CAM;CLP-300,PC+ABS,T2.5,W		SNA
8.5-42	6003-000196	SCREW-TAPTITE;PWH,+,B,M3,L10,NI PLT,SWRC	Z4397	SA
8.5-43	JC67-00130A	CAP-M-PUSH COUPLING;CLP-300,POM,T2.0,D13		SA
8.5-44	JC97-01788B	MEA UNIT-CLUTCH DEV;CLP-300,-,WORLD,M0.6		SA
8.5-45	JC66-01066A	SHAFT-M-DEVE CAM;CLP-300,POM,L116,D18.3,		SA
8.5-46	JC92-01720A	PBA SUB-DEVE_HOME;CLP-300,SEC,KOREA,DEVE		SA
8.5-47	JC61-01453A	HOLDER-M-LINK BLACK;CLP-300,PC+ABS,T2.5,		SA
8.5-48	JC66-01097A	LINK-M-PUSH BLACK CAP;CLP-300,POM,22,T2.		SA
8.5-49	JC61-00699A	BUSH-D6/L4;CLP-500,BRONZE+ST,ID6.0,OD9.0	B0027	SA
8.5-50	6502-001093	CABLE CLAMP;DAWS-3NE,ID11*L34.8,-,NYLON6	C0002	SA
8.5-50	6502-000121	CABLE CLAMP;DAMC-101,D7~8,L19,SCP-1,NTR		SNA
8.5-51	0205-001003	GREASE-BEARING;NYOGEL788,DAMPING GREASE,		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
8.5-51	0205-001059	GREASE-BEARING;PETAMO GHV 133,BEIGE,15KG		SNA
8.5-51	0205-001080	GREASE-BEARING;NYOGEL 774H,NOISE DAMPING		SNA
8.5-51	0205-001095	GREASE-BEARING;NYE8512,NOISE DAMPING(BLU		SNA
8.5-52	JF68-10532B	LABEL(P)-BAR CODE;CLP-500,-,YUPO PAPER,1		SNA
8.6-27	JC66-01133A	LEVER-M-ACTUATOR FEED;CLP-300,PC,T2.5,34		SNA
8.6-65	6044-000125	RING-E;ID4,OD9,T0.6,PASS,STSC	R0004	SA
8.6-11	6107-001282	SPRING-CS;C5210W,-,PI0.6,-,L12.5,-,ID3		SA
8.6-7	6501-000004	CABLE TIE;DA-80,T1,W2.5,L80,NTR,NYLON66	K2756	SA
8.6-34	JC39-00302A	CBF HARNESS-100M_GND;CLP-500,-,1 PIN,5	C0007	SA
8.6-34	JC61-01486A	PLATE-P-GROUND PICKUP;CLP-300,C5210P,T0.		SNA
8.6-35	JC63-00854A	COVER-M-GROUND OPC;CLP-300,ABS HB,T1.5,		SNA
8.6-35	JC39-00493A	CBF HARNESS-THER;CLP-300,WIRE HARNESS,UL		SA
8.6-54	JC39-00497A	CBF HARNESS-INLET;CLP-300,WIRE HARNESS,U		SA
8.6-37	6107-001163	SPRING-CS;SUS304-WPB,-,PI0.4,D3.9,L13,-,		SA
8.6-37	JC39-00498A	CBF HARNESS-COVER S/W;CLP-300,WIRE HARNE		SA
8.6-38	JC39-00578A	CBF HARNESS-GND_BRK;CLP-300,WIRE HARNESS		SA
8.6-38	JC61-00829B	HOLDER-BEARING EXIT F/DOWN;CLP-300,POM(A		SA
8.6-39	JC39-00579A	CBF HARNESS-LSU_S/W;CLP-300,WIRE HARNESS		SA
8.6-39	JC66-01149A	ROLLER-EXIT MAIN;CLP-300,PFA,D8.5,L23,BL		SA
8.6-47	JC39-00581A	CBF HARNESS-FUSER_AC;CLP-300,WIRE HARNES		SA
8.6-41	JC39-00583A	HARNESS-GND_FRAME;CLP-300,WIRE HARNESS,U		SA
8.6-41	JC66-01040A	ROLLER-EXIT F DOWN;CLP-300,SUM22/EPDM,D4		SNA
8.6-55	JC47-00009C	MEP-CLUTCH REGI;-CLP-300,3.0W,DC24V,125		SA
8.6-55	JC61-01546A	SPRING ETC-OPC LOCK L;CLP-300,C5210W,D1.		SA
8.6-58	JC47-00014A	MEP-CLUTCH CAM;-CLP-300,-,DC24V,0.18A,C		SA
8.6-58	JC61-01566A	HOLDER-M-CLUTCH FUSER;CLP-300,PC+ABS,T2.		SNA
8.6-1	JC61-01443A	FRAME-M BASE GOGH;CLP-300,PC+ABS,NH-1000		SNA
8.6-33	JC61-01451A	PLATE-P-GROUND OPC L;CLP-300,C5210P,T0.2		SNA
8.6-59	JC61-01478A	GUIDE-M-HARNESS;CLP-300,ABS,HB,T2.5,118.		SNA
8.6-18	JC61-01482A	PLATE-P-GROUND FUSER;CLP-300,SUS304-CSP,		SNA
8.6-13	JC61-01483A	PLATE-P-GROUND LSU;CLP-300,C5210P,T0.2,1		SNA
8.6-16	JC61-01484A	PLATE-P-GROUND T2;CLP-300,C5210P,T0.2,21		SNA
8.6-14	JC61-01485A	PLATE-P-GROUND REGI;CLP-300,SUS304 CSP,T		SNA
8.6-19	JC61-01489A	PLATE-P-GROUND EXIT;CLP-300,SUS 304 CSP,		SNA
8.6-17	JC61-01537A	PLATE-P-SHAFT LACK;CLP-300,SECC,T1.0,4,1		SNA
8.6-15	JC61-01547A	SPRING ETC-OPC LOCK R;CLP-300,C5210W,D1.		SA
8.6-57	JC61-01548A	HOLDER-M-CAM;CLP-300,POM (DE8903),T2.0,1		SNA
8.6-2	JC61-40001A	FOOT-ML80;ML-80,NBR,-,GRAY,-,-,-	F0003	SA
8.6-60	JC61-70940A	SPRING ETC-TR(12);ML-5500,-,4.5,-,12.7,1	O1054	SA
8.6-3	JC66-00050A	CAM-CATCH;ML-9400W,POM,-,34j18j7,WHITE S	C0004	SA
8.6-12	JC66-00346A	GEAR-MP/DUP DRV;SCX-5100,POM,SW-01,M0.8,	G0340	SA
8.6-10	JC66-01056A	GEAR-REGI DRIVE;CLP-300,POM,M0.8,Z32,-,W		SA
8.6-62	JC66-01120A	SHAFT-FEED IDLE;CLP-300,SUM22+NI,L237,D8		SNA
8.6-64	JC66-01128A	ROLLER-REGI;CLP-300,SUM22+EPDM,D6.0/D14.		SNA
8.6-67	JC66-01207A	SHAFT-M-CLUTCH FUSER;CLP-300,POM,L39.8,D		SA
8.6-68	JC70-00050A	IPR-TERMINAL;SF-5100,SWRCH1018,-,-,-,8		SNA
8.6-61	JC72-00102A	PMO-BUSHING_TR(L);SF-5100,POM (CH-15),BL	O1101	SA
8.6-20	JC92-01714A	PBA SUB-PANEL;CLP-300,SEC,KOREA,PANEL,-,		SA
8.6-32	JC92-01723A	PBA SUB-WASTE_T;CLP-300,SEC,KOREA,WASTE_		SA
8.6-72	JC92-01718A	PBA SUB-EXIT;CLP-300,SEC,KOREA,EXIT SENS		SA
8.6-49	6006-000127	SCREW-MACHINE;WS,PH,+,M3,L6,ZPC(YEL),SWR		SNA
8.6-75	6021-000222	NUT-HEXAGON;2C,M3,ZPC(YEL),SM20C,-		SNA
8.6-46	JC70-10961A	IPR-TERMINAL FU;ML-165,C5210P,-,T0.3,-,-	K3422	SA
8.6-45	JC72-41010A	PMO-HOUSING TERMINAL;ML-165,ABS GF10%,BL	H6086	SA
8.6-78	JC97-02362A	MEA UNIT-DRAW;CLP-300,SEC,WORLD,-,-,-,-		SA
8.6-79	6009-001396	SCREW-SPECIAL;PH,+,M3,L10.3,ZPC(BLK),S		SNA
8.6-5	JC39-00488A	CBF HARNESS-MAIN_DRAW;CLP-300,WIRE HARNE		SA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
8.6-4	JC61-01521A	PLATE-P-DRAW CONNECTOR;CLP-300,SECC,T1.0		SNA
8.6-26	JC61-00018A	SPRING ETC-SENSOR;SF-5100,SUS304WPB,0.2,		SNA
8.6-28	JC61-01480A	HOLDER-M-ACTUATOR FEED;CLP-300,ABS,T2.5,		SNA
8.6-87	JC72-00463A	PMO-CAP CONNECTOR L;ML-6060A,POM,BLACK,-	Z0013	SA
8.6-88	JC72-00465A	PMO-CAP CONNECTOR U;ML-6060A,POM,BLACK,-	Z0014	SA
8.6-36	JC61-01477A	FRAME-M-EXIT;CLP-300,PC,NH-1035,5V,BLACK		SNA
8.6-42	JC61-01568A	HOLDER-M-EXIT F DOWN;CLP-300,PC,T2.5,25.		SNA
8.6-44	JC66-00810A	GEAR-EXIT_DRV17;ML-1610,POM,0.8,17,-,BLK	O1073	SA
8.6-100	6107-001167	SPRING-CS;SUS304-WPB,-,PI0.25,D3.25,L9.6	Z4318	SA
8.6-101	JC61-01151A	HOUSING-M-PICK_U;ML-1610,POM,-,-,35,NATU	P2067	SA
8.6-102	JC61-01173A	HOUSING-M-PICK_UP B;ML-1610,ABS HB,-,-,3	P2068	SA
8.6-103	JC61-01473A	GUIDE-M-PICK UP;CLP-300,PC+ABS,HB,T2.5,5		SNA
8.6-104	JC61-01533A	PLATE-P-PICK UP;CLP-300,SECC,T1.0,264,43		SNA
8.6-105	JC61-01538A	HOLDER-M-PAD;CLP-300,PC+ABS,HB,T2.5,-,-,		SNA
8.6-106	JC61-01570A	GUIDE-M-PAPER;CLP-300,POM M90-44,T2.0,15		SNA
8.6-107	JC61-70911A	SPRING ETC-EXIT ROLL FD;ML-165,SUS304 WP	O1053	SA
8.6-108	JC66-00815A	LEVER-M-KICKER P/U;ML-1610,POM,-,10.5,31	R1120	SNA
8.6-109	JC66-01076A	GEAR-PICK UP A;CLP-300,POM,M0.8,Z45,-,WH		SA
8.6-110	JC66-01077A	GEAR-PICK UP B;CLP-300,POM,M0.8,Z45,-,WH		SA
8.6-111	JC66-01080A	SHAFT-P-PICKUP;CLP-300,SECC,L286,T1.2,-,		SNA
8.6-112	JC66-01105A	CAM-M-PICK UP;CLP-300,POM M90-44,-,-,WHI		SNA
8.6-113	JC69-00961A	PAD-FRICTION;CLP-300,NBB,T1.0,W9.0,L39.5		SA
8.6-114	JC73-00211A	RUBBER-PICK_UP;ML-1610,EPDM+IR,MM,-,-,-,	P2148	SA
8.6-23	JB61-00076A	SPRING ETC-TORSION DOC (CC2-F);SCX-1110F	O1013	SA
8.6-25	JC61-01481A	HOLDER-M-ACTUATOR EMPTY;CLP-300,ABS,T2.5		SNA
8.6-24	JC66-01119A	LEVER-M-ACTUATOR EMPTY;CLP-300,PC,T2.5,5		SNA
8.7-1	JC67-00168A	BRUSH-LSU;CLP-300,PP BRUSH,-,W4.5,L180.6		SNA
8.7-2	JC64-00267A	SHUTTER-LSU;CLP-300,ABS GF20,T2.5,W11.5,		SNA
8.7-3	JC63-00839A	COVER-M-LSU;CLP-300,ABS HB,T2.0,239.5,1		SNA
8.7-4	6107-001295	SPRING-CS;SUS304,-,PI0.45,D5.45,L22.5,-,		SNA
8.7-5	JC63-01093A	SHEET-LSU FRONT;CLP-300,PET SHEET,T0.188		SNA
8.7-6	JC62-00338A	SEAL-COVER LSU;CLP-300,EPDM,-,T2.5,W8,L1		SNA
8.8-1	JC61-01474A	FRAME-M-UPPER FUSER;CLP-300,PET+GF30%,BN		SNA
8.8-2	JC61-01475A	FRAME-M-LOWER FUSER;CLP-300,PET+GF30%,BN		SNA
8.8-3	JC66-01078A	ROLLER-HEAT;CLP-300,AL5052+RUBBER,D27.5,		SNA
8.8-4	JC66-00669A	GEAR-FUSER;SCX-5315F,PPS, OFL4036,1,34,P		SA
8.8-5	JC66-10902A	BEARING-H/R L;ML-165,PPS(RBA313N),-,ID26	B1019	SA
8.8-6	JC72-00814A	PMO-BEARING H/R-F;SCX-5100,-,PPS,BLK,V0,	B1040	SA
8.8-7	4712-001027	THERMOSTAT;125/250VAC,15/7.5A,170+-5C,0C	T0002	SA
8.8-8	JC66-01079A	ROLLER-PRESSURE;CLP-300,SUM22,D16,L237.5		SNA
8.8-9	JC66-01111A	ROLLER-PRESSURE SHAFT;CLP-300,SUM22,D8.0		SNA
8.8-10	JC61-01490A	HOLDER-M-BUSH 2PR_R;CLP-300,PBT,T2.0,33.		SNA
8.8-11	JC61-01491A	HOLDER-M-BUSH 2PR_L;CLP-300,PBT,T2.0,33.		SNA
8.8-12	JC61-01534A	BUSH-M-2PR L;CLP-300,PPS(RBA313N),-,5.		SNA
8.8-13	JC61-01535A	BUSH-M-2PR R;CLP-300,PPS(RBA313N),-,5.3,		SNA
8.8-14	JC61-01522A	GUIDE-M-INPUT FUSER;CLP-300,PET+GF30%,5V		SNA
8.8-15	JC66-01110A	LEVER-M-ACTUATOR EXIT;CLP-300,PET+GF30%,		SNA
8.8-16	JC61-01476A	PLATE-P-GROUND FUSER;CLP-300,SUS 304 CSP		SNA
8.8-17	JC70-00518A	ELECTRODE-P-AC R;CLP-300,C5210P T0.8,D3.		SNA
8.8-18	JC70-00519A	ELECTRODE-P-AC L;CLP-300,C5210P T0.8,D3.		SNA
8.8-19	JC68-00407A	LABEL(R)-HV FUSER;ML-6060,PVC,-,220V,-,,	L0006	SNA
8.8-20	JC68-01134A	LABEL(P)-BLANK(FUSER);ML-1710D3,-,WHITE		SNA
8.8-21	JC68-01581A	LABEL(P)-CAUTION HOT;COMMON,SAMSUNG,PET,		SNA
8.8-22	6107-001246	SPRING-CS;SWP-B,-,PI0.9,D5.6,L16.6,-,-,I		SNA
8.8-23	6107-001267	SPRING-CS;SWP-B,-,PI1.0,D5.9,L17,-,-,ID4		SA
8.8-24	JC39-00500A	CBF HARNESS-FUSE_LINK1;CLP-300,WIRE HARN		SA
8.8-25	JC39-00501A	CBF HARNESS-FUSE_LINK2;CLP-300,WIRE HARN		SA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
8.8-27	6003-000261	SCREW-TAPTITE;BH,+,B,M3,L6,ZPC(YEL),SWRC		SNA
8.8-28	4713-001210	LAMP-HALOGEN;230V,-,850W,-,-,8x299.5mm		SA
8.8-29	1404-001368	THERMISTOR-NTC ASSY;1KOHM,-,4537K,0.25MW		SA
8.8-30	JC70-00064A	IPR-PIN ROLLER EXIT;SF-5100,SUS304,PI1.8		SNA
8.8-31	JC72-20902A	PEX-ROLLER F/UP(2);ML-5000A,TEFLON,WHT,-	O1106	SA
8.8-32	JC72-00382A	PMO-BUSHING TX;ML-6060A,POM M9044,BLK,-,		SNA
8.8-33	JC66-01206A	SHAFT-M-CAM FUSER;CLP-300,PC+GF30%,L252.		SNA
8.8-34	JC61-01647A	HOLDER-M-SHAFT FUSER;CLP-300,PC,T2.0,-,L		SNA
8.8-35	JC66-01147A	LEVER-M-RELEASE;CLP-300,PET+GF30%,T1.5,W		SNA
8.8-36	JC66-01148A	LEVER-M-LINK FUSER;CLP-300,PET+GF30%,T1.		SA
8.8-37	JC61-01523A	GUIDE-M-OUTPUT FUSER;CLP-300,PET+GF30%,5		SNA
8.8-38	JC61-01271A	SPRING ETC-ACTUATOR;CLP-600,SUS304 ,0.35	S0018	SA
8.8-39	JC97-02778A	MEA UNIT-GUIDE PR;CLP-300,SEC,EXPORT,-,-		SNA
8.8-40	6107-001290	SPRING-CS;SUS304 WPB,-,PI0.55,D5.55,L16,		SA
8.8-41	JC66-01231A	ROLLER-DUMMY;CLP-600,PFA,OD6.0,L10.0,-,-		SNA
8.8-42	JC61-01685A	SPRING ETC-DUMMY;CLP-600,SUS,0.5,-,-,20.		SA
8.8-43	JC61-01679A	SPRING ETC-GROUND;CLP-300,SUS 304 WPB,¥Ö		SA
8.9-2	6006-001078	SCREW-TAPTITE;WSP,PH,+,M3,L10,ZPC(YEL),S		SNA
8.9-4	JC39-00499A	CBF HARNESS-JOIN_DRAW;CLP-300,WIRE HARNE		SNA
8.9-5	JC63-01142A	SHEET-FILM YELLOW UP;CLP-300,PC,T0.38,W5		SNA
8.9-6	JC67-00199A	CAP-DEVE;CLP-300,PP,-,31.5,62,-,-		SNA
8.9-7	JC68-01708A	LABEL-INFORMATION;CLP-300,-,WHITE POLY,T		SNA
8.9-8	JC68-10914D	LABEL(P)-SERIAL NO;ML-85,ART,70X15,G100,		SNA
8.9-9	JC69-01013A	CUSHION-DEVE;CLP-300,EPP,T10,W75,L351,-,		SNA
8.9-10	JC96-03911A	ELA UNIT-DEV MAIN SET;CLP-300,SEC,EXPORT		SNA
8.9-11	JC97-02571A	MEA UNIT-OPC SET;CLP-300,SEC,WORLD,-,-,-		SNA
8.9-12	JC97-02613A	MEA UNIT-DEV Y;CLP-300,SEC,EXPORT,-,-,-,		SNA
8.9-13	JC97-02614A	MEA UNIT-DEV M;CLP-300,SEC,EXPORT,-,-,-,		SNA
8.9-14	JC97-02615A	MEA UNIT-DEV C;CLP-300,SEC,EXPORT,-,-,-,		SNA
8.9-15	JC97-02616A	MEA UNIT-DEV K;CLP-300,SEC,EXPORT,-,-,-,		SNA
8.9-16	JC97-02619A	MEA UNIT-TONER WASTE;CLP-300,SEC,EXPORT,		SNA
8.10-4	0604-001257	PHOTO-INTERRUPTER;TR,-,-,DIP-4,BK		SNA
8.10-4	0604-001154	PHOTO-INTERRUPTER;TR,0.2-1.0MA,80MW,DIP,	P0012	SA
8.10-5	6003-000282	SCREW-TAPTITE;BH,+,B,M3,L8,ZPC(BLK),SW		SA
8.10-6	6031-000019	WASHER-PLAIN;- ,ID6.1,OD8.5,T0.1,BLK,POLY		SNA
8.10-7	6107-001287	SPRING-CS;SUS304-WPB,-,PI0.6,D6.5,L25,-,		SNA
8.10-8	6107-001288	SPRING-CS;SUS304-WPB,-,PI0.35,D3.55,L12,		SNA
8.10-9	6107-001289	SPRING-CS;SUS304-WPB,-,PI0.8,D3.8,L22,-,		SNA
8.10-10	JC02-00054A	TONER-BLACK;CLP-300,SAK-79JG-K1,BLACK,8.		SNA
8.10-11	JC39-00489A	CBF HARNESS-ITB_JOINT;CLP-300,WIRE HARNE		SNA
8.10-12	JC39-00502A	CBF HARNESS-ITB_HOME;CLP-300,WIRE HARNES		SNA
8.10-14	JC61-01494A	FRAME-M-ITB;CLP-300,ABS+GF20%,GR-4020,-,		SNA
8.10-15	JC61-01495A	FRAME-M-WASTE ITB;CLP-300,ABS GF20%,GR-4		SNA
8.10-16	JC61-01497A	HOUSING-M-CLEANING ITB;CLP-300,ABS GF 20		SNA
8.10-17	JC61-01498A	HOLDER-M-BUSH CHARGE;CLP-300,POM(M90-44)		SNA
8.10-18	JC61-01499A	GUIDE-M-POLE ITB;CLP-300,ABS HF-0660I,-,		SNA
8.10-19	JC61-01502A	BRACKET-P-HOUSING LEFT;CLP-300,SECC,1.2T		SNA
8.10-20	JC61-01503A	BRACKET-P-HOUSING RIGHT;CLP-300,SECC,1.2		SNA
8.10-21	JC61-01504A	PLATE-P-GND ITB;CLP-300,BRONZE(C5210P-H)		SNA
8.10-22	JC61-01505A	HOLDER-M-PTL;CLP-300,ABS HB HF-0660I,10.		SNA
8.10-23	JC61-01506A	HOLDER-M-HOME SENSOR;CLP-300,ABS HB(HF-0		SNA
8.10-24	JC61-01536A	BUSH-M-CHARGE CLEANING;CLP-300,POM(M90-4		SNA
8.10-25	JC61-01539A	BUSH-M-DRIVE ITB;CLP-300,POM(M90-44),ID6		SNA
8.10-26	JC61-01540A	BUSH-M-ITB;CLP-300,POM(M90-44),ID6,OD8.1		SNA
8.10-27	JC61-01541A	BUSH-M-TR ITB;CLP-300,POM(AT-15CF),ID6,-		SNA
8.10-28	JC61-01542A	BUSH-M-IDLER WASTE BELT;CLP-300,POM(M90-		SNA
8.10-29	JC61-01543A	BUSH-CHARGE LEFT;CLP-300,SINTERED BRONZE		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
8.10-30	JC61-01701A	SPRING ETC-SHUTTER;CLP-300,SWP-B,1E0.35,S		SNA
8.10-31	JC61-01704A	SPRING ETC-GROUND ITB;CLP-300,SUS304-WPB		SNA
8.10-32	JC62-00210A	SEAL-AUGER OPC;CLP-300,PORON LE-20,-,5T,		SNA
8.10-33	JC62-00212A	SEAL-BELT ITB;CLP-300,URETHANE FILM,-,0.		SNA
8.10-34	JC62-00213A	SEAL-LOW ITB;CLP-300,POLYURETHANE+PET,-,		SNA
8.10-35	JC62-00217A	SEAL-COVER WASTE;CLP-300,PORON,-,T2,W11.		SNA
8.10-36	JC62-00219A	SEAL-BACK ITB;CLP-300,POLYURETHANE FOAM,		SNA
8.10-37	JC62-00221A	SEAL-BACK ITB RIGHT;CLP-300,POLYURETHANE		SNA
8.10-38	JC62-00222A	SEAL-SIDE ITB LEFT;CLP-300,POLYURETHANE		SNA
8.10-39	JC62-00223A	SEAL-SIDE ITB RIGHT;CLP-300,POLYURETHANE		SNA
8.10-40	JC62-00229A	SEAL-BLADE ITB LEFT;CLP-300,POLYURETHANE		SNA
8.10-41	JC62-00232A	SEAL-TOP ITB;CLP-300,PE FOAM(S/T),-,10T,		SNA
8.10-42	JC62-00257A	SEAL-FRAME WASTE ITB;CLP-300,PORON LE-20		SNA
8.10-43	JC62-00258A	SEAL-WASTE OPC;CLP-300,PORON LE-20,-,T0.		SNA
8.10-44	JC62-00281A	SEAL-HOUSING ITB L;CLP-300,PORON LE-20,B		SNA
8.10-45	JC62-00282A	SEAL-HOUSING ITB R;CLP-300,PORON LE-20,B		SNA
8.10-46	JC62-00326A	SEAL-WASTE SIDE;CLP-300,POLY URETHANE FO		SNA
8.10-47	JC63-00857A	COVER-M-WASTE ITB;CLP-300,PC,2.0T,W49.4,		SNA
8.10-48	JC63-00859A	COVER-M-WASTE EXIT;CLP-300,POM(M90-44),T		SNA
8.10-49	JC63-00862A	COVER-M-HANDLE ITB;CLP-300,ABS HF-0660I,		SNA
8.10-50	JC63-01045A	SHEET-FRAME ITB;CLP-300,PC,T0.125,W80.5,		SNA
8.10-52	JC63-01124A	SHEET-HOUSING ITB F;CLP-300,PET,T0.188,W		SNA
8.10-53	JC63-01170A	SHEET-BLADE ITB;CLP-300,PC,T0.5,5,222.5,		SNA
8.10-54	JC66-01082A	ARM-M-BLADE ITB;CLP-300,PC,T5.0,53,L71,B		SNA
8.10-55	JC66-01083A	SHAFT-M-BELT WASTE;CLP-300,POM(M90-44),L		SNA
8.10-56	JC66-01085A	SHAFT-M-AUGER ITB;CLP-300,ABS+GF20%,253,		SNA
8.10-57	JC66-01087A	GEAR-AUGER ITB;CLP-300,POM (M90-44),M0.8		SNA
8.10-58	JC66-01112A	DRUM-ITB BELT;CLP-300,PI,OD120,W240,L376		SNA
8.10-59	JC66-01131A	ROLLER-T1;CLP-300,NBR + ECO FORM,OD14,L2		SNA
8.10-60	JC67-00027A	LENS-PTL;ML-1710,PMMA,NTR,-,-,-,-	K3433	SA
8.10-62	JC72-40332A	PMO-BUSHING CHARGE;ML-80,POM,BLK,HB,-		SNA
8.10-63	JC73-00222A	RUBBER-BELT WASTE ITB;CLP-300,CR+NR20%,1		SNA
8.10-64	JC92-01709A	PBA SUB-ITB JOINT;CLP-300,SEC,KOREA,ITB-		SNA
8.10-71	JC92-01724A	PBA SUB-PTL;CLP-300,SEC,KOREA,PTL,-,-,-,		SNA
8.10-75	JC97-02645A	MEA UNIT-BLADE ITB;CLP-300,SEC,EXPORT,-,		SNA
8.10-81	JC97-02646A	MEA UNIT-ROLL DRV ITB;CLP-300,SEC,EXPORT		SNA
8.10-85	JC97-02695A	MEA UNIT-ROLL IDL ITB;CLP-300,SEC,WORLD,		SNA
8.11-1	JC61-01530A	FRAME-M-SEMI CASSETTE;CLP-300,ABS,HF-066		SNA
8.11-2	JG61-70531A	SPRING ETC-LOCKER,PLATE;SF6000,STS304WPB	S0025	SA
8.11-3	JC64-00222A	LOCKER-M-KNOCK UP R;CLP-300,POM (M90-44)		SA
8.11-4	JC64-00223A	LOCKER-M-KNOCK UP L;CLP-300,POM (M90-44)		SA
8.11-5	JC97-02218A	MEA UNIT-PLATE KNOCK UP;ML-1610,SAMSUNG,	K3602	SA
8.11-6	6107-001240	SPRING-CS;SUS304-WPB,GROUND END,PI0.6,D1	D4084	SA
8.11-7	JC70-00516A	ADJUST-M-CASSETTE R;CLP-300,ABS HB,T2.5,		SA
8.11-8	JC70-00517A	ADJUST-M-CASSETTE L;CLP-300,ABS HB,T2.5,		SA
8.11-9	JG66-40003A	GEAR-PINION;SF4000,POM,WHT,M1,Z16	O1127	SA
8.11-13	JC63-00869A	TRAY-M-EXTENSION SMALL;CLP-300,ABS,T2.5,		SNA
8.11-14	JC63-00855A	COVER-M-CASSETTE;CLP-300,ABS,T2.5,77,224		SNA
8.11-15	JC61-01559A	BAR-M-PUSH;CLP-300,POM(M90-44),-,-,WHITE		SNA
8.11-16	JC68-01679A	LABEL-INSTRUCTION;CLP-300,-,WHITE PET,T0		SNA
8.11-17	JC68-01680A	LABEL-INSTRUCTION;CLP-300,-,WHITE PET,T0		SNA
#N/A	0105-001032	PAPER-ART;- ,W210,-,WHITE,HANSOL,L297		SNA
#N/A	JC63-00845A	COVER-M-RIGHT SIDE;CLP-300,ABS FR,T2.5,2		SA
#N/A	JC68-01564A	MANUAL-INSTALL;CLP-300,SEC,WORLD,-,M150,		SNA
#N/A	JC69-00919B	BOX(P)-MAIN;CLP-300,OFFSET4,A-1,515,424,		SA
#N/A	JC92-01707B	PBA MAIN-GOGH NET;CLP-300,SEC,KOREA,GDI,		SA
#N/A	JC96-03590A	ELA UNIT-MAIN LINE;CLP-300,SEC,WORLD,220		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
#N/A	JC99-01896A	PAA MAIN-PACKING;CLP-300,SAMSUNG,EXPORT,		SNA
#N/A	JC99-01897B	PAA WOOD-LABEL(SEE);CLP-300/SEE,EU,GOGH,		SNA
#N/A	JC99-01898C	INA-ACCESSORY(SEE);CLP-300,SAMSUNG,SEE,2		SNA
#N/A	0202-001240	SOLDER-WIRE;HSE-01,-,D3,SN/0.5CU/0.03NI/		SNA
#N/A	0202-001492	SOLDER-WIRE FLUX;HSE-02 LFM48 SR-34 S,-,		SNA
#N/A	0203-000007	TAPE-FILAMENT;3M,T0.15,W18,L55M,TRP		SNA
#N/A	0203-001100	TAPE-OPP MASKING;OPP/W75/CLR,T0.05,W75,L		SNA
#N/A	0203-001159	TAPE-FILAMENT;#8915,T0.15,W12,L55000,CLR		SNA
#N/A	0204-000469	THINNER;#4662,-,0.795,-		SNA
#N/A	0204-002978	FLUX;KSP-70L,-,84%,FLUX,SPRAY		SNA
#N/A	0205-001056	GREASE-GRAPHITE;CRS841,WHT,-		SNA
#N/A	1103-001273	IC-EEPROM;24C64A,64Kbit,8Kx8Bit,DIP,8P,9		SA
#N/A	2801-003886	CRYSTAL-UNIT;12MHz,50ppm,28-AAA,16pF,50o		SNA
#N/A	3704-000349	SOCKET-IC;8P,DIP,SN,2.54MM		SNA
#N/A	3711-000164	HEADER-BOARD TO CABLE;1WALL,2P,1R,2.5mm,		SNA
#N/A	3711-000198	HEADER-BOARD TO CABLE;1WALL,3P,1R,2.5MM,		SA
#N/A	3711-000203	HEADER-BOARD TO CABLE;1WALL,2P/3P,1R,7.9		SA
#N/A	3711-002410	HEADER-BOARD TO CABLE;BOX,10P,2R,2mm,STR		SNA
#N/A	3711-003035	HEADER-BOARD TO CABLE;BOX,14P,2R,2mm,STR		SA
#N/A	3711-003204	HEADER-BOARD TO CABLE;BOX,24P,2R,2mm,STR		SA
#N/A	3711-003340	HEADER-BOARD TO CABLE;BOX,16P,2R,2mm,STR		SA
#N/A	3711-003408	HEADER-BOARD TO CABLE;BOX,2P,1R,2mm,STRA		SNA
#N/A	3722-002303	JACK-USB;4P/1C,AU30U,BLK,ANGLE,B TYPE		SA
#N/A	6902-000288	BAG PE;LDPE,T0.05,W250,L450,TRP,8,2-		SNA
#N/A	6902-000312	BAG PE;HDPE,T0.015,W1000,L900,TRP,8,4-		SNA
#N/A	6902-000732	BAG PE;LDPE,T0.1,W120,L200,TRP,0,0,-		SNA
#N/A	6902-000734	BAG PE;LDPE,T0.1,W140,L250,TRP,-,-,-		SNA
#N/A	JB68-00073A	LABEL(R)-BAR CODE;SF-3000,PY,38X6.5,T0.1		SNA
#N/A	JB68-00916A	LABEL RATING-BLANK;SF-340,SEC,TETRON,0.0		SNA
#N/A	JC02-00052A	TONER-MAGENTA;CLP-300,SAM-79GZ-K1,MAGENT		SNA
#N/A	JC02-00053A	TONER-CYAN;CLP-300,SAC-79GZ-K1,CYAN,8.5?		SNA
#N/A	JC02-00055A	TONER-YELLOW;CLP-300,SAY-79GZ-K1,YELLOW,		SNA
#N/A	JC39-00483A	CBF HARNESS-LSU;CLP-300,WIRE HARNESS,UL1		SA
#N/A	JC39-00484A	CBF HARNESS-SMPS;CLP-300,WIRE HARNESS,UL		SA
#N/A	JC39-00485A	CBF HARNESS-HVPS;CLP-300,WIRE HARNESS,UL		SA
#N/A	JC39-00486A	CBF HARNESS-BLDC;CLP-300,WIRE HARNESS,UL		SA
#N/A	JC39-00496A	CBF HARNESS-LSU_GND;CLP-300,WIRE HARNESS		SA
#N/A	JC46-00257A	S/W APPLICATION-CD;- ,CLP-300,PRT DRV,1.0		SNA
#N/A	JC61-01531A	STOPPER-M-PAPER REAR;CLP-300,ABS HB,T2.5		SNA
#N/A	JC61-01675A	SPRING ETC-AUGER;CLP-300,SUS304,iE1.2,-,S		SNA
#N/A	JC61-01676A	SPRING ETC-AUGER K;CLP-300,SWP-B,iE1.2,IS		SNA
#N/A	JC61-01677A	SPRING ETC-RETURN;CLP-300,SUS304,iE0.65,S		SNA
#N/A	JC62-00227A	SEAL-SHUTTER BOTTLE;CLP-300,POLYURETHANE		SNA
#N/A	JC62-00237A	SEAL-AGITATOR BOTTLE;CLP-300,PORON,BLACK		SNA
#N/A	JC62-00259A	SEAL-BOTTLE AUGER;CLP-300,PORON LE-20,-,		SNA
#N/A	JC62-00261A	SEAL-SHUTTER A;CLP-300,PE FOAM,-,T10,ID3		SNA
#N/A	JC63-00864A	SHIELD-P-SMPS;CLP-300,SECC,T1.0,109.7,19		SNA
#N/A	JC63-00872A	TRAY-M-EXT CASSETTE;CLP-300,ABS,T2.5,118		SNA
#N/A	JC63-00894A	COVER-INNER;CLP-300,ABS,T2.0,PI 56,-,HB,		SNA
#N/A	JC63-00895A	COVER-INNER BK;CLP-300,ABS,T2.0,R75,-,HB		SNA
#N/A	JC63-01046A	SHEET-AGITATOR;CLP-300,PET,T0.125,W25.5,		SNA
#N/A	JC63-01047A	SHEET-AGITATOR BK;CLP-300,PET,T0.125,W35		SNA
#N/A	JC64-00218A	SHUTTER-M-TONER BOTTLE;CLP-300,POM HB,-,		SNA
#N/A	JC64-00260A	HANDLE-M-BOTTLE;CLP-300,ABS,T5.9,W32.3,L		SNA
#N/A	JC64-00260B	HANDLE-BOTTLE Y;CLP-300,ABS,T5.4,-,L43.6		SNA
#N/A	JC64-00260C	HANDLE-BOTTLE M;CLP-300,ABS,T5.4,-,L43.6		SNA
#N/A	JC64-00260D	HANDLE-BOTTLE C;CLP-300,ABS,T5.4,-,L43.6		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
#N/A	JC66-01049A	GEAR-OPC DRIVE;CLP-300,POM,M0.6/M0.6,Z53		SA
#N/A	JC66-01095A	GEAR-AGITATOR BOTTLE;CLP-300,POM(DE8903)		SNA
#N/A	JC66-01139A	GEAR-AUGER A;CLP-300,POM,M0.6,Z89,T4.1,B		SNA
#N/A	JC66-01140A	GEAR-AUGER B;CLP-300,POM,M0.6,Z56,T4.1,W		SNA
#N/A	JC66-01141A	GEAR-AUGER Z15;CLP-300,POM,M0.6,Z15,T3.5		SNA
#N/A	JC66-01144A	SHAFT-AUGER;CLP-300,POM,L67,OD16,BLACK,-		SNA
#N/A	JC66-01145A	SHAFT-SPRING;CLP-300,POM,L16.5,OD11.5,BL		SNA
#N/A	JC66-01146A	SHAFT-AUGER K;CLP-300,POM,L70.3,OD10,WHI		SNA
#N/A	JC66-01301A	LEVER-COVER OPEN;CLP-300,PET+GF30,2.0,24		SNA
#N/A	JC67-00131A	TANK-M-TONER BOTTLE Y;CLP-300,ABS HB,-,P		SNA
#N/A	JC67-00134A	TANK-M-TONER BOTTLE BK;CLP-300,ABS HB,-,		SNA
#N/A	JC67-00135A	CAP-M-TONER BOTTLE;CLP-300,ABS HB,-,PI59		SNA
#N/A	JC67-00135B	CAP-TONER BOTTLE C;CLP-300,ABS HB,T10.87		SNA
#N/A	JC67-00135C	CAP-TONER BOTTLE M;CLP-300,ABS HB,T10.87		SNA
#N/A	JC67-00136A	CAP-M-TONER BOTTLE BK;CLP-300,ABS HB,-,P		SNA
#N/A	JC67-00137A	CAP-M-CRUM BOTTLE;CLP-300,ABS HB,-,PI52,		SNA
#N/A	JC67-00140A	CAP-M-CRUM BOTTLE BK;CLP-300,ABS(HF-0660		SNA
#N/A	JC67-00141A	CAP-M-CRUM BOTTLE C;CLP-300,ABS(HF-0660I		SNA
#N/A	JC67-00142A	CAP-M-CRUM BOTTLE M;CLP-300,ABS(HF-0660I		SNA
#N/A	JC67-00145A	CAP-M-TONER;CLP-300,PP,T4.5,ID16.7,OD19,		SNA
#N/A	JC67-00187A	CAP-BOTTLE Y;CLP-300,PET,T0.65,W64.53,L5		SNA
#N/A	JC67-00188A	CAP-BOTTLE BK;CLP-300,PET,T0.65,R39.1,L5		SNA
#N/A	JC68-00690A	MANUAL-(CARD)WARRANTY CARD;ML-1210,XEU,E		SNA
#N/A	JC68-01381B	LABEL(R)-PPID(DEVE);COMMON,DELL,ART,0.05		SNA
#N/A	JC68-01584A	LABEL(P)-BLANK 90*25;CLP-510,SEE,ART 100	D2120	SA
#N/A	JC68-01658A	LABEL(R)-POP;CLP-300,XAA,PASCAL,-,78,153		SNA
#N/A	JC68-10932A	LABEL(P)-BLANK(ML);ML-85,ART,70X60,G100,		SNA
#N/A	JC69-01014A	CUSHION-MAIN BOTTOM;CLP-300,EPP,87,502,4		SNA
#N/A	JC69-01014B	CUSHION-MAIN TOP;CLP-300,EPP,184,502,411		SNA
#N/A	JC69-01016A	CUSHION-CASSETTE IN;CLP-300,HONEY PAD,T3		SNA
#N/A	JC72-01384A	SPONGE-CAP BOTTLE;CLP-300,POLYURETHANE F		SNA
#N/A	JC72-01389A	SPONGE-CRUM;CLP-300,PORON,-,T2,W8,L12,-,		SNA
#N/A	JC92-01710A	PBA SUB-CRUM_Y;CLP-300,SEC,KOREA,CRUM_Y,		SNA
#N/A	JC92-01711A	PBA SUB-CRUM_M;CLP-300,SEC,KOREA,CRUM_M,		SNA
#N/A	JC92-01712A	PBA SUB-CRUM_C;CLP-300,SEC,KOREA,CRUM_C,		SNA
#N/A	JC92-01713A	PBA SUB-CRUM_K;CLP-300,SEC,KOREA,CRUM_K,		SNA
#N/A	JC94-01153A	PHANTOM AU JC92-01707B		SNA
#N/A	JC96-04001A	ELA UNIT-CONNECTOR;CLP-300,SEC,EXPORT,-,		SA
#N/A	JC96-04002A	ELA HOU-REGI EMP;CLP-300,KOREA,KOREA,REG		SA
#N/A	JC97-02638A	MEA UNIT-TERMINAL GND;CLP-300,SEC,EXPORT		SA
#N/A	JC97-02639A	MEA UNIT-FU TERMINAL;CLP-300,SEC,EXPORT,		SA
#N/A	JC97-02640A	MEA UNIT-REGIACTUATOR;CLP-300,SEC,EXPORT		SA
#N/A	JC97-02641A	MEA UNIT-EXIT ROLLER;CLP-300,SEC,EXPORT,		SA
#N/A	JC97-02642A	MEA UNIT-EMPTY ACT;CLP-300,SEC,EXPORT,-,		SA
#N/A	JC97-02647A	MEA UNIT-PICKUP ROLL;CLP-300,SEC,EXPORT,		SA
#N/A	JC97-02688A	MEA UNIT-PICK UP GEAR;CLP-300,SEC,WORLD,		SA
#N/A	0201-001162	ADHESIVE-CYA;LOCTITE403,NTR,1250,20G		SNA
#N/A	0201-001183	ADHESIVE-AA;ARON ALPHA #202F,NTR,100,20G		SNA
#N/A	0201-001235	ADHESIVE-TS;DEH-390D,RED,400,-		SNA
#N/A	0202-001459	SOLDER-CREAM;S3X58-M405,-,D20~38\$,96.5SS		SNA
#N/A	0205-001067	GREASE-GRAPHITE;NYOGEL 756G,HYDRO CARBON		SNA
#N/A	0401-000116	DIODE-SWITCHING;MMSD914T1,100V,200MA,SOD		SNA
#N/A	0407-000122	DIODE-ARRAY;KDS226,80V,300mA,C2-3,SOT-23		SA
#N/A	0501-000462	TR-SMALL SIGNAL;MMBT2907A,PNP,350mW,SOT-		SA
#N/A	0505-001326	FET-SILICON;SI2308DS,N,60V,2A,0.22OHM,1.		SA
#N/A	0601-001383	LED;ROUND,RED,3.0MM,700NM		SNA
#N/A	0601-001565	LED;SMD,GRN,1.6X0.8X0.6MM,520NM,1.6X0.8X		SA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
#N/A	0803-001393	IC-TTL;7407,BUFFER/DRIVER,SOP,14,150MIL,		SA
#N/A	0904-001989	IC-USC;ISP1582BS,-,HVQFN56,56P,8X8X0.85M		SA
#N/A	1105-001535	IC-DRAM;M12L128168A-7T,-,128MBIT,4X2MX16		SA
#N/A	1107-001302	IC-FLASH MEMORY;29LV800,1Mx8/512Kx16,TSO		SA
#N/A	1202-000164	IC-VOLTAGE COMP.;393,SOP,8P,150MIL,DUAL,		SA
#N/A	1203-001455	IC-POS.FIXED REG.;1117,DPAK,3P,265MIL,P		SA
#N/A	1203-002233	IC-RESET;XC61F,SOT-23,3P,-,PLASTIC,0.7/1		SNA
#N/A	1203-003739	IC-DC/DC CONVERTER;MVPG31,DFN,12P,4X3MM,		SNA
#N/A	1205-002339	IC-CLOCK GENERATOR;CY25811SC,SOIC,8P,150		SA
#N/A	2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608		SA
#N/A	2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608		SA
#N/A	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000105	R-CHIP;200Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608		SA
#N/A	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000475	R-CHIP;1Mohm,1%,1/10W,TP,1608		SA
#N/A	2007-000729	R-CHIP;300ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000965	R-CHIP;5.1Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-001056	R-CHIP;6.2Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-002901	R-CHIP;12.1Kohm,1%,1/10W,TP,1608		SA
#N/A	2007-007239	R-CHIP;31.6Kohm,1%,1/10W,TP,1608		SNA
#N/A	2007-008371	R-CHIP;280Kohm,1%,1/10W,TP,1608		SNA
#N/A	2007-008567	R-CHIP;15.4Kohm,1%,1/10W,TP,1608		SNA
#N/A	2011-001011	R-NET;10Kohm,5%,1/16W,L,CHIP,8P,TP,3.2x1		SNA
#N/A	2011-001261	R-NET;33ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.		SA
#N/A	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608		SA
#N/A	2203-000384	C-CER,CHIP;0.015nF,5%,50V,C0G,1608		SA
#N/A	2203-000426	C-CER,CHIP;0.018nF,5%,50V,C0G,1608		SA
#N/A	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,1608		SA
#N/A	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,2012		SA
#N/A	2203-005819	C-CER,CHIP;1000nF,+80-20%,16V,Y5V,-,1608		SNA
#N/A	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,2012		SA
#N/A	2203-006646	C-CER,CHIP;10000nF,10%,6.3V,X5R,2012		SA
#N/A	2401-000042	C-AL;100uF,20%,16V,GP,TP,6.3x7,5		SA
#N/A	2401-000207	C-AL;100uF,20%,50V,WT,TP,8x12,5		SNA
#N/A	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5		SA
#N/A	2402-001049	C-AL,SMD;10uF,20%,16V,GP,TP,3.3x3.3x5.4		SA
#N/A	2703-000300	INDUCTOR-SMD;1uH,10%,1608		SA
#N/A	2703-002055	INDUCTOR-SMD;2.2UH,20%,6363		SNA
#N/A	2901-001178	FILTER-EMI SMD;25V,2A,-,100000pF,2x1.25x		SA
#N/A	3301-000325	BEAD-SMD;60ohm,3.2x2.5x1.3mm,400mA,TP,,,		SNA
#N/A	3301-001122	BEAD-SMD;600ohm,1.6x0.8x0.8mm,TP,-,-		SNA
#N/A	3301-001240	BEAD-SMD;120ohm,1608,200mA,,393ohm/305MH		SNA
#N/A	3404-000165	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	D2158	SA
#N/A	3711-003409	HEADER-BOARD TO CABLE;BOX,3P,1R,2mm,STRA		SNA
#N/A	3711-003410	HEADER-BOARD TO CABLE;BOX,4P,1R,2mm,STRA		SNA
#N/A	3711-003411	HEADER-BOARD TO CABLE;BOX,5P,1R,2mm,STRA		SNA
#N/A	6044-001035	RING-ETC;ID2.2,OD6.4,T3,BLK,STS304		SNA
#N/A	6601-001384	BEARING-BALL;676ZZ,ID6,OD10,L3,GCr 15 +		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
#N/A	JC13-00031B	IC ASIC-CHORUSM;CHORUSM,SCX-4920N_VE,496		SA
#N/A	JC33-00018A	SOLENOID-TONER;-;CLP-300,DC24V,120SÜj¼10SN		SNA
#N/A	JC39-00036A	CBF HARNESS-OPE GND;SF-5100,#18,UL 1007,		SA
#N/A	JC39-00487A	CBF HARNESS-OPE;CLP-300,WIRE HARNESS,UL1		SA
#N/A	JC39-00490A	WIRE HARNESS-WASTE_T;CLP-300,WIRE HARNES		SA
#N/A	JC39-00492A	CBF HARNESS-PTL;CLP-300,WIRE HARNESS,UL1		SNA
#N/A	JC39-00494A	CBF HARNESS-REGI_EMT;CLP-300,WIRE HARNES		SA
#N/A	JC39-00495A	CBF HARNESS-EXIT;CLP-300,WIRE HARNESS,UL		SA
#N/A	JC39-00577A	CBF HARNESS-DEVE_ITB;CLP-300,WIRE HARNES		SNA
#N/A	JC39-00580A	CBF HARNESS-DEVE_HOME;CLP-300,WIRE HARNE		SA
#N/A	JC41-00300A	PCB MAIN-GOGH_GDI;CLP-300,FR-4,6L,-,1.6T		SNA
#N/A	JC60-00014A	FLANGE-M-DRUM OPC;CLP-300,PC(LF1025),W11		SNA
#N/A	JC60-00015A	SPACER-M-DR G;CLP-300,KL4540,-,ID60.1,OD		SNA
#N/A	JC60-00019A	SPACER-BLADE ITB;CLP-300,SUM22,L2.8,ID2.		SNA
#N/A	JC61-01120B	PLATE-CRUM;CLP-300,C5210P,0.15,W3,L5.2,-		SNA
#N/A	JC61-01158A	PLATE-M-KNOCK_UP;ML-1610,HIPS HB,T2,W80,	K5002	SA
#N/A	JC61-01281A	BRACKET-P-BAR_PICK_UP;ML-1610,SECC,T1.0,		SNA
#N/A	JC61-01466A	FRAME-M-T2 BASE;CLP-300,PC+ABS,-,HB,BLAC		SNA
#N/A	JC61-01467A	PLATE-P-T2 GROUND;CLP-300,C5210P 1/2H TA		SNA
#N/A	JC61-01468A	GUIDE-P-T2 OUTPUT;CLP-300,SECC,T0.6,-,22		SNA
#N/A	JC61-01469A	HOLDER-M-LOCATE SHAFT;CLP-300,POM (M90-4		SNA
#N/A	JC61-01470A	GUIDE-P-T2 INPUT;CLP-300,SECC,T0.6,-,230		SNA
#N/A	JC61-01492A	FRAME-M-LEFT OPC;CLP-300,ABS+GF20%,-,-,B		SNA
#N/A	JC61-01493A	FRAME-M-RIGHT OPC;CLP-300,ABS+GF20%,-,-,		SNA
#N/A	JC61-01496A	HOUSING-M-CLEANING OPC;CLP-300,ABS GF 20		SNA
#N/A	JC61-01500A	BRACKET-P-CLEANING ITB;CLP-300,SECC,1.6T		SNA
#N/A	JC61-01501A	PLATE-P-EARTH OPC;CLP-300,C5210P,T0.2,ID		SNA
#N/A	JC61-01508A	FRAME-M-DEVE YELLOW;CLP-300,ABS+GF20%,GR		SNA
#N/A	JC61-01509A	FRAME-M-DEVE MAGENTA;CLP-300,ABS+GF20%,G		SNA
#N/A	JC61-01510A	FRAME-M-DEVE CYAN;CLP-300,ABS+GF20%,GR40		SNA
#N/A	JC61-01511A	FRAME-M-DEVE BLACK;CLP-300,ABS+GF20%,GR4		SNA
#N/A	JC61-01512A	HOLDER-M-DEVE YELLOW L;CLP-300,ABS+GF20%		SNA
#N/A	JC61-01516A	GUIDE-M-DEVE;CLP-300,ABS+GF20%,GR4020,22		SNA
#N/A	JC61-01518A	PLATE-P-SUPPLY ROLLER;CLP-300,SUS 301-CS		SNA
#N/A	JC61-01519A	PLATE-P-DEVE ROLLER;CLP-300,SUS 301-CSP		SNA
#N/A	JC61-01520A	FRAME-M-DEVE MAIN;CLP-300,ABS GF20%,GR-4		SNA
#N/A	JC61-01526A	GUIDE-M-BUSH IDL ITB R;CLP-300,POM M90-4		SNA
#N/A	JC61-01527A	HOLDER-P-SEAL DEVE L;CLP-300,SUS301-CSP		SNA
#N/A	JC61-01528A	HOLDER-P-SEAL DEVE R;CLP-300,SUS301-CSP		SNA
#N/A	JC61-01529A	HOLDER-M-CRUM;CLP-300,ABS(XR-409),T2.0,W		SNA
#N/A	JC61-01561A	HOLDER-M-DEVE ROLLER;CLP-300,POM M90-44,		SNA
#N/A	JC61-01562A	GUIDE-M-DRIVE ITB;CLP-300,POM(M90-44),-,		SNA
#N/A	JC61-01572A	HOLDER-M-SHAFT CLUTCH;CLP-300,POM,T1.5,D		SA
#N/A	JC61-01573A	HOLDER-SUPPORT;CLP-300,ABS,T14.5,W26.5,L		SNA
#N/A	JC61-01576A	BUSH-SHAFT;CLP-300,POM,ID3.0,OD4.5,T3.5,		SNA
#N/A	JC61-01669A	GUIDE-M-SENSOR L;CLP-300,PS,T10.29,W11.7		SNA
#N/A	JC61-01670A	GUIDE-M-SENSOR R;CLP-300,PS,T10.29,W11.7		SNA
#N/A	JC61-01671A	GUIDE-M-SENSOR BK R;CLP-300,PS,T10,W13.4		SNA
#N/A	JC61-01672A	GUIDE-M-SENSOR BK L;CLP-300,PS,T10,W13.4		SNA
#N/A	JC61-01673A	BLADE-CLEANING ITB;CLP-300,URETHANE,-,W1		SNA
#N/A	JC61-01684A	BLADE-SENSOR;CLP-300,PET FILM,-,W6.3*L9.		SNA
#N/A	JC61-01687A	SPRING ETC-LOCK;CLP-300,PW-2,PI1.3,-,-,L		SNA
#N/A	JC61-01700A	GUIDE-WASTE;CLP-300,PC,-,31,41,TRANSPARE		SNA
#N/A	JC61-01706A	STUD-GEAR ITB;CLP-300,SUM22L,-,-,-,OD6		SNA
#N/A	JC61-01750A	BRACKET-P_GUIDE PR;CLP-300,SUS,T1.0,W232		SNA
#N/A	JC61-01751A	GUIDE-P_PAPER PR;CLP-300,SUS304,T0.1,W21		SNA
#N/A	JC61-01753A	PLATE-_P-DEVE SUPPORT;CLP-300,STSC301-CS		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
#N/A	JC61-01762A	BRACKET-BLADE ITB;CLP-300,SUS 304,T0.8,W		SNA
#N/A	JC61-01775A	BRACKET-CAM BAR;CLP-300,SECC,T1.2,W4.5,L		SNA
#N/A	JC61-70929A	SPRING ETC-HV LARGE;ML-5000A,SUS304-WPB,		SA
#N/A	JC62-00211A	SEAL-DRUM OPC;CLP-300,URETHANE FILM,-,T0		SNA
#N/A	JC62-00215A	SEAL-SIDE DEVE;CLP-300,PORON LE20,BLACK,		SNA
#N/A	JC62-00216A	SEAL-BRACKET OPC;CLP-300,EPDM,-,T2.7,W3,		SNA
#N/A	JC62-00226A	SEAL-DOCTOR BLADE;CLP-300,EPDM,-,T4.0,W4		SNA
#N/A	JC62-00230A	SEAL-SIDE RIGHT OPC;CLP-300,POLYURETHANE		SNA
#N/A	JC62-00231A	SEAL-SIDE LEFT OPC;CLP-300,POLYURETHANE		SNA
#N/A	JC62-00234A	SEAL-DEVE BLOCK;CLP-300,POLYURETHANE,-,3		SNA
#N/A	JC62-00235A	SEAL-DEVE ROLLER;CLP-300,PET Film,-,0.07		SNA
#N/A	JC62-00236A	SEAL-DEVE FRONT;CLP-300,PET FILM,-,0.075		SNA
#N/A	JC62-00240A	SEAL-AUGER;CLP-300,PORON ,BLACK,T5.0,ID4		SNA
#N/A	JC62-00241A	SEAL-COVER DUCT;CLP-300,PE FOAM,-,T2.0,W		SNA
#N/A	JC62-00256A	SEAL-FRAME WASTE OPC;CLP-300,PORON LE-20		SNA
#N/A	JC62-00260A	SEAL-CAP CRUM;CLP-300,Polyurethane Foam(		SNA
#N/A	JC62-00262A	SEAL-WASTE;CLP-300,PE FORM,-,T3.0,W4,L13		SNA
#N/A	JC62-00269A	SEAL-COVER FRONT;CLP-300,PE FOAM,-,T2.0,		SNA
#N/A	JC62-00270A	SEAL-COVER BOTTOM;CLP-300,POLYURETHANE F		SNA
#N/A	JC62-00271A	SEAL-COVER DEV K;CLP-300,PE FOAM,-,T3.0,		SNA
#N/A	JC62-00272A	SEAL-LSU REAR;CLP-300,URETHAN FILM,NTR,T		SNA
#N/A	JC62-00273A	SEAL-DEVE ROLLER K;CLP-300,PET FILM,-,T0		SNA
#N/A	JC62-00274A	SEAL-SIDE GAP OPC;CLP-300,POLYURETHAN FO		SNA
#N/A	JC62-00275A	SEAL-BLADE;CLP-300,POLYURETHANE,-,T3.0,W		SNA
#N/A	JC62-00279A	SEAL-SENSOR BK;CLP-300,FLOCKING(DOBIRU),		SNA
#N/A	JC62-00280A	SEAL-SENSOR Y;CLP-300,FLOCKING(DOBIRU),B		SNA
#N/A	JC62-00306A	SEAL-CAP DUCT;CLP-300,FLOCKING,-,T0.5,W8		SNA
#N/A	JC62-00307A	SEAL-SENSOR;CLP-300,FLOCKING,-,T0.5,W13.		SNA
#N/A	JC62-00308A	SEAL-DOCTOR BLADE S;CLP-300,EPDM,-,T2.0,		SNA
#N/A	JC62-00320A	SEAL-WASTE F;CLP-300,PE FOAM,GRAY,2.0T,W		SNA
#N/A	JC62-00321A	SEAL-WASTE R;CLP-300,PE FOAM,GRAY,2.0T,w		SNA
#N/A	JC62-00324A	SEAL-WASTE B;CLP-300,POLY-URETHANE(SHL),		SNA
#N/A	JC62-00341A	SEAL-WASTE EXIT;CLP-300,PORON LE-20 + PE		SNA
#N/A	JC62-00342A	SEAL-SIDE CLN OPC;CLP-300,POLYURETHANE F		SNA
#N/A	JC62-00343A	SEAL-SENSOR TOP;CLP-300,EPDM,-,T2.5,W4,L		SNA
#N/A	JC63-00853A	COVER-M-TONER BOTTLE;CLP-300,ABS HB HF-0		SNA
#N/A	JC63-00858A	COVER-M-WASTE OPC;CLP-300,ABS,T2,W15.8,L		SNA
#N/A	JC63-00883A	COVER-M-WASTE;CLP-300,PC(141R),T2.0,W77,		SNA
#N/A	JC63-00897A	COVER-M-WIRE;CLP-300,ABS,T2.0,W18.9,L133		SNA
#N/A	JC63-00898A	COVER-M-DEVE Y;CLP-300,ABS HF0660I,T1.5,		SNA
#N/A	JC63-00899A	COVER-M-DEVE M;CLP-300,ABS HF0660I,T1.5,		SNA
#N/A	JC63-00900A	COVER-M-DEVE C;CLP-300,ABS HF0660I,T1.5,		SNA
#N/A	JC63-00901A	COVER-M-DEVE K;CLP-300,ABS HF0660I,T1.5,		SNA
#N/A	JC63-01048A	SHEET-COVER HARNESS;CLP-300,PC,T0.125,W4		SNA
#N/A	JC63-01086A	SHEET-WASTE;CLP-300,PET,T0.188,W24,L24,B		SNA
#N/A	JC63-01087A	SHEET-LSU COVER;CLP-300,PC,T0.38,W17,L23		SNA
#N/A	JC63-01164A	SHEET-HOUSING REAR;CLP-300,PC,T0.38,W11.		SNA
#N/A	JC64-00217A	HANDLE-M-UNIT;CLP-300,ABS,7.0T,50.5,130,		SNA
#N/A	JC64-00226A	BUTTON-M-SUPPORT;CLP-300,POM M90-44,ID7,		SNA
#N/A	JC64-00229A	HANDLE-LOCK;CLP-300,ABS,T34.26,W39.3,L83		SNA
#N/A	JC64-00276A	LOCKER-FRAME;CLP-300,PC,BLK,-,-,-		SNA
#N/A	JC66-00494A	GEAR-OPC ROLL CLEAN_Z18;CLP-500,POM,M0.8		SNA
#N/A	JC66-00604A	ROLLER-CHARGER CLEANING;CLP-500,URETHAN+		SNA
#N/A	JC66-00720A	SHAFT-P-CORE;ML-1750,SECC 1.2T,203,-,-,-	O1068	SA
#N/A	JC66-00830A	ROLLER-M-EXIT FR;ML-1610,TEFLON,6.5,L22.		SNA
#N/A	JC66-01058A	LATCH-M-CLUTCH SPRING;CLP-300,POM,T1.2,D		SNA
#N/A	JC66-01069A	GEAR-CLUTCH DEVE CAM;CLP-300,POM,M0.6,Z2		SA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
#N/A	JC66-01072A	SHAFT-LOCATE;CLP-300,SUM 22+NI(COATING),		SNA
#N/A	JC66-01074A	LEVER-M-RELEASE R;CLP-300,ABS+GF20%,T2.0		SNA
#N/A	JC66-01075A	LEVER-M-RELEASE L;CLP-300,ABS+GF20%,T2.0		SNA
#N/A	JC66-01081A	GEAR-RDCN T2 DRIVE;CLP-300,POM,M0.8/M0.8		SA
#N/A	JC66-01084A	SHAFT-M-AUGER OPC;CLP-300,ABS+GF20%,L250		SNA
#N/A	JC66-01086A	GEAR-DRUM OPC;CLP-300,PC(LF1025),M0.6,Z9		SNA
#N/A	JC66-01088A	SHAFT-OPC;CLP-300,SUS303,L284.5,OD6,-,-,		SNA
#N/A	JC66-01090A	GEAR-DEVE ROLLER;CLP-300,POM DE8903,M0.6		SNA
#N/A	JC66-01091A	GEAR-SUPPLY ROLLER;CLP-300,POM DE588P,M0		SNA
#N/A	JC66-01092A	SHAFT-M-AUGER SUPPLY;CLP-300,ABS GF20% G		SNA
#N/A	JC66-01093A	SHAFT-M-BELT;CLP-300,POM(M90-44),24.8,¥ÖS		SNA
#N/A	JC66-01094A	LEVER-M-WASTE SENSOR;CLP-300,ABS,3.0T,18		SNA
#N/A	JC66-01099A	SHAFT-M-AUGER TONER Y;CLP-300,ABS GF20%		SNA
#N/A	JC66-01100A	SHAFT-M-AUGER TONER M;CLP-300,ABS GF20%		SNA
#N/A	JC66-01101A	SHAFT-M-AUGER TONER C;CLP-300,ABS GF20%		SNA
#N/A	JC66-01102A	SHAFT-M-AUGER TONER K;CLP-300,ABS GF20%		SNA
#N/A	JC66-01103A	LEVER-M-LOCK DEVE FRAME;CLP-300,ABS,2.0T		SNA
#N/A	JC66-01107A	GEAR-AUGER SUPPLY;CLP-300,POM DE588P,M0.		SNA
#N/A	JC66-01108A	GEAR-IDLE;CLP-300,POM DE8903,M0.6/M0.5,Z		SNA
#N/A	JC66-01109A	GEAR-AUGER TONER;CLP-300,POM DE588P,M0.5		SNA
#N/A	JC66-01113A	GEAR-IDLE M08Z30R;CLP-300,POM (M90-44),M		SNA
#N/A	JC66-01114A	GEAR-DRIVE Z20;CLP-300,POM (DE588P),M0.8		SNA
#N/A	JC66-01115A	GEAR-WORM AGITATOR;CLP-300,POM (M90-44),		SNA
#N/A	JC66-01116A	GEAR-IDLE M08Z30L;CLP-300,POM (M90-44),M		SNA
#N/A	JC66-01117A	GEAR-IDLE ITB;CLP-300,POM (M90-44),M0.8,		SNA
#N/A	JC66-01121A	LEVER-M-T2 HOLDER R;CLP-300,ABS+GF20%,T2		SNA
#N/A	JC66-01122A	LEVER-M-T2 HOLDER L;CLP-300,ABS+GF20%,T2		SNA
#N/A	JC66-01123A	GEAR-AUGER OPC;CLP-300,POM (M90-44),M0.5		SNA
#N/A	JC66-01124A	GEAR-IDLE OPC;CLP-300,POM (M90-44),M0.6/		SNA
#N/A	JC66-01125A	ROLLER-DEVE;CLP-300,NBR+ECO,OD10,L295.3,		SNA
#N/A	JC66-01126A	ROLLER-SUPPLY;CLP-300,Fur Brush,OD9.15,L		SNA
#N/A	JC66-01127A	DRUM-OPC;CLP-300,AL,ID58,OD60,L248,-,-		SNA
#N/A	JC66-01129A	ROLLER-DRIVE ITB;CLP-300,AL+EPDM,OD29.7,		SNA
#N/A	JC66-01130A	ROLLER-IDLE ITB;CLP-300,AL,OD30,L234,-,-		SNA
#N/A	JC66-01137A	GEAR-DRIVE ITB;CLP-300,PC(LF1025),M0.5,Z		SNA
#N/A	JC66-01142A	ROLLER-SLIDE A;CLP-300,POM,L10,OD10.2,BL		SNA
#N/A	JC66-01143A	ROLLER-SLIDE B;CLP-300,POM,L20,OD14,BLAC		SNA
#N/A	JC66-01230A	SHAFT-DEVE FRAME;CLP-300,SUM22L+NI,L28.4		SNA
#N/A	JC66-01295A	SHAFT-AUGER SUPPLY Y;CLP-300,ABS GF20% G		SNA
#N/A	JC66-01298A	SHAFT-AUGER SUPPLY C;CLP-300,ABS GF20% G		SNA
#N/A	JC66-01299A	SHAFT-AUGER SUPPLY M;CLP-300,ABS GF20% G		SNA
#N/A	JC66-01302A	SHAFT-HOUSING PICK UP;CLP-300,SUM22+NI C		SNA
#N/A	JC67-00143A	CAP-M-WASTE BOTTLE;CLP-300,LDPE(MB9205),		SNA
#N/A	JC67-00144A	TANK-M-WASTE;CLP-300,ABS(TR557A),T2.0,W1		SNA
#N/A	JC67-00162A	CAP-DUCT;CLP-300,CR,T0.7,17.8,19.7,-,-		SNA
#N/A	JC67-00191A	CAP-DUMMY;CLP-300,ABS,-,-,L31.4,DM GRAY,		SNA
#N/A	JC70-10232A	IPR-PLATE SAW;ML-80,SUS304 CSP 1/2H,-,T0	O1099	SA
#N/A	JC70-50901A	IPR-IPM BUSHING DEV R;ML-5000,BRONZE,-,D		SNA
#N/A	JC71-00009A	NPM-BUSHING DEV R;ML-6060,BRONZE,D7*12,-		SNA
#N/A	JC72-00382B	PMO-BUSHING FEED;ML-1710,POM(DERLIN 8903	O1102	SA
#N/A	JC72-01004A	PMO-IDLE KNOCK UP MP;ML-2150,POM,BLK,-,M	P0041	SA
#N/A	JC72-41105A	PMO-BUSHING DEV;ML-5000,POM,NTR,-,-,-,-		SNA
#N/A	JC73-00217A	RUBBER-BELT YELLOW;CLP-300,NBR,0.7T,-,22		SNA
#N/A	JC73-00220A	RUBBER-BELT BLACK;CLP-300,NBR,0.7T,-,22,		SNA
#N/A	JC73-00221A	RUBBER-BELT WASTE OPC;CLP-300,NBR,L335.9		SNA
#N/A	JC74-00011A	MPR-PAD KNOCK UP MP;ML-6060A,CR+CORK,10*	O1109	SA
#N/A	JC92-01708A	PBA SUB-DEVE JOINT;CLP-300,SEC,KOREA,DEV		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
#N/A	JC92-01721A	PBA SUB-REGI_EMPTY;CLP-300,SEC,KOREA,REG		SNA
#N/A	JC92-01722A	PBA SUB-WASTE_R;CLP-300,SEC,KOREA,WASTE_		SNA
#N/A	JC94-01119A	0		SNA
#N/A	JC94-01120A	0		SNA
#N/A	JC94-01121A	0		SNA
#N/A	JC94-01122A	0		SNA
#N/A	JC94-01123A	0		SNA
#N/A	JC94-01124A	0		SNA
#N/A	JC94-01125A	0.1		SNA
#N/A	JC94-01126A	0.1		SNA
#N/A	JC94-01129A	0.1		SNA
#N/A	JC94-01130A	0.2		SNA
#N/A	JC97-01788C	MEA UNIT-CLUTCH TONER;CLP-300,-,WORLD,M0		SNA
#N/A	JC97-02620A	MEA UNIT-SUS BLADE;CLP-300,SEC,WORLD,-,-		SNA
#N/A	JC97-02628A	MEA UNIT-T2 ROLLER;CLP-300,SEC,WORLD,-,-		SA
#N/A	JC97-02643A	MEA UNIT-BLADE OPC;CLP-300,SEC,EXPORT,-,		SNA
#N/A	JC97-02644A	MEA UNIT-CHARGE OPC;CLP-300,SEC,EXPORT,-		SNA
#N/A	JC97-02694A	MEA-GUIDE IDL ITB;CLP-300,SEC,WORLD,-,-,		SNA
#N/A	0407-000101	DIODE-ARRAY;DA204K,20V,100mA,C2-3,SOT-23		SA
#N/A	0501-000457	TR-SMALL SIGNAL;MMBT2222A,NPN,350mW,SOT-		SA
#N/A	0601-000003	LED;ROUND,RED/GRN,3.1MM,650/563NM,3.8X5.		SA
#N/A	0601-001138	LED-IR;ROUND,5mm,150mW,4V,950nm,BK		SNA
#N/A	0601-001908	LED;ROUND,RED,3MM,630NM,3.2X4.6MM		SNA
#N/A	0603-001021	PHOTO TR;NPN,20V,5V,20mA,75mW,TP		SA
#N/A	1103-001366	IC-EEPROM;34C02,2KBIT,256X8BIT,SOP,8P,5X		SNA
#N/A	2001-000831	R-CARBON;510OHM,5%,1/4W,AA,TP,2.4X6.4MM		DNA
#N/A	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216		SA
#N/A	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000730	R-CHIP;300ohm,5%,1/4W,TP,3216		SA
#N/A	2007-001003	R-CHIP;510ohm,5%,1/4W,TP,3216		SNA
#N/A	2201-000021	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,		SA
#N/A	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,1608		SA
#N/A	2203-000626	C-CER,CHIP;0.022nF,5%,50V,C0G,1608		SA
#N/A	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,1608		SNA
#N/A	2404-001102	C-TA,CHIP;33uF,20%,16V,GP,TP,6032,-		SNA
#N/A	3711-002001	HEADER-BOARD TO CABLE;BOX,20P,2R,2MM,STR		SA
#N/A	JC39-00491A	CBF HARNESS-WASTE_R;CLP-300,WIRE HARNESS		SNA
#N/A	JC41-00171C	PCB-PTL (1LAYER);SCX-4100,FR-1,1,-,1.6T,		SNA
#N/A	JC41-00201A	PCB-TONER_TX;CLP-500,FR-1,1L,-,1.2,15*10		SNA
#N/A	JC41-00296A	PCB SUB-ITB_JOINT;CLP-300,FR-1,1L,-,1.6T		SNA
#N/A	JC41-00298A	PCB SUB-TONER_CRUM;CLP-300,FR-4,2L,-,1.6		SNA
#N/A	JC41-00299A	PCB SUB-PANEL;CLP-300,FR-1,1L,-,1.6T,45*		SNA
#N/A	JC61-01471A	HOLDER-M-T2 ROLLER R;CLP-300,POM (M90-44		SNA
#N/A	JC61-01507A	PLATE-P-DOCTOR BLADE;CLP-300,SECC,1.2T,3		SNA
#N/A	JC61-01525A	GUIDE-M-BUSH IDL ITB L;CLP-300,POM M90-4		SNA
#N/A	JC61-01545A	BRACKET-P-CLEANING OPC;CLP-300,SECC,T1.2		SNA
#N/A	JC61-01575A	BLADE-P-DOCTOR;CLP-300,SUS,NATURAL,223*1		SNA
#N/A	JC61-01668A	COLLAR-M-CLUTCH;CLP-300,POM,ID11.4,OD13.		SNA
#N/A	JC61-01674A	BLADE-CLEANING OPC;CLP-300,POLY URETHANE		SNA
#N/A	JC66-00828A	ROLLER-CHARGE;ML-1610,NBR+ECO,D12,L230,N		SNA
#N/A	JC66-01073A	GEAR-T2 ROLLER;CLP-300,POM,M0.8,Z28,-,WH		SA
#N/A	JC66-01098A	GEAR-CHARGE;CLP-300,POM (M90-44),M0.8,Z1		SNA
#N/A	JC66-01104A	ROLLER-TRANSFER;CLP-300,SUM22+HYBRID FOA		SNA
#N/A	JC66-01224A	GEAR-WORM CLUTCH;CLP-300,POM,M0.8,Z2,-,W		SNA

SA : SERVICE AVAILABLE SNA : SERVICE not AVAILABLE DNA : DELIVERY not AVAILABLE

Drawer#	SEC-Code	Description & Specification	Location	Service
#N/A	JC70-00525A	HUB-M-CLUTCH SPRING;CLP-300,POM,-,D13.4,		SNA
#N/A	JC71-10322B	NPR-EARTH OPC;- ,ML-80,C5210P-1/2H,T0.2,-		SNA
#N/A	JC94-01118A	0		SNA
#N/A	JC94-01127A	0.1		SNA
#N/A	JC94-01128A	0.1		SNA
#N/A	0402-001189	DIODE-RECTIFIER;M4,400V,1A,TS-1,TP		SA
#N/A	1001-000170	IC-ANALOG SWITCH;MC14051BD,SPDT CMOS,SOP		SA
#N/A	1404-001141	THERMISTOR-NTC;5.6Kohm,5%,3200K,2.1mW/C,		SNA
#N/A	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM		SA
#N/A	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608		SA
#N/A	2007-000839	R-CHIP;39ohm,5%,1/10W,TP,1608		SA
#N/A	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608		SNA
#N/A	2007-007233	R-CHIP;61.9ohm,1%,1/10W,TP,1608		SNA
#N/A	2007-007550	R-CHIP;3.16Kohm,1%,1/10W,TP,1608		SNA
#N/A	2007-007613	R-CHIP;121ohm,1%,1/10W,TP,1608		SNA
#N/A	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,1608		SA
#N/A	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608		SA
#N/A	3711-005561	CONNECTOR-HEADER;BOX,5P,1R,2MM,SMD-S,SN,		SA
#N/A	3711-005596	HEADER-BOARD TO CABLE;BOX,3P,1R,2MM,SMD-		SNA
#N/A	3711-005851	HEADER-BATTERY;NOWALL,2P,1R,4.25MM,BATTE		SA
#N/A	3711-006032	CONNECTOR-HEADER;BOX,2P,1R,2MM,SMD-A,SN,		SNA
#N/A	JC41-00133A	PCB-SENSOR;SCX-5100,FR-1,1L,-,1.6T,22X12		SNA
#N/A	JC41-00202A	PCB-TONER_RX;CLP-500,FR-1,1L,-,1.2,15*10		SNA
#N/A	JC41-00295A	PCB SUB-DEVE_JOINT;CLP-300,FR-1,1L,-,1.6		SNA