




6. Exploded Views & Parts List

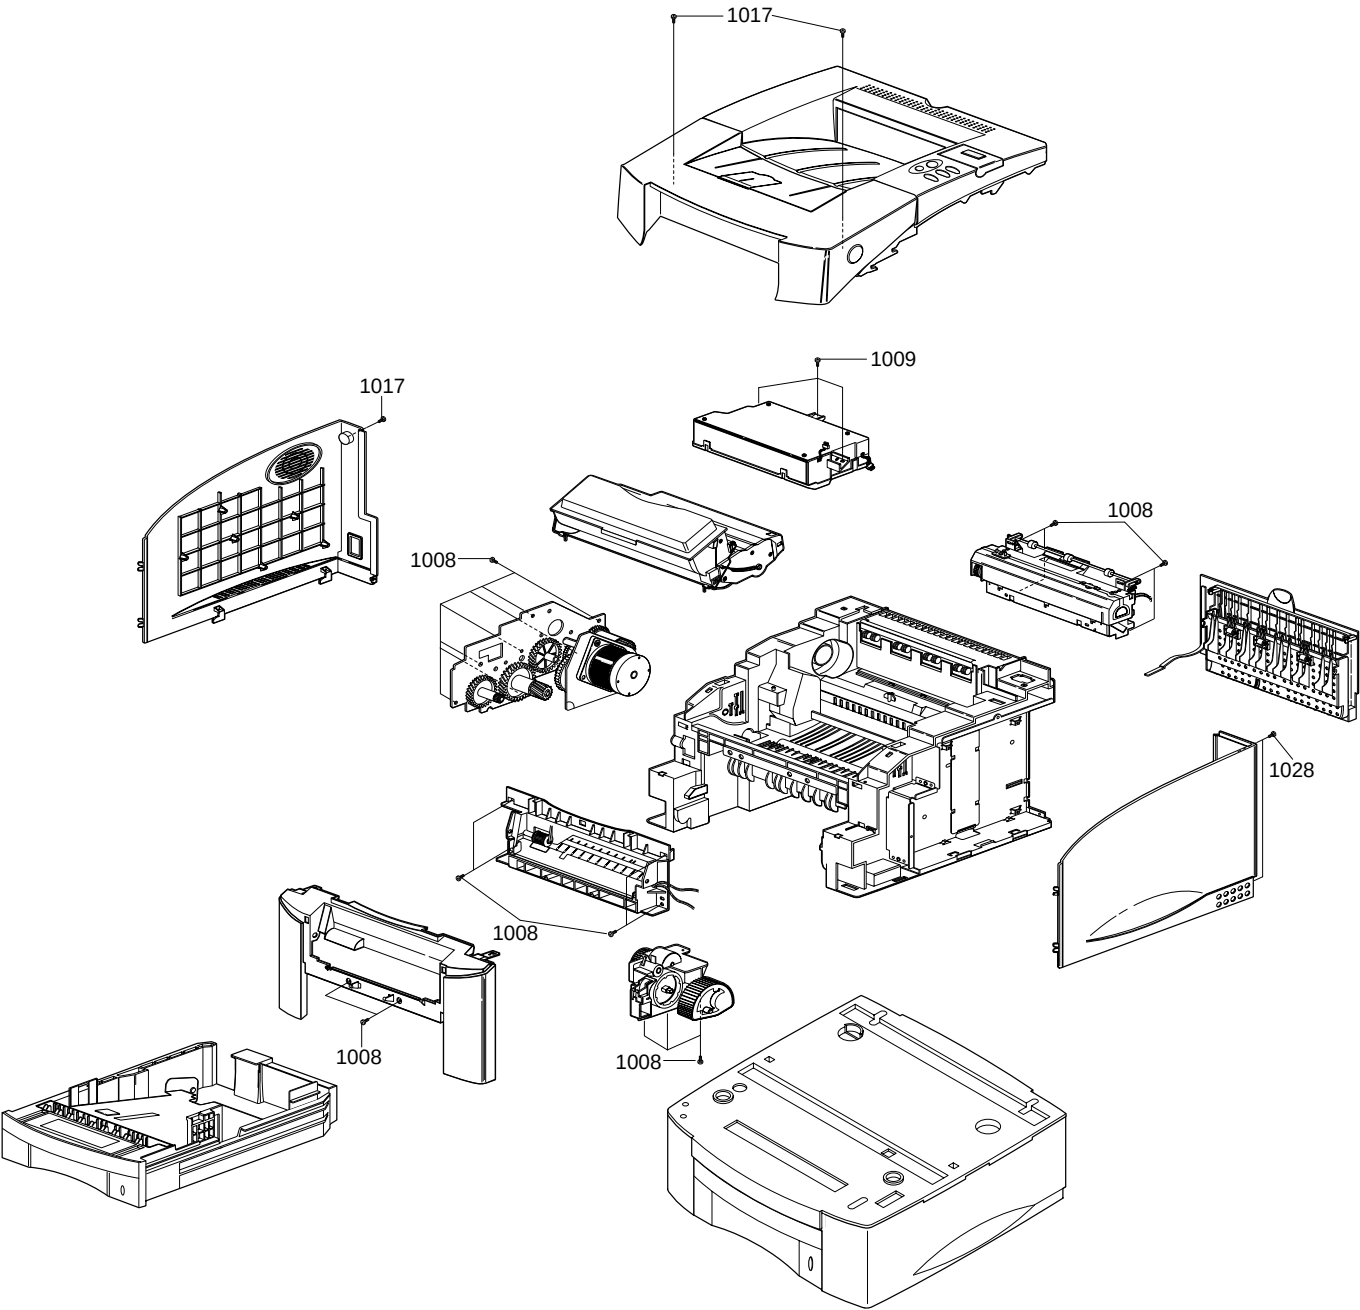


6-1-1. Cover Ass'y

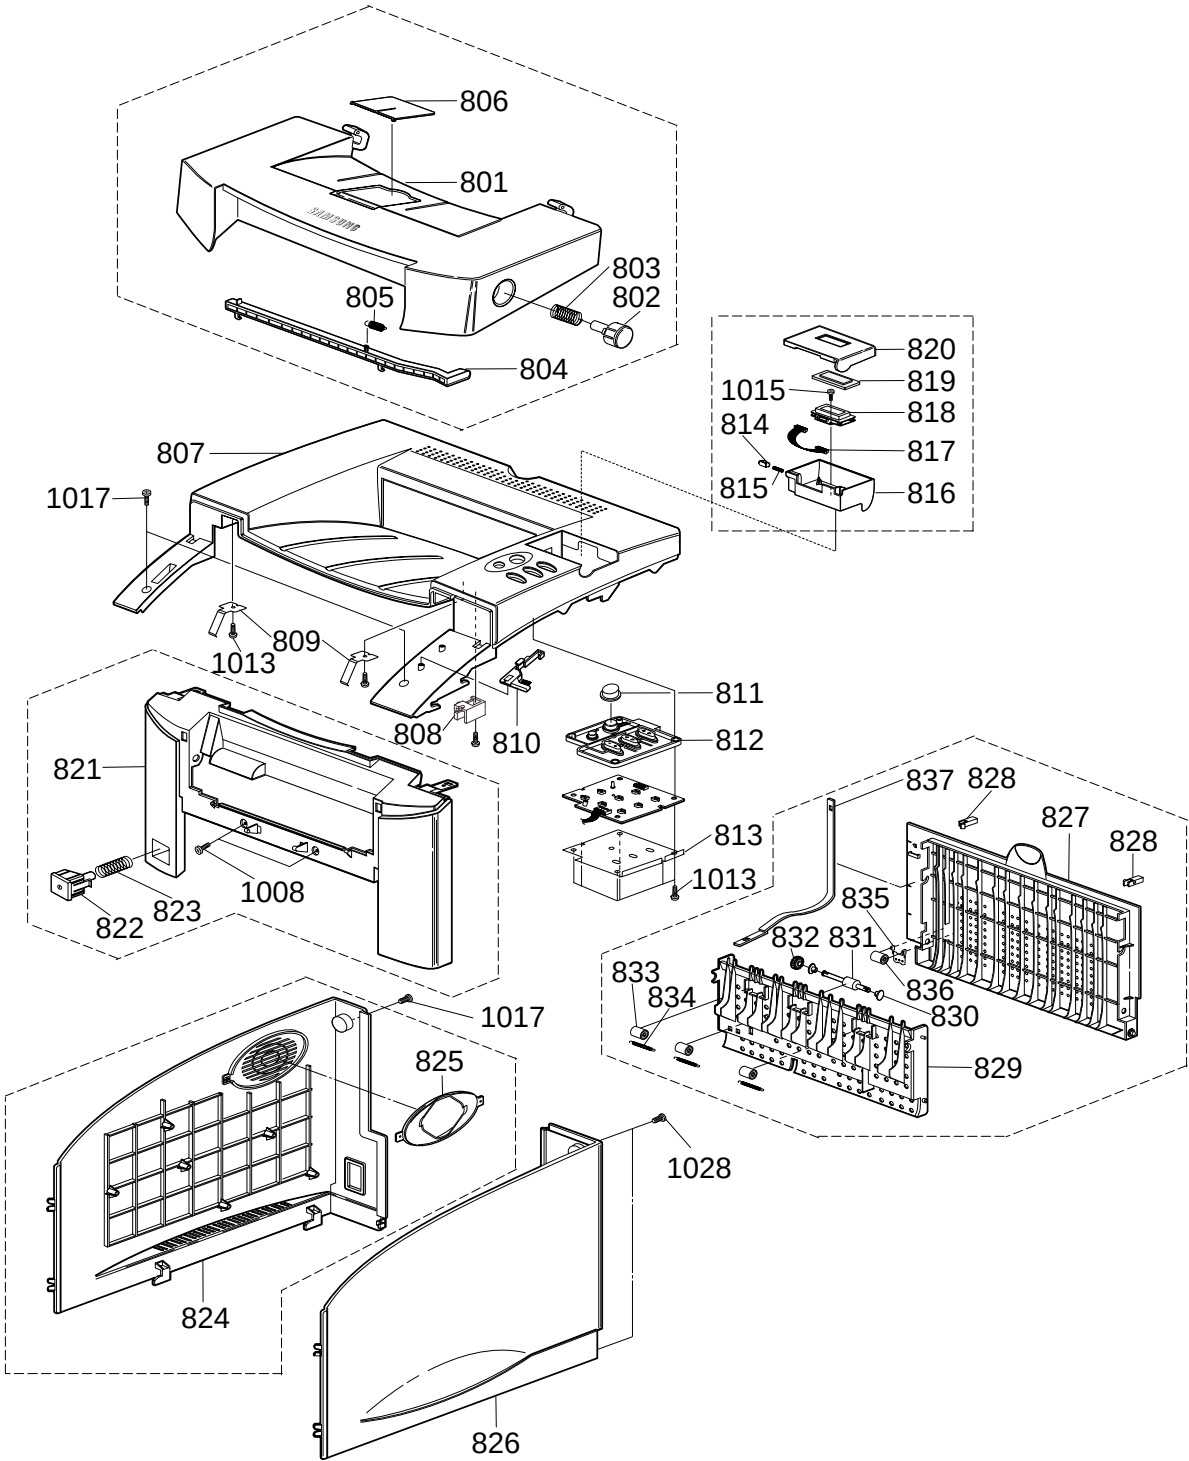

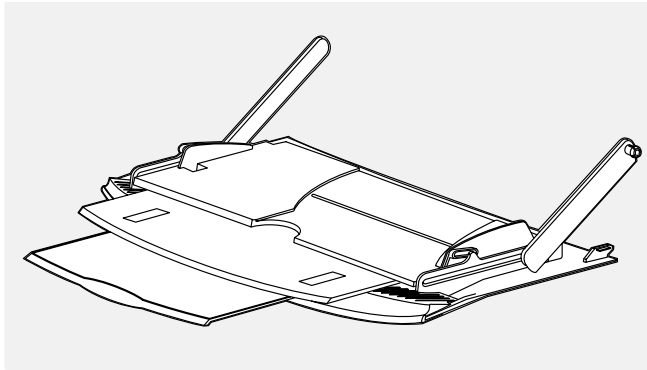

850

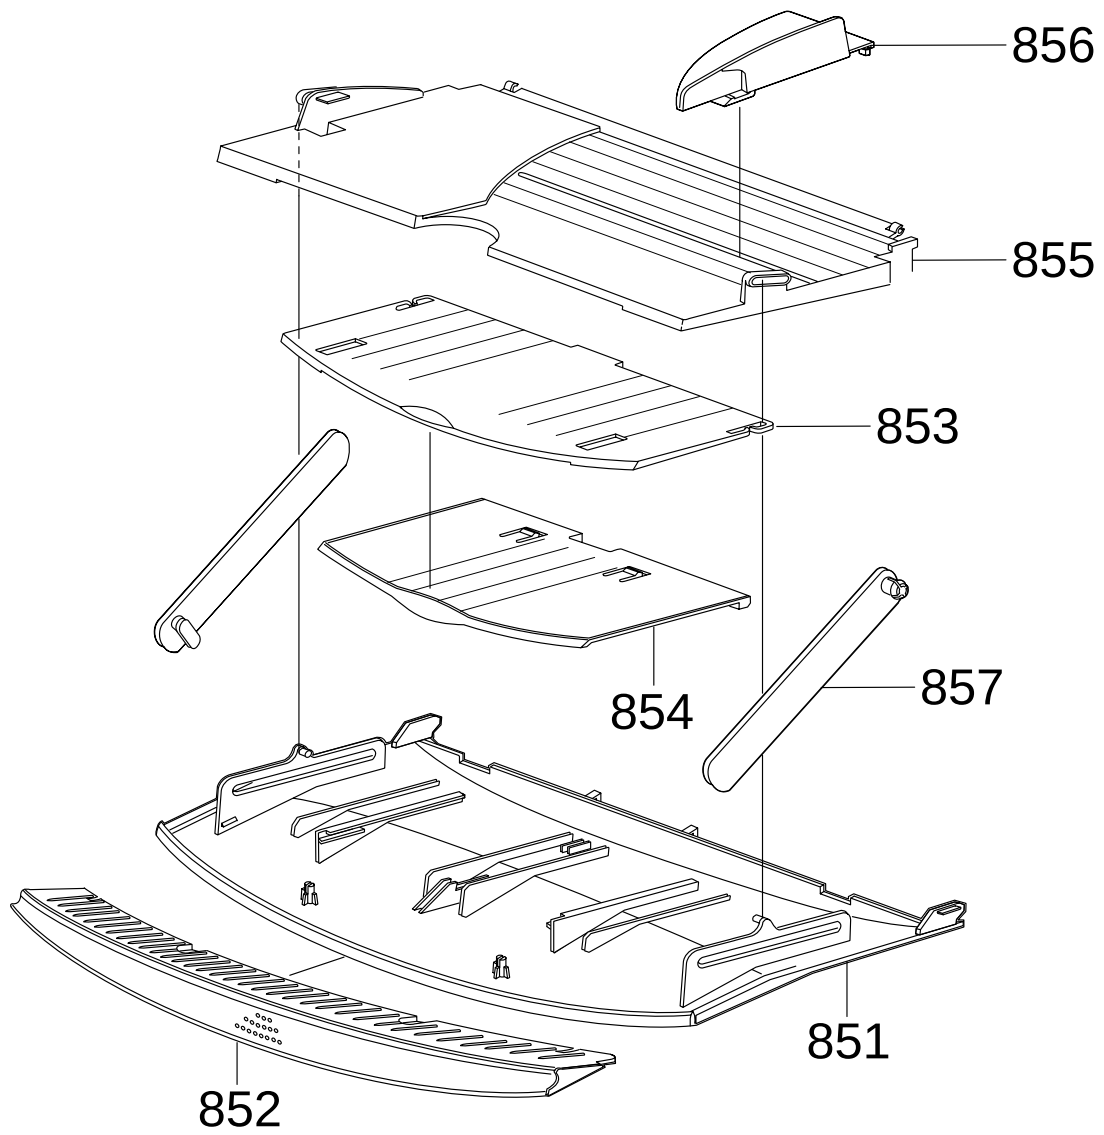

856

855

853

854

857

851

852

6-1-2. Cover Ass'y Parts list

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	ELA HOU-COVER TOP	JC96-01060B	1		ASSY	O
2	MEA RACK-COVER OPEN	JC97-01027A	1		ASSY	X
3	PMO-COVER OPEN	JC72-40938A	1	801	HIPS HB IVORY	X
4	PMO-BUTTON OPEN	JC72-40946A	1	802	HIPS HB IVORY	X
5	SPRING CS	6107-000117	1	803	SUS 304WPB	X
6	PMO-HOOK OPEN	JC72-40959A	1	804	ABS G/F 20	X
7	SPRING ES	JC61-00006A	1	805	SUS 304 WPB	X
8	PMO-STACKER	JC72-41063A	1	806	HIPS HB IVORY	X
9	ELA HOU-COVER MAIN	JC96-01061B	1		ASSY	X
10	PMO-COVER TOP	JC72-40939B	1	807	HIPS HB IVORY	X
11	PMO-STOPPER-HINGE	JC72-40960A	1	808	POM WHITE	X
12	SPRING HINGE	JC70-10959A	1	809	SUS 304 0.4T	X
13	PMO-CLEANER LSU	JC72-41022A	1	810	ABS+NYLON	X
14	PMO-KEY ONLINE	JC72-41003B	1	811	ACRYL	O
15	PBA SUB DISP-PNL&LCD	JC92-00995A	1		ASSY	O
16	PBA SUB DISP-PANEL	JC92-00972A	1	812		O
17	INSULATOR PANEL	JC70-11062A	1	813	PVC	O
18	LCD LOCKER	JC72-41241A	1	814	POM WHITE	O
19	S/P LCD LOCKER	JC61-70949A	1	815		O
20	PMO-HOUSING PANEL	JC72-40951A	1	816		O
21	HARNESS-LCD	JC39-40533A	1	817		O
22	PBA SUB DIST-LCD	JC92-00973A	1	818		O
23	WINDOW PANEL	JC72-41002A	1	819	ACRYL	O
24	PMO-HOUSING PANEL(ML-7000)	JC72-40950D	1	820	HIPS HB IVORY	O
25	PMO-HOUSING PANEL(ML-7000P)	JC72-40950E	1	820	HIPS HB IVORY	O
26	PMO-HOUSING PANEL(ML-7000N)	JC72-40950F	1	820	HIPS HB IVORY	O
27	PMO-HOUSING PANEL(QwikLaser 7000)	JC72-40950G	1	820	HIPS HB IVORY	O
28	PMO-HOUSING PANEL(QwikLaser 7000P)	JC72-40950H	1	820	HIPS HB IVORY	O
29	PMO-HOUSING PANEL(QwikLaser 7000N)	JC72-40950J	1	820	HIPS HB IVORY	O
30	MEA RACK-COVER FRONT	JC97-01024A	1		ASSY	O
31	PMO-COVER FRONT	JC72-40937A	1	821	HIPS HB IVORY	X
32	PMO-BUTTON POWER	JC72-40947A	1	822	HIPS HB IVORY	X
33	SPRING CS	6107-000117	1	823	SUS 304 WPB	X
34	MEA RACK-COVER LEFT	JC97-01025A	1		ASSY	O
35	PMO-COVER LEFT	JC72-40940A	1	824	HIPS HB IVORY	X
36	PMO-AIRDUCT	JC72-40955A	1	825	HIPS HB IVORY	X
37	PMO-COVER RIGHT	JC72-40941A	1	826	HIPS HB IVORY	O
38	MEA-RACK-COVER REAR	JC97-01026A	1		ASSY	O
39	PMO-COVER REAR	JC72-40942 A	1	827	HIPS HB IVORY	X
40	SPRING REAR	JC61-70947A	2	828	SUS 301 T=0.5	X
41	GUIDE-INNER, DP	JC70-10934A	1	829	ABS BLK	X
42	BEARING-LARGE, DP	JC72-40978A	1	830	POM BLK(CE-20)	X
43	ROLLER-REAR, DP	JC73-30908A	1	831	SUS304+CR	X
44	GEAR-DUPLEX	JC66-40912A	3	832	POM WHT	X
45	ROLLER-EXIT, ID	JC70-10938A	3	833	POM WHT	X
46	SPRING-FEED, ROLL	JC61-70943A	1	834	SUS 0.5 28M/M	X
47	SPRING-UPP, DP	JC70-10940A	1	835	SUS 304 T=0.2	X
48	ROLLER-UPPER, DP	JC72-40981A	1	836	POM WHT	X
49	PMO-STRIFE	JC72-41004A	1	837	NYLON66(WHITE)	O
50	MEA RACK-COVER TRAY	JC97-01037A	1	850	ASSY	O
51	PMO-COVER TRAY	JC72-40944A	1	851	HIPS HB IVORY	X
52	PMO-COVER COLOR	JC72-40945A	1	852	HIPS HB BLUE	X
53	PMO-SUBTRAY FIRST	JC72-40953A	1	853	HIPS HB IVORY	X
54	PMO-SUBTRAY SECOND	JC72-40954A	1	854	HIPS HB IVORY	X
55	PMO-TRAY-MP	JC72-40958A	1	855	HIPS HB IVORY	X
56	PMO-SIDEGUIDE-TRAY	JC72-40956A	1	856	HIPS HB IVORY	X
57	PMO-LINK-TRAY	JC72-40957A	1	857	HIPS HB IVORY	X
58	SCREW-TAPTITE	6003-000002	2	1008	PWH, +, B, M3, L10, CB SWRCH18A	O
59	SCREW-TAPTITE	6003-000119	10	1013	BH, +, B, M3, L8, CB SWRCH18A	O
60	SCREW-TAPTITE	6003-001065	3	1017	PWH, +, B, M3, L12, NI SWRCH18A	O
61	SCREW-TAPTITE	6001-000745	2	1028	PWH, +, M3, L12, NI, PLT, MSWR1	O


6-2-2. Frame Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	MEA RACK-GUIDE T/R	JC97-01033A	1		ASSY	X
2	PMO-GUIDE TRANSFER	JC72-40996A	1	101	SECC 0.5T+PC	X
3	PMO-HOLDER SAW	JC72-41213A	1	102	PC BLK	X
4	IPR-PLATE SAW	JC70-10232A	1	103	SUS 304 CSP 1/2H 0.1T	X
5	PPR-INSULATOR G/TR	JC72-10913A	1	104	PVC SHEET 0.3T	X
6	CABLE CLAMP	6502-000130	1	1026	DAWS-NA, NTB	X
7	ELA HOU-SOCKET CON	JC96-01071A	1	105	ASSY	O
8	MEA RACK-ROLLER TR	JC79-01094A	1		ASSY	O
9	MEA RACK-HOLDER TR L	JC97-01020A	1		ASSY	O
10	PMO-HOLDER TR L	JC72-41018A	1	106	PC	O
11	PMO-BUSH	JC72-40228A	1	107	POM(BLACK)	O
12	SPRING-T/R L	JC61-70961A	1	108	SUS 304	O
13	MEA RACK-HOLDER TR R	JC97-01021A	1		ASSY	O
14	PMO-HOLDER TR R	JC72-41019A	1	109	PC	O
15	PMO-BUSH	JC72-40228A	1	107	POM(BLACK)	O
16	SPRING-T/R R	JC61-70906A	1	108-1	SWP	O
17	SPRING PLATE TR	JC61-70203A	1	202-1	SUS 0.2T	O
18	MEC-ROLLER TRANSFER	JC75-10954A	1	110	CONDUCLIVE NTR	O
19	GEAR-TRANSFER	JC66-40947A	1	111	POM(NW-02)	O
20	RING-E	6044-000127	1	1022	ID5.0, OD11.0, T0.6, STS304	O
21	ELA HOU-BRKT C/O	JC96-01054A	1		ASSY	O
22	MEA RACK-BRKT C/O	JC97-01155A	1	112	SECC 1.6T	O
23	PMO-ACTUATOR C/O	JC72-41001A	1	113	POM(BLK)	O
24	SPRNG-C/O COM	JC61-70905A	1	115	SUS 304 WPB	O
25	SPRING C/O	JC61-70904A	1	116	SUS 304 WPB	O
26	ELA CBF PWR-5VSWITCH	JC96-01144A	1	117	SWITCH MICRO 5V	O
27	ELA CBF PWR-24VSWITCH	JC96-01145A	1	118	SWITCH MICRO 24V	O
28	CABLE-TIE	6501-000004	1	1025	DA-80 T1 W2.5 L80NTR, NYLON66	O
29	SCREW	6001-001144	2	1006	BH, H, M2, L15, ZPC(YEL), WRCH18A	O
30	MEA RACK-GUIDE DEV L	JC97-01018A	1		ASSY	O
31	PMO-GUIDE DEV L	JC72-40991A	1	119	POM(BLK)	O
32	SPRING-PS, G/DEV	JC61-70001A	1	120	SUS 304 CSP 1/2H 0.2T	O
33	MEA RACK-GUIDE DEV R	JC97-01019A	1		ASSY	O
34	GUIDE-DEV R	JC72-40991A	1	121	POM(BLK)	O
35	SPRING-PS, G/DEV	JC61-70001A	1	120	SUS 304 CSP 1/2H 0.2T	O
36	ELA HOU-FUSER TER	JC96-01142A	1		ASSY	O
37	CBF-HARNESS FUSING	JC39-40522A	1	122	VL3122 255/245 WHITE	O
38	IPR-TERMINAL FU	JC70-10961A	1	123	C5210P	O
39	PMO-HOUSING TERMINAL	JC72-41010A	1	124	ABS GF 20%,BLK,VO	O
40	CABLE-TIE	6501-000004	1	1025	DA-80, T1, W2.5, L80, NTR, NYLON66	O
41	ELA HOU-CST SENSOR	JC96-01143A	1		ASSY	O
42	IPR-BAKT PAPER SIZE	JC70-10921A	1	125	SECC 1.6T	X
43	IPR-PUSH PLATE SPRING	JC70-10928A	1	126	SUS 304 CSP 1/2H 0.3T	X
44	SECREW MACHINE M3×4	6001-000125	3	1001	BH+B M3 L4 ZPC(YEL), SM20C	X
45	PBA SUB-CASSETTE	JC92-00981A	1	127	ASSY	O
46	ELA HOU-PTL	JC96-01141A	1	-	ASSY	O
47	PMO-COVER QUENCHING	JC72-41021A	1	128	PC	O
48	PBA SUB-PTL	JC92-00979A	1	129	PTL,217X9	O
49	ELA HOU-SMPS	JC96-01063A	1		ASSY(110V)	O
50	IPR-SHIELD SMPS	JC70-10944A	1	130	SECC 1.0T	X
51	SMPS-110V	JC44-10502A	1	131	110V	X
52	PMO-CAP WIRE SUPPORT	JC72-40949A	1	132	POM(BLK)	X
53	SPRING-LINK WIRE	JC61-70920A	1	133	SUS 304 WPB	X
54	PMO-CAP POWER	JC72-40948A	1	134	HIPS HB(BLK)	X
55	ELA HOU-SMPS	JC96-01064A	1		ASSY(220V)	O
56	IPR-SHIELD SMPS	JC70-10944A	1	130	SECC 1.0T	X
57	SMPS-220V	JC44-10503A		135	220V	X
58	PMO-CAP WIRE SUPPORT	JC72-40949A	1	132	POM(BLK)	X

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
59	SPRING-LINK WIRE	JC61-70920A	1	133	SUS 304 WPB	X
60	PMO-CAP POWER	JC7-40948A	1	134	HIPS HB(BLK)	X
61	IPR-PLATE CST GUIDE	JC70-10924A	1	136	SUS 304 CSP 1/2H 0.5T	O
62	PMO-ACTUATOR FEED	JC72-40984A	1	137	ABS HB(BLK)	O
63	IPR-BAR CROSS BOTTOM	JC70-10958A	2	138	SECC 1.2T	O
64	IPR-BRKT DUST	JC70-10951A	1	139	SUS 304 CSP 1/2H 0.2T	O
65	PMO-CAP ACT FEED	JC72-40988A	1	140	ABS HB(BLK)	O
66	PMO-CAP TERMINAL TR	JC72-40990A	1	141	ABS HB(BLK)	O
67	PMO-CAP WIRE	JC72-40987A	1	142	ABS HB(BLK)	O
68	PMO-CAP WIRE CST	JC72-40989A	1	143	HBS HB(BLK)	O
69	PMO-CAP WIRE LSU	JC72-41024A	1	144	ABS VO(BLK)	O
70	IPR-COVER PCB	JC70-10953A	1	145	SECC 0.6T	O
71	FOOT-RUBBER	JC61-40001A	2	146	RUBBER(CR70),GREY	O
72	PMO-FRAME BASE	JC72-40983A	1	147	ABS GF 20%	X
73	IPR-GROUND-BRKT GEAR	JC70-10946A	1	148	SUS 304 CSP 1/2H 0.2T	O
74	IPR-GROUND FUSER	JC70-10948A	1	149	SUS 304 CSP 1/2H 0.2T	O
75	IPR-GND BAR BOTTOM	JC70-10967A	1	150	SECC 0.6T	O
76	IPR-GROUND DU BRKT	JC70-10955A	1	151	SUS 304 CSP 3/4H 0.2T	O
77	IPR-GROUND EXIT ROLL	JC70-10956A	1	152	SUS 304 CSP 1/2H 0.2T	O
78	IPR-GROUND MP CON	JC70-10966A	1	153	SUS 304 CSP 1/2H 0.2T	O
79	IPR-GROUND OPC	JC70-10949A	1	154	SUS 301 CSP 1/2H 0.3T	O
80	IPR-GND SHIELD SMPS	JC70-10965A	1	155	SUS 304 CSP 1/2H 0.2T	O
81	IPR-GUIDE P/FRONT	JC70-10964A	1	156	SECC 1.0T	O
82	MEA RACK- GUIDE P/UPP	JC97-01228A	1		ASSY	O
83	ANT1-BRUSH	JG75-10004A	1	204-1		O
84	IPR-GUIDE P/UPPER	JC70-10974A	1	157	SECC 1.0T	O
85	PMO-HINGE GUIDE R	JC72-40995A	1	158	POM (CE-20)	O
86	PMO-HOLDER G/PAPER	JC72-41020A	1	159	POM	O
87	SPRING-CS, P10.4 D3/D5.8	6107-00010A	3	160	SUS 304 WPB	O
88	ICT-TERMINAL HV	JC70-40909A	3	161	SWRCH	O
89	IPR TERMINAL T/R	JC70-10950A	1	162	SUS 304 CSP 1/2H 0.2T	O
90	GEAR-EXIT/L	JC66-40210A	1	163	POM(RAL 4032)	O
91	GEAR-EXIT/U	JC66-40211B	4	164	POM(NW-02)	O
92	SPRING CLUTH	JB61-70922A	2	183	MJC-810L	O
93	GEAR-P/UP DRIVE	JC66-40219A	2	165	POM(M90-44)	O
94	GEAR-DP, IDLE	JC66-40911A	1	166	POM(NW-02)	O
95	IPR-GROUND FUSER R	JC70-10982A	1	167	SUS 304 CSP 1/2H 0.2T	O
96	PMO-REAR CST ALIGN	JC72-41236A	1	168	POM(BLK)	O
97	IPR-PLATE GRIP CST	JC70-11038A	1	169	SECC 2.0T	O
98	IPR-FRAME ICU	JC70-10920A	1	170	SECC T0.6	O
99	IPR-SHIELD ICU	JC70-10930A	1	171	SECC T0.6	O
100	IPR-BRT ICU	JC70-10931A	1	172	SPCC T1.0+ZN(WHITE)PLATE	O
101	IPR-BKT NETWORK	JC70-10932A	1	173	SPCC T0.6+ZN(WHITE)PLATE	O
102	IPR-BKT SERIAL	JC70-10933A	1	174	SPCC T0.6+ZN(WHITE)PLATE	O
103	FAN-DC	3103-001047	1	175	24VDC 60MA	O
104	CBF HARNESS-LSU	JC39-40523A	1	176	UL 1061, 320	O
105	CBF HARNESS-CASSETTE	JC39-40524A	1	177	UL 1061, 250	O
106	CBF HARNESS-SCF 1	JC39-40527A	1	178	UL 1061, 100	O
107	CBF HARNESS-JOINT	JC39-40529A	1	179	UL 1061, 360	O
108	CBF HARNESS-VIDEO	JC39-40530A	1	180	UL 1061, 330	O
109	CBF HARNESS-SMPS	JC39-40532A	1	181	UL 1061, 450	O
110	CBF HARNESS-MP GND	JC39-40538A	1	182	UL 1007, 210	O
111	CABLE TIE	6501-000004	1	102. 5	DA-80,T1,W2.5,L80,NTR, NYLON66	O
112	PMO-GUIDE EXIT FD	JC72-41009A	1	183	PC+ABC BLK	O
113	MEC-BRUSH	JC75-10923A	1	184	AL+THUNDERON	O
114	MEA RACK EXIT ROLLER	JC97-01034A	1		ASSY	O
115	PMO-ROLLER FD R	JC72-41008A	4	185	POM BLK	X

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
116	PMO-ROLLER FD R	JC72-41007A	4	186	POM BLK	X
117	PMO-HOLDER EXIT ROLL	JC72-41006A	4	187	PC BLK	X
118	SPRING-EXIT ROLL FD	JC61-70911A	4	188	SUS304 WPB	X
119	GEAR-EXIT	JC66-40209A	1	189	POM WHT	O
120	SUA, BEARING-EXIT, F/DOW	811-492007AA	1	190	POM BLK	O
121	BEARING-E/UP R	JC66-10904A	1	191	POM CE-20 BLK	O
122	RCT-ROLLER EXIT FD	JC73-30906A	1	192	EPDM+SUM24L	O
123	DPLX GND	JC39-40537A	1	193		O
124	SCREW-TAPTITE	6003-000119	1	1013	BH, +,B,M3,L8,CBLACK,SWA18A	O
125	PMO-COVER EXIT	JC72-40943A	1	194	ABS HB IVORY	O
126	PMO-LEVER STACKING 1	JC72-41188A	1	195	PC+ABS C7425	O
127	PMO-LEVER STACKING 2	JC72-41228A	1	196	PC+ABS C7425	O
128	PMO-LEVER SEESAW	JC72-41189A	1	197	BC BLK	O
129	PHOTO INTERRUPTER	0604-001095	1	198	TR, 90%, 150MW, DIP-4, ST	O
130	HOLDER ACT KEY	JC72-41235A	1	199	ABS. GF20, BLK, HB	O
132	SPRING C/O	JC61-70904A	1	116	SUS 304 WPB	O

6-3-1. Cassette Ass'y

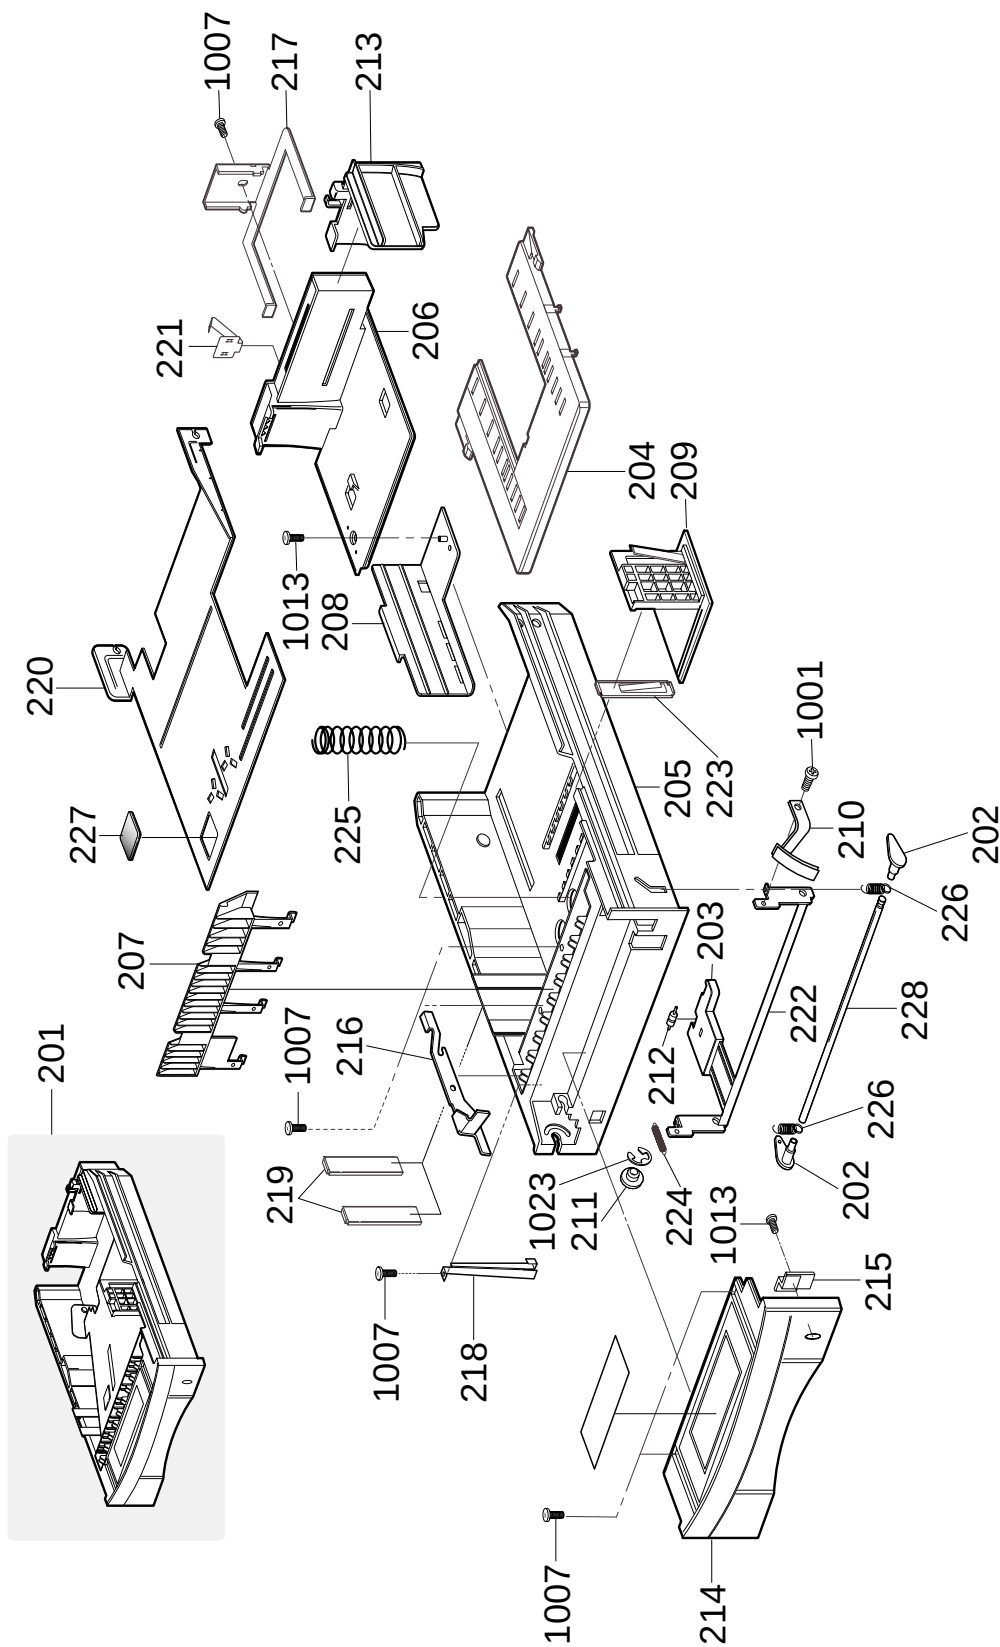


6-3-2. Cassette Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	MEA RACK-FEEDER CST	JC97-01023B	1	201	ASSY	O
2	PMO-BUSH K/UP	JC72-40961A	2	202	POM(WHITE)	X
3	PMO-CAP PLATE L/UP	JC72-40962A	1	203	POM(WHITE)	X
4	PMO-COVER GUIDE EXT	JC72-40936A	1	204	HIPS HB, C7425	X
5	PMO-FRAME CASSETTE	JC72-40963A	1	205	HIPS HB, C7425	X
6	PMO-GUIDE EXT CST	JC72-40964A	1	206	HIPS HB, C7425	X
7	PMO-GUIDE PAPER	JC72-40965A	1	207	HIPS HB, C7425	X
8	PMO-GUIDE PAPER SIZE	JC72-40966A	1	208	POM(WHITE)	X
9	PMO-GUIDE SIDE CST	JC72-40967A	1	209	HIPS HB(PANTONE 2715C)	X
10	PMO-LEVER PAPER	JC72-40972A	1	210	HIPS HB(PANTONE 021C)	X
11	PMO-LINK LEVER	JC72-40968A	1	211	POM(PANTONE 2715C)	X
12	PMO-ROLLER FD R	JC72-41008A	1	212	POM(BLK)	X
13	PMO-SIDE GUIDE EXT	JC72-40970A	1	213	HIPS HB(PANTONE 2715C)	X
14	PMO-SUB GUIDE CAST	JC72-40971A	1	214	HIPS HB	X
15	PMO-WINDOW PAPER	JC72-41039A	1	215	ACRYL	X
16	IPR-FINGER	JC70-10918A	1	216	SPCC 1.2T NI	X
17	IPR-GUIDE EXT LOCK	JC70-10919A	1	217	SPCC 1.2T ZN	X
18	IPR-GUIDE PAPER SCF	JC70-10922A	1	218	SUS 304 CSP 1/2H 0.3T	X
19	IPR-GUIDE PLT PAPER	JC70-10923A	2	219	SUS 304 CSP 1/2H 0.5T	X
20	IPR-PLATE KNOCK UP	JC70-10925A	1	220	SPCC 1.0T ZN	X
21	IPR-PLATE SPR LOCK	JC70-10926A	1	221	SUS 301 CSP 1/2H 0.3T	X
22	IPR-PLATE SUB K/UP	JC70-10927A	1	222	SECC 1.6T	X
23	IPR-SPR PLT G/SIDE	JC70-10929A	1	223	SUS 301 CSP 1/2H 0.2T	X
24	SPRING LEVER	JC61-70918A	1	224	SUS 304 WPB	X
25	SPRING PLATE K/UP	JC61-70917A	1	225	SUS 304 WPB	X
26	SPRING SUB PLATE	JC61-70919A	2	226	SUS 304 WPB	X
27	RPR-PAD CST	JC73-10910A	1	227	CORK T1.2 W24.6 L25.8	X
28	ICT-SHAFT SPR K/UP	JC70-40907A	1	228	SUM 24LAN	X
29	SCREW-MACHINE	6001-0001125	1	1001	BH, +, B, M3, L4, ZPC(YEL), SM20C	X
30	SCREW-TAPTITE	6003-000001	6	1007	PWH, +, B, M3, L10, NI, PLT, SWRCH18A	X
31	SCREW-TAPTITE	6003-000119	2	1013	BH, +, B, M3, L8, CBLACK, SWRCH18A	X
32	RING-E	6044-000129	1	1023	ID6, OD12, T0.8, ZPC(BLK), STSC	X

6-4-2. MP Tray Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	ELA HOU-MP TRAY	JC96-01055A	1		ASSY	O
2	PMO-FRAME MP	JC72-41025A	1	301	ABS G/F 20%, BLK, HB	X
3	BEARING PICK UP	JC66-10202A	2	302	POM CE20 BLK	X
4	PHOTO INTERRUPTER	0604-001095	1	303	TR, 90%, 150MW, DIP-4, ST	X
5	IPR-BKT SOLENOID MP	JC70-10971A	1	304	SPCC, T1, 6	X
6	SOLENOID MP	JC33-10002A	1	305	24VDC, 7.1W, 100HM, 24.3*	X
7	PMO-LIMIT SOLENOID	JC72-41029A	1	306	ABS, BLK, HB	X
8	SCREW TAPTITE	6003-000119	1	1013	BH, +, M3, L8, CBLACK, SWRCH18A	X
9	SCREW TAPTITE	6003-000213	2	1015	PWH, +, S, M3, L6, ZPC(YEL), SWRCH18	X
10	PMO-HOUSING P/UP MP	JC72-41028A	1	309	ABS, BLK, HB	X
11	RPR-RUBBER P/UP MP	JC73-10907A	1	310	EPDM, BLK	X
12	ICT-SHAFT PICK UP MP	JC70-40905A	1	311	SUM24L, PI6, NI	X
13	PMO-IDLE PICK UP MP	JC72-41027A	2	312	POM, WHT, HB	X
14	GEAR-CAM	JC66-40916A	1	313	POM, WHT, HB	X
15	RING-E	6044-000149	1	1024	ID4, OD9, I0.6, CBLACK, STSC304	X
16	PMO-BKT HOLDER MP	JC72-41031A	1	315	ABS, BLK, HB	X
17	PMO-HOLDER PAD MP	JC72-41030A	1	316	ABS, BLK, HB	X
18	RPR-FRICTION PAD MP	JC73-10909A	1	317	SILICON, 31*10.2*T1, NTR	X
19	SPRING F/P MP	JC61-70914A	1	318	SUS304 WPB, PI0.5, D3.5, L	X
20	SEREW TAPTITE	6003-000119	1	1013	BH, +, M3, L8, CBLACK, SWRCH18A	X
21	PMO-SUB GUIDE MP	JC72-41033A	1	320	ABS HB, BLK	X
22	PMO-ACTUATOR EMPTY	JC72-41032A	1	321	PC, BLK, HB	X
23	PMO-ACTUATOR PAPER	JC72-41239A	1	322	POM, BLK, HB	X
24	SCREW	6003-000119	2	1013	BH, +, B, M3, L8, CBLACK, SWRCH18A	X
25	IPR K/UP PLATE MP	JC70-10970A	1	324	SPCC, T1.2, ZN	X
26	RPR-PAD KNOCK UP MP	JC73-10906A	1	325	CR+CORK, 31*10.2*T1, NTR	X
27	PMO-BUSHING K/UP MP	JC72-41026A	1	326	POM, NAT, HB	X
28	SPRING KNOCK UP MP	JC61-70913A	1	327	SUS304 WPB, PI0.5, D4.5, L	X
29	POM-GUIDE RING	JC72-41238A	1	328	POM, BLK, HB	X
30	CBF HARENSS MP	JC39-40525A	1	329	UL 1061, 280MM, -, #26	X



6-5-1. Pick Up Ass'y

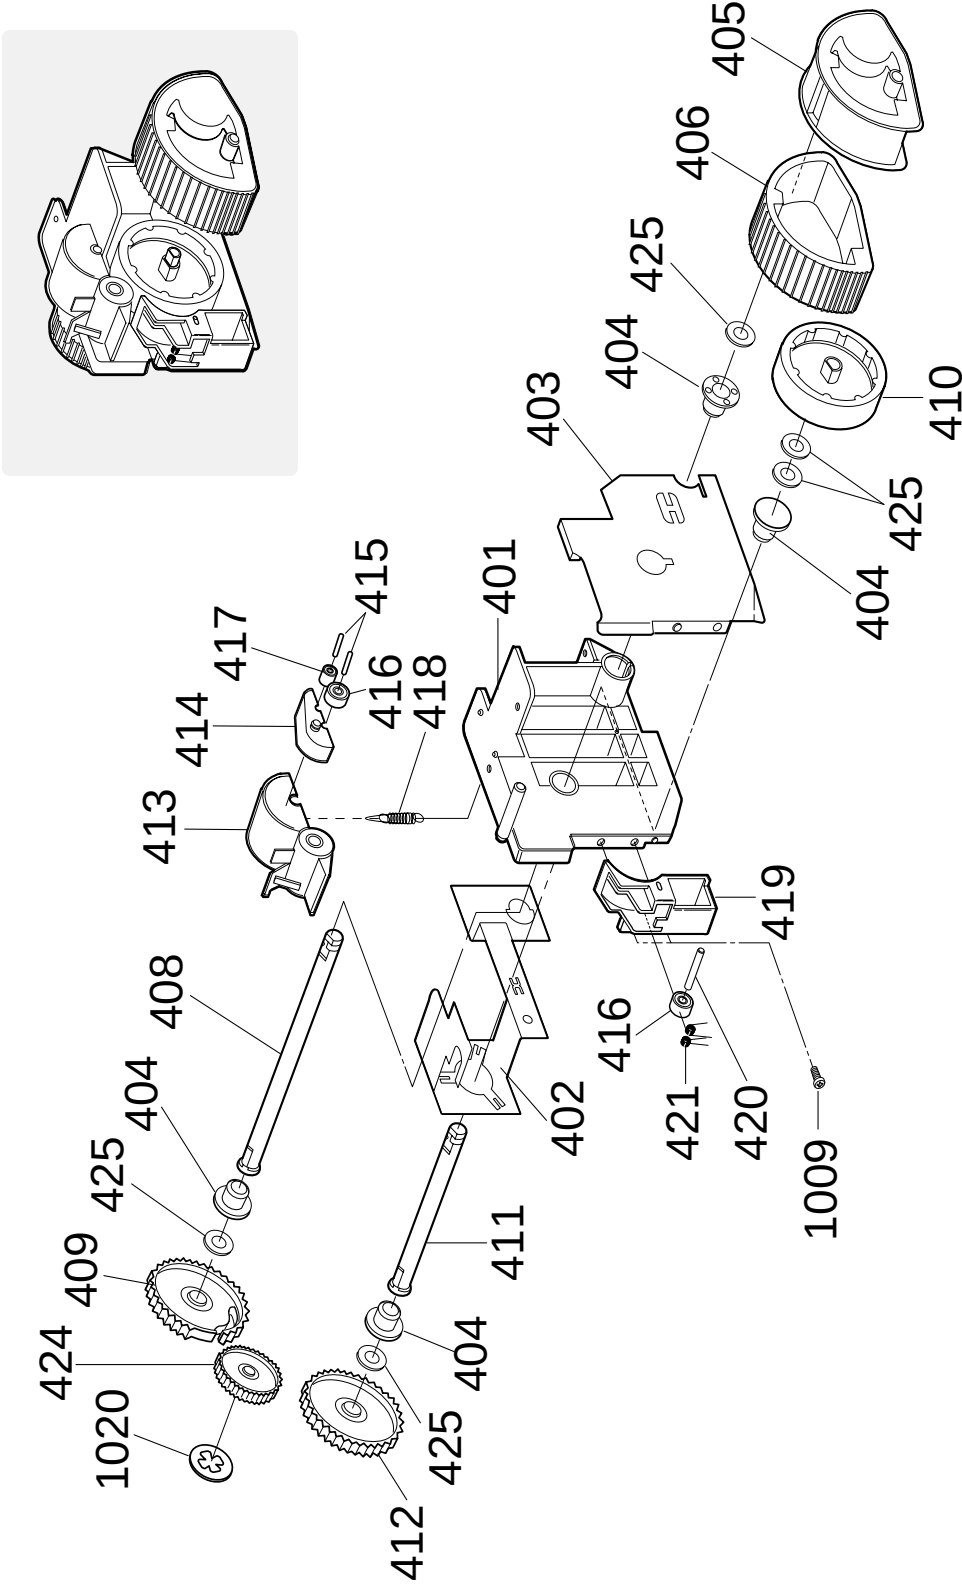

6-5-2. Pick Up Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	MEA PACK-PICK UP	JC97-01039A			ASSY	O
2	PMO-FRAME FEED	JC72-41034A	1	401	PC G/F 20%, BLK, HB	X
3	IPR-GROUND FEED	JC70-10976A	1	402	SUS304 CSP, T0.15	X
4	IPR-PAPER GUIDE FEED	JC70-10975A	1	403	SUS304 CSP, T0.2	X
5	BEARING PICK UP	JC66-10202A	4	404	POM	X
6	PMO-HOUSING PICK UP	JC72-41035A	1	405	ABS, BLK, HB	X
7	RPR-RUBBER PICK UP	JC73-10905A	1	406	EPDM, 25*20*T3, BLK	X
8	ICT-SUB SHAFT PICK UP	JC70-40908A	1	407	SUS304	X
9	ICT-SHAFT PICK UP	JC70-10231A	1	408	SUM24L, NI PLT	X
10	GEAR-PICK UP	JC66-40917A	1	409	POM(M90-44), WHT, 0.8, Z39	X
11	PMO-FEED ROLL DRIVE	JC72-41036A	1	410	POM+URETHANE, BLK, HB	X
12	IPR-SHAFT FEED	JC70-10230A	1	411	SUM24L, NI PLT	X
13	GEAR FEED	JC66-40918A	1	412	POM(NW-02), WHT, 0.8, Z43	X
14	PMO-HOLDER FEED SMA	JC72-41037A	1	413	POM G/F 20%, BLK, HB	X
15	PMO-SUB HOLDER FEED	JC71-40266A	1	414	POM, NTR	X
16	IPR-SHAFT FEED IDLE	JC70-10230A	1	415	SUM24L, NI PLT	X
17	PMO-ROLLER FEED L	JC72-41038A	2	416	ABS, BLK, HB	X
18	PMO-ROLLER FEED S	JC72-40262A	1	417	POM, NTR	X
19	SPRING FEED SMALL	JC61-70912A	1	418	SUS304, WPB, P0.5, D3.6, L1	X
20	PMO-HOLDER FEED L	JC72-41038A	1	419	ABS, BLK, HB	X
21	ICT-SHAFT IDLE LARGE	JC70-40906A	1	420	SUM24L, %W3, NI	X
22	SPRING FEED GARGE	JC61-70921A	1	421	SUS304 WPB, P0.8, D3.2, L1	X
23	RING-CS	6044-000001	1	1020	ID3, OD3, T0.25, BLACK, SUS304	X
24	SCREW TAPTTTE	6003-000003	2	1009	BH, +, M4, L10, CBLACK, SWRCH 18A	X
25	GEAR P/UP DRIVE	JC66-40219A	1	424	POM(NW-02), WHT, 0.8, Z23	X
26	WASHER PLAIN	6031-000021	5	425		X


6-6-1. Fuser Ass'y

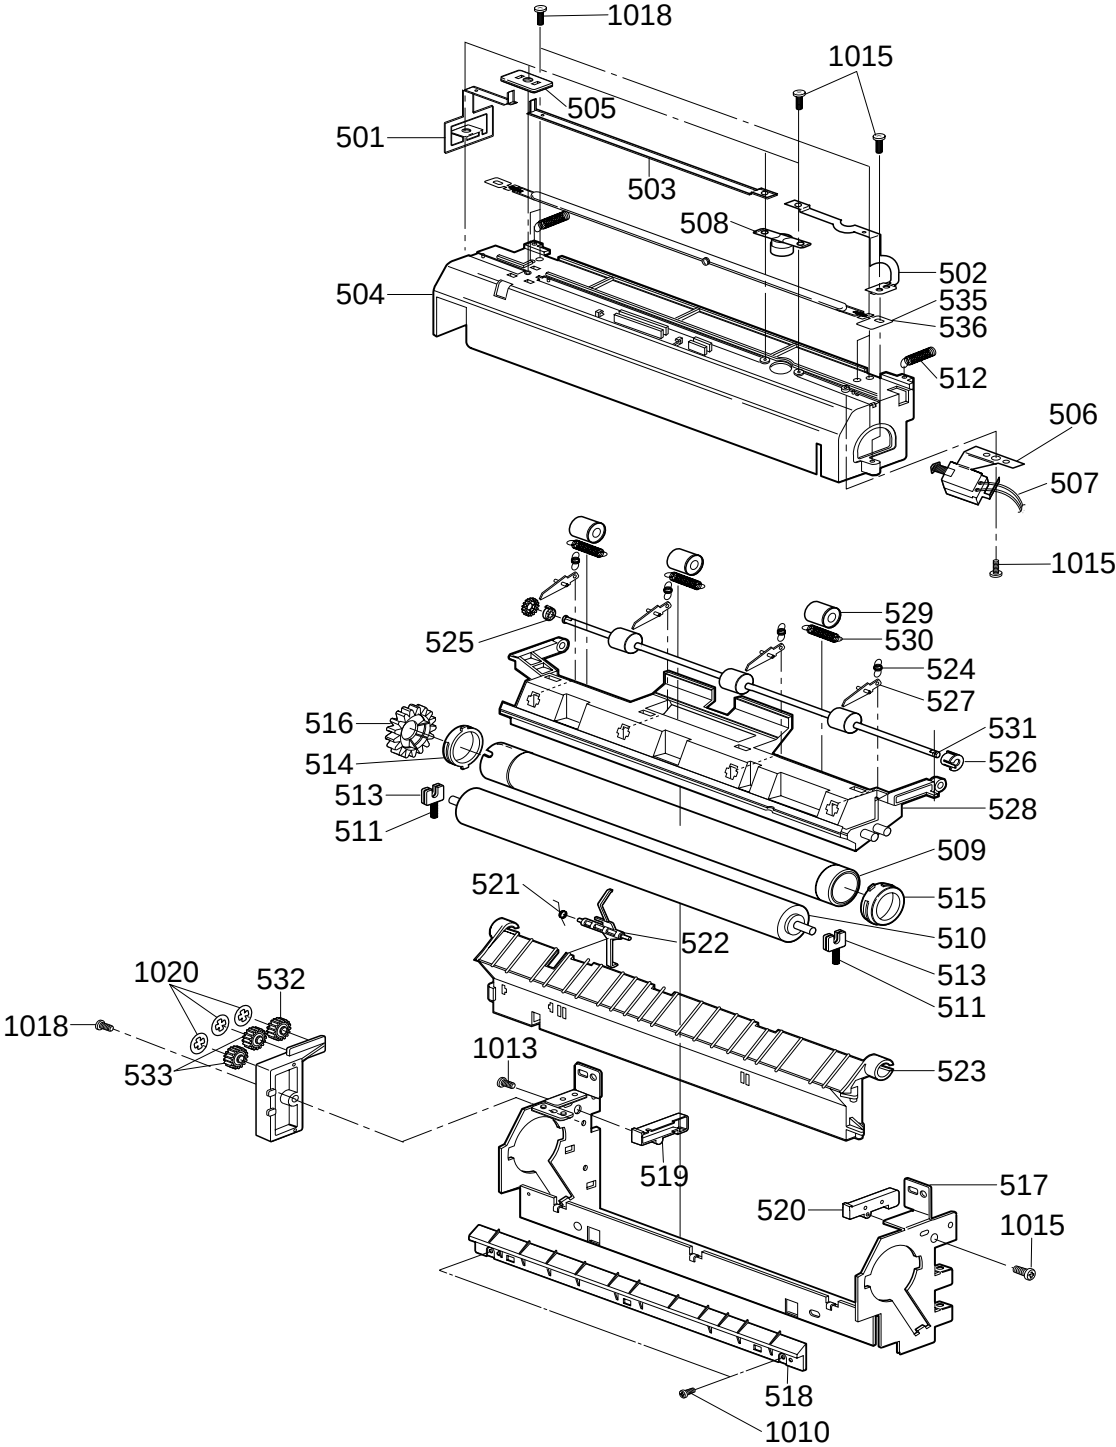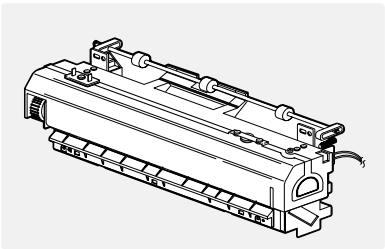

6-6-2. Fuser Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
2	ELA HOU-FUSER 220V	JC96-01062A	1		ASSY	O
3	ELECTRODE FU, L	JC70-10978A	1	501	C5210P T0.6	X
4	ELECTRODE FU, R	JC70-10963A	1	502	C5210P T0.6	X
5	ELECTRODE M	JC70-10979A	1	503	C5210P T0.6	X
6	COVER FUSER UPPER	JC72-41005A	1	504	PBT GF30%	X
7	CAP TERMINAL	JC72-41016A	1	505	PBT GF30%	X
8	SPRING-THERMISTOR	JC70-10997A	1	506	SUS304 CSP 1/2H T0.15	X
9	THERMISTOR	1404-001121	1	507	PT-312	O
10	THERMOSTAT	4712-000001	1	508	150	O
11	ROLLER HEAT	JC73-30904A	1	509	AL+PTFE COATING	O
12	ROLLER PRESSURE	JC73-30903A	1	510	SILICONE+TUBE	O
13	SPRING P/R	JC61-70908A	2	511	SUS304	X
14	SPRING RAIL	JC61-70910A	2	512	SUS304	X
15	BEARING PRESSURE/R	JC66-10901A	2	513	PPS(RBA313N)	X
16	BEARING H/R L	JC66-10902A	1	514	PPS(RBA313N)	X
17	BEARING H/R R	JB66-10903A	1	515	PPS(RBA313N)	X
18	GEAR FUSER	JC66-40913A	1	516	NYLON66 ZYTEL	O
19	FRAME FUSER	JC70-10941A	1	517	SECC T1.2	X
20	GUIDE FRONT	JC72-40998A	1	518	PBT GF30%	X
21	RAIL FUSER L	JC72-40999A	1	519	PBT GF30%	X
22	RAIL FUSER R	JC72-41000A	1	520	PBT GF30%	X
23	SPRING ACTUATOR	JC61-70903A	1	521	SUS304	X
24	ACTUATOR EXIT	JC72-41014A	1	522	PC	X
25	GUIDE REAR	JC72-41015A	1	523	PBT GF30%	X
26	SPRING SAPERATION	JC61-70909A	4	524	SUS304	X
27	BEARING EXIT FU L	JC66-10200A	1	525	POM	X
28	BEARING EXIT FU	JC66-10201A	1	526	POM	X
29	GUIDE CLAW	JC72-41012A	4	527	PEEK	X
30	COVER FUSER LO	JC72-41013A	1	528	PBT GF30%	X
31	ROLLER EXIT	JC72-60059A	3	529	POM	X
32	SPRING FEED ROLL	831 521064BA	3	530	SUS304	X
33	ROLLER EXIT FU	JC73-30905A	1	531	EPDM 60+SUM	X
34	GEAR EXIT L/ID	JC66-40210A	1	532	POM	X
35	GEAR EXIT U/ID	JC66-40211A	2	533	PPS	X
36	BRACKET FUSER GEAR	JC72-40997A	1	534	PBT GF30%	X
38	LAMP-HALOGEN 220V	4713-001072	1	536	220V 600W	O
39	RING-CS	6044-000001	3	1020	ø 3	X
40	SCREW-TAPTITE	6003-000119	8	1013	BH, +, B, M3, L8, CBLACK, SWRCH18A	X
41	SCREW-TAPTITE	6003-000269	4	1016	BH, +, S, M3, L6, ZPC(YEL), SWRCH18A	X
42	SCREW-TAPTITE	6003-000008	2	1010	BH, +, S, M3, L4, ZPC3, SWRCH18A	X


6-7-1. Shield Ass'y

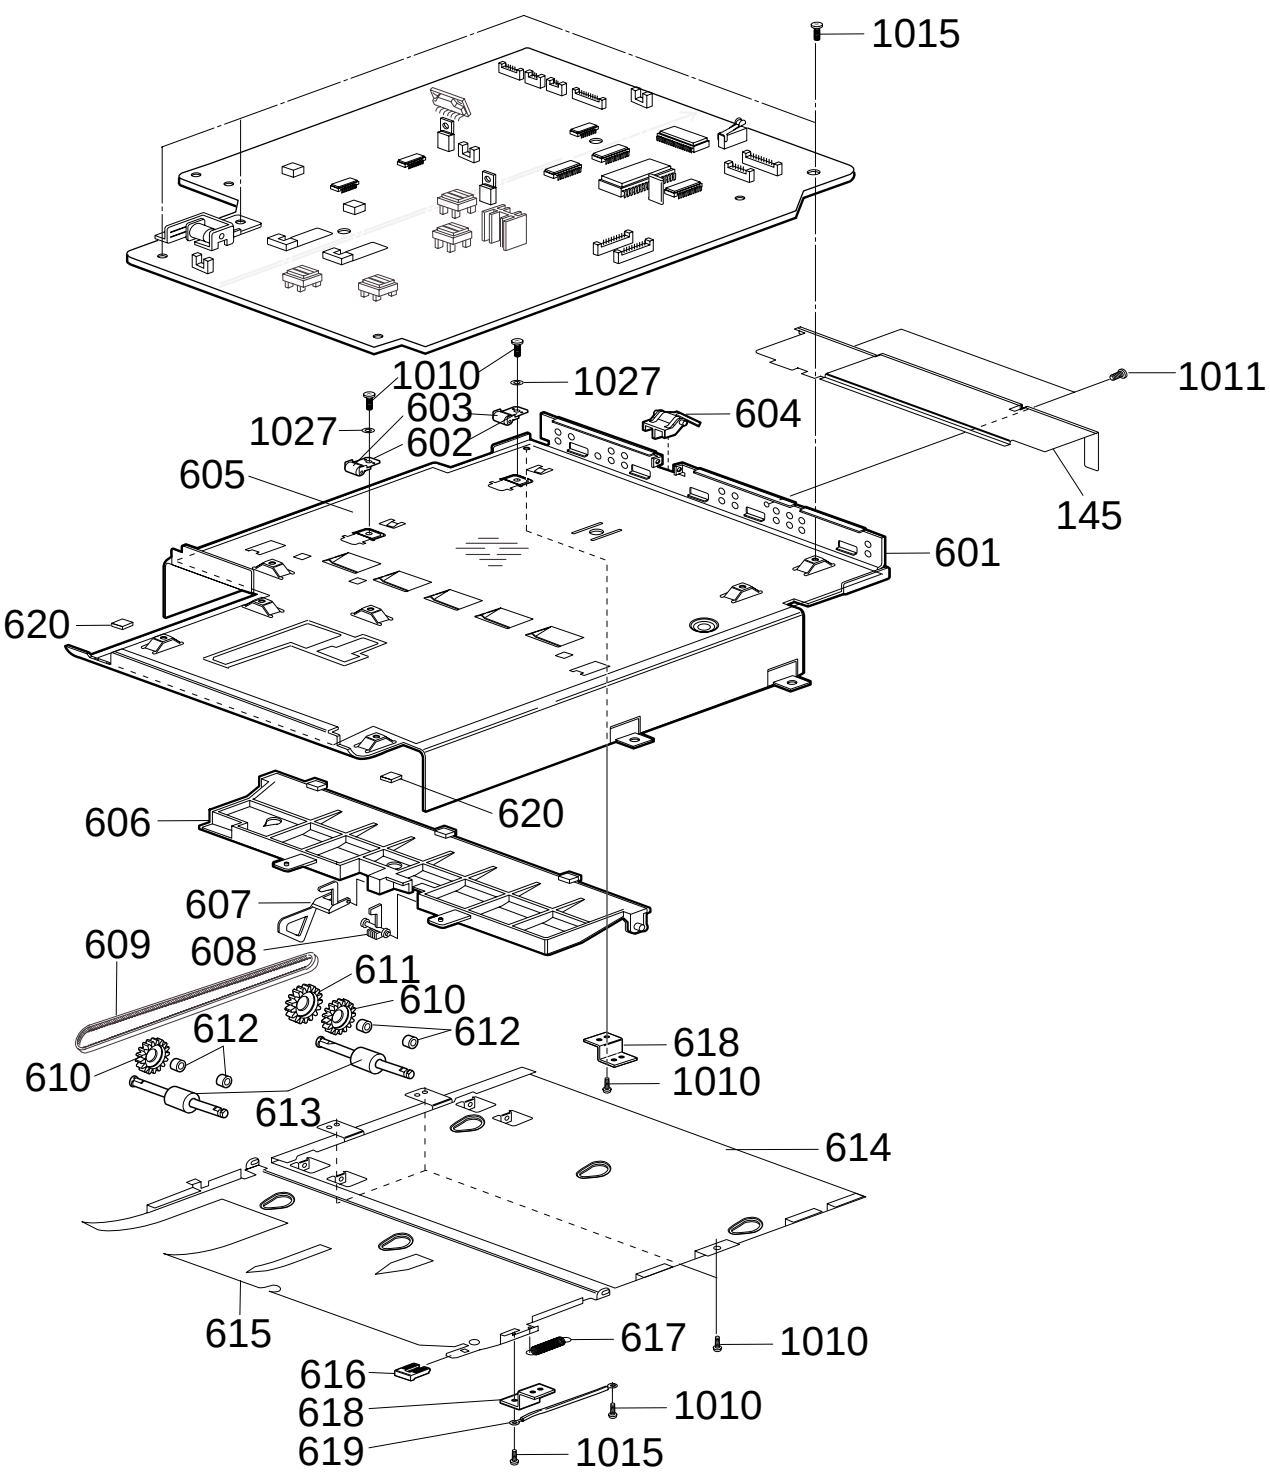

6-7-2 . Shield Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	MEA RACK-SHIELD PCU	JC97-01040A	1		ASSY	O
2	IPR-SHIELD PCB	JC70-10939A	1	601	SECC 0.8t	X
3	IP-SPRING UPPER, DP	JC70-10940A	2	602	SUS304 CSP 0.2t	X
4	PMO-ROLLER UPPER, DP	JC72-40981A	2	603	POM WHT	X
5	PMO-ACRUATOR REAR, DP	JC72-40973A	1	604	ABS VO BLK	X
6	PPR-INSULATOR PCU	JC72-10912A	1	605	PVC T0.4	X
7	PMO-GUIDE UPPER, DP	JC72-40976A	1	606	ABS HB BLK	X
8	PMO-ACTUATOR EMPTY	JC72-40986A	1	607	PC BLK	X
9	PMO-ACTUATOR FRONT, DP	JC72-40973A	1	608	ABS HB BLK	X
10	BELT-TIMMING	JC66-20901A	1	609	B32S2M280	X
11	PMO-PULLEY DUPLEX	JC72-40980A	2	610	POM BLK	X
12	GEAR-DUPLEX	JC66-40912A	1	611	POM WHT	X
13	PMO-BEARING LARGE, DP	JC72-40978A	4	612	POM BLK(CE-20)	X
14	PMO-ROLLER REAR, DP	JC72-41338A	2	613	PPC, NATORAL, NTR	X
15	IPR-GUIDE DUPLEX	JC70-10936A	1	614	SECC 0.8t	X
16	IPR-GUIDE FRONT, DP	JC70-10937A	1	615	SECC 0.8t	X
17	PMO-LEVER OPEN, DP	JC72-40977A	1	616	ABS HB VIOLET	X
18	SPRING-FRONT, DP	JC61-70916A	1	617	SUS ø0.8	X
19	IPR-BRKT SUPPORTER	JC70-10935A	2	618	SECC 1.2t	X
20	CFS HARNESS-DPLX GND	JC39-40537A	1	619	ML-1605	X
21	RPR-CUSHION GUIDE	JC73-10908A	2	620	CORK 1.0t	X
22	SCREW-TAPTITE	6003-000008	7	1010	BH, +, S, M3, L4, ZPC3, SWRCH18A	X
23	SCREW-TAPTITE	6003-000213	5	1015	PWH, +, S, M3, L6, ZPC(YEL), SWRCH18	X
24	WASHER-PLAIN	6031-000006	1	1027	SUS ø7 T1.0	X


6-8-1. Bracket Duplex Ass'y

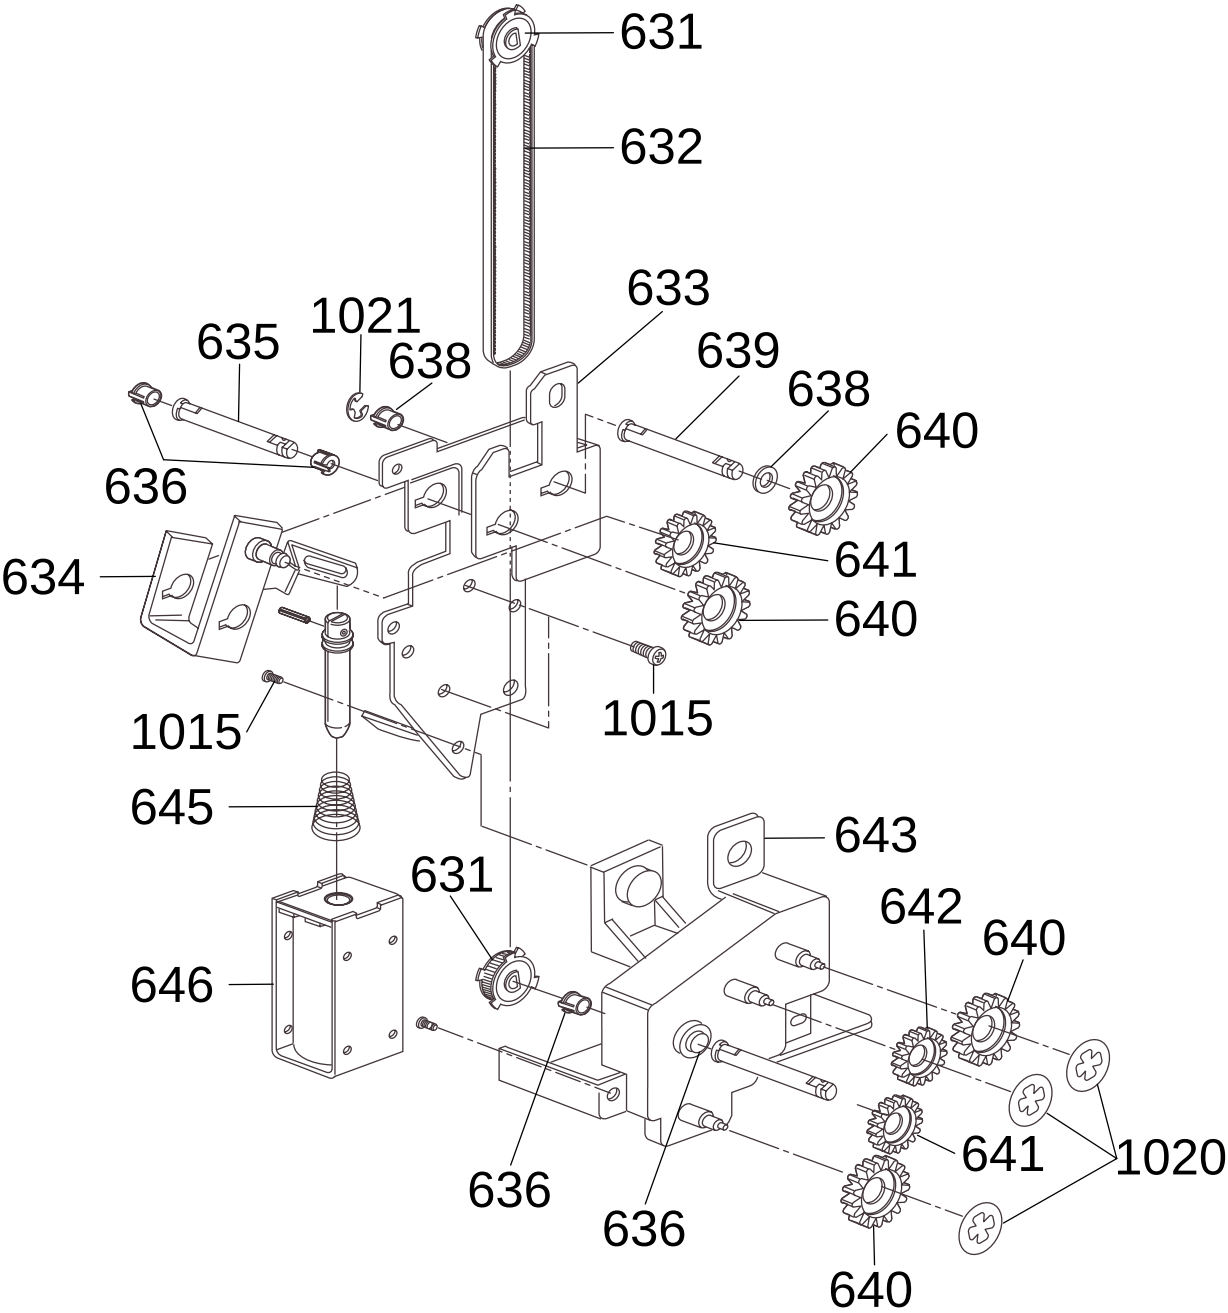

6-8-2. Bracket Duplex Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	ELA-HOU BRKT DUPLEX	JC96-01056A	1		ASSY	O
2	PMO-PULLEY DUPLEX	JC72-40980A	2	631	POM WHT	X
3	BELT-DUPLEX	JC66-20901A	1	632	RUBBER B32S2M280	X
4	IPR-BRKT DUPLEX	JC70-10934A	1	633	SECC 1.2t	X
5	IPR-LINK DUPLEX	JC70-10938A	1	634	SECC 1.2t	X
6	ICT-SHAFT SWING	JC70-40904A	1	635	SUM24L	X
7	PMO-BEARING LARGE DP	JC72-40978A	4	636	POM BLK(CE-20)	X
8	PMO-BEARING SMALL DP	JC72-40979A	2	638	POM BLK(CE-20)	X
9	ICT-SHAFT BELT	JC70-40902A	1	639	SUM24L	X
10	GEAR-DP, IDLE	JC66-40911A	4	640	POM WHT	X
11	GEAR-DUPLEX	JC66-40912A	2	641	POM WHT	X
12	GEAR-EXIT, L/ID	JC66-40210B	1	642	NYLON WHT	X
13	PMO-BRKT GEAR LOWER	JC72-40975A	1	643	ABS GF20% BLK	X
14	ICT-SHAFT BELT2	JC70-40903A	1	644	SUM24L	X
15	SPRING-SOLENOID	JC61-70917A	1	645	SUS ø0.8	X
16	SOLENOID-DUPLEX	JC33-10003A	1	646	24V 15W	X
17	SCREW-TAPTITE	6003-000213	3	1015	PWH, +, S, M3, L6, ZPC(YEL), SWRCH18	X
18	RING-CS	6044-000001	3	1020	ID3, OD7, T0.25, BLK, SUS304	X
19	RING-E	6044-000124	1	1021	ID3, OD7, T0.6, ZP(BLK), STSC	X

6-9-1. Bracket Motor Ass'y

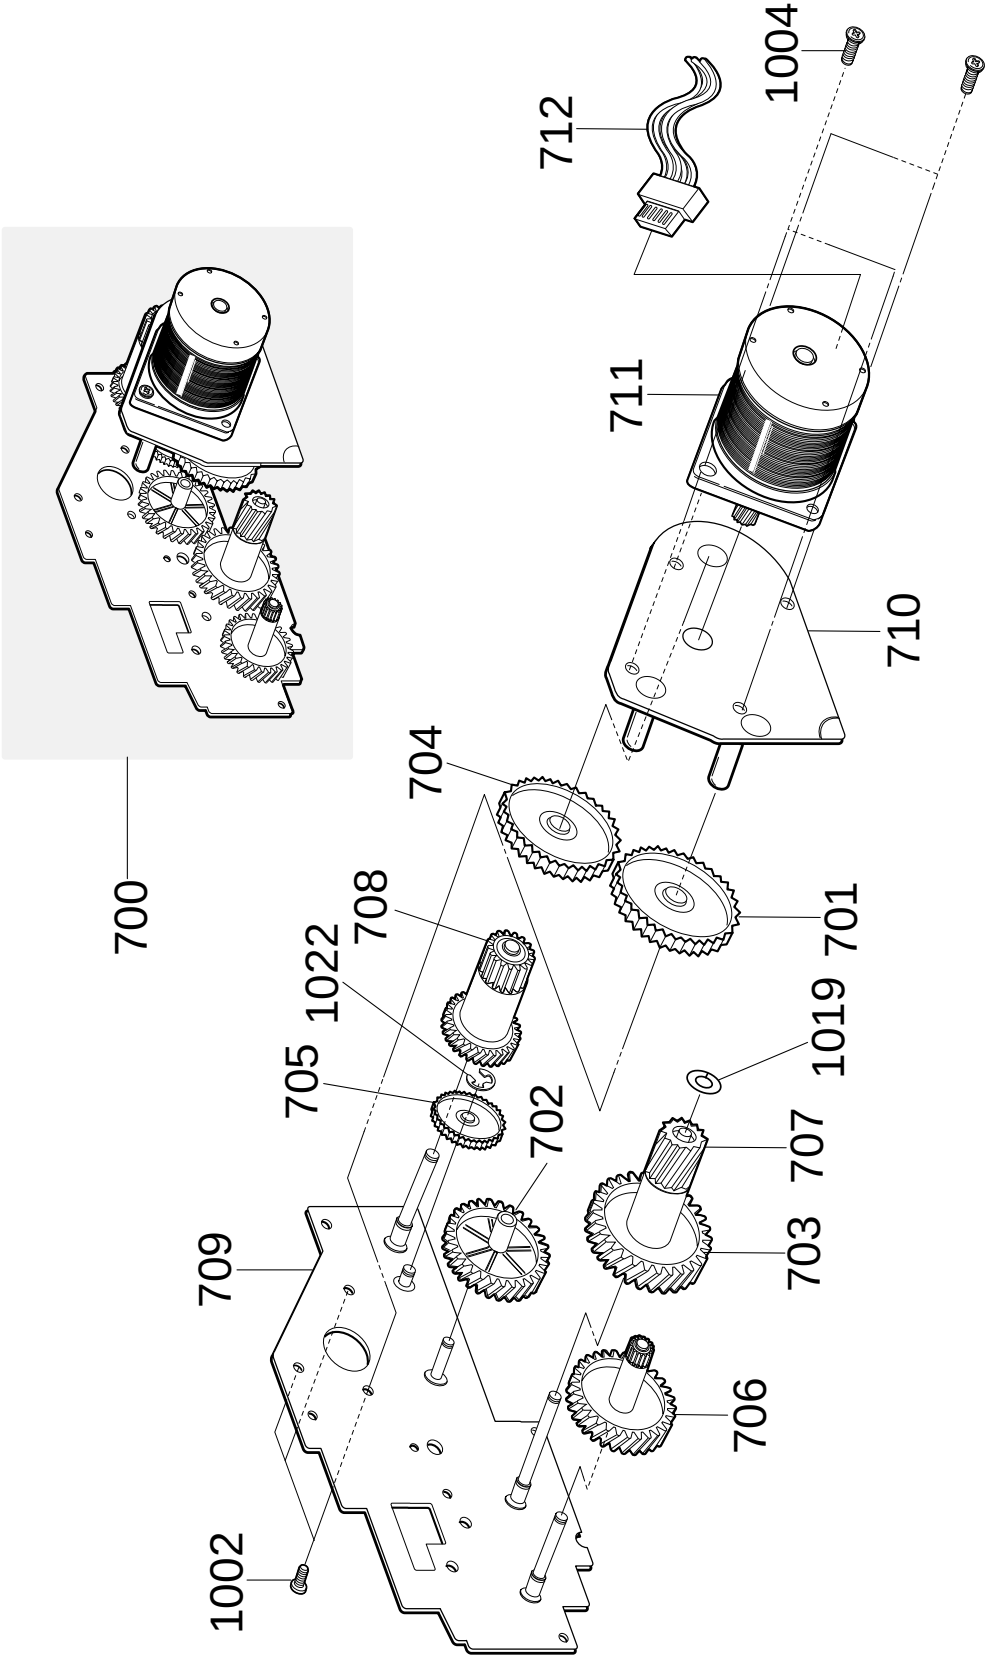


6-9-2. Bracket Motor Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	ELA HOU-BRKT MOTOR	JC96-01058B		700	ASSY	O
2	GEAR-132/50(12)	JC66-40959A	1	701	POM	X
3	GEAR-IDLE, POC(12)	JC66-40960A	1	702	POM	X
4	GEAR-OPC DRV(12)	JC66-40961A	1	703	POM	X
5	PLT, GEAR-125/18	JC66-40376B	1	704	POM	X
6	PLT, GEAR-IDLE, FU	JC66-40377V	1	705	POM	X
7	GEAR-FEED DRIVE(16)	JC66-40963A	1	706	POM	X
8	GEAR-OPC DRV2	JC66-40910A	1	707	POM	X
9	GEAR-FUSER DRIVE	JC66-40915A	1	708	POM	X
10	IPR-BRKT GEAR	JC70-10942A	1	709	SECC 1,2T	X
11	IPR-BRKT MOTOR	JC70-10943A	1	710	SECC 1,2T	X
12	MOTOR-STEP	3101-001152	1	711	5deg, 3V, 1700g, HB	X
13	WASHER-PLAIN	6031-000023	1	1019	ID5.9, OD10, T0.5, BLK, POLY	X
14	E-RING	6044-000124	1	1022	ID5.0, OD11.0, T0.6, STS304	X
15	SCREW-MACHINE	6001-000131	3	1002	BH, +, M3, L6, ZPC(YEL), SM20C	X
16	SCREW-MACHINE	6001-000157	2	1004	BH, +, M4, L8, ZPC(YEL), SM20C	X
17	CBF HARNESS MOTOR	JC39-40535	1	712	UL 1061, 200	X

6-10-2. Frame SCF Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	MEA RACK FRAME SCF	JC97-01180A			ASSY	O
2	PMO FRAME TOP	JC72-41197A	1	901	ABS VH0800D C7425	X
3	PMO SENSOR LEVER	JC72-41280A	1	902	POM (BLK)	X
4	PMO SENSOR FRAME	JC72-41212A	1	903	POM (WHT)	X
5	PMO ARM ENV	JC72-41190A	1	904	POM (BLK)	X
6	IPR CASE TOP	JC70-11025A	1	905	SECC1.2T	X
7	PMO GUIDE ENV	JC72-41199A	1	906	HIPS C7425	X
8	IPR GROUND TOP	JC70-11028A	1	907	SUS304CSP3/4H0.2T	X
9	PMO HUB CLUTCH	JC72-40587A	1	908	POM (BLK)	X
10	PMO COLLAR CLUTCH PI	JC72-40569A	1	909	POM (BLK)	X
11	SPTING-TS, CLUTCH	JC61-70331A	1	910	SWPA	X
12	GEAR P/UP OPTION	JC66-40364A	1	911	POM (BLK)	X
13	PMO BEARING SHAFT	JC72-41191A	4	912	POM M90-44 (WHT)	X
14	PMO IDLE PICK UP	JC72-40869A	2	913	POM	X
15	ICT PIN-PARELLED,P/U	JG70-40360A	1	914	SUM24L NI	X
16	ICT SHAFT PICK UP	JC70-40916A	1	915	SUM24L NI	X
17	PMO P/UP HOUSING	JC72-41211A	1	916	ABS HF-380 ㄱ (BLK)	X
18	RPR PICK UP ROLL	JC73-10944A	1	917	EPDM	X
19	GEAR FEED SCF	JC66-40955A	1	918	POM (WHT)	X
20	RPR FEED ROLLER	JC73-10945A	1	919	SUM24L+EPDM	X
21	PMO IDLE FEED	JC72-41206A	2	920	POM (WHT)	X
22	PMO IDLE FRAME	JC72-41207A	1	921	ABS GF20% (BLK)	X
23	PMO IDLE FRAME 1	JC72-41281A	1	922	ABS GF20% (BLK)	X
24	SPRING IDLE 1	JC61-70955A	1	923	SUS304-WPB	X
25	SPRING IDLE 2	JC61-70954A	1	924	SUS304-WPB	X
26	PMO GUIDE PAPER 2	JC72-41198A	1	925	ABS VH0800D C7425	X
27	IPR SCF SOLENOID	JC70-11033A	1	926	SECC1.2T	X
28	GEAR IDLE SCF	JC66-40954A	1	927	POM (WHT)	X
29	GEAR IDLE (Z=30)	JC66-40950A	2	928	POM (WHT)	X
30	GEAR IDLE 19	JC66-40012A	1	929	POM (BLK)	X
31	IPR SCF MOTOR	JC70-11031A	1	930	SECC1.2T	X
32	PMO FRAME LEFT	JC72-41194A	1	931	ABS VH0800D C7425	X
33	PMO FRAME RIGHT	JC72-41196A	1	932	ABS VH0800D C7425	X
34	IPR GROUND FEED	JC70-11027A	1	933	SUS304CSP3/4H0.2T	X
35	IPR PUSH PLT SPRING	JC70-10928A	1	934	SUS304-CSP0.3T	X
36	IPR BRKT PAPER SIZE	JC70-10921A	1	935	SECC1.6T	X
37	IPR GROUND BOTTOM	JC70-11026A	1	936	SUS304CSP3/4H0.2T	X
38	IPR CASE BOTTOM	JC70-11024A	1	937	SECC1.2T	X
39	MOTOR	JC31-10501A	1	938		X
40	SOLENOID MAGNET	JC33-10501A	1	939		X
41	CBF HARNESS SCF MOT	JC39-40571A	1	940	UL1007 AWG#18, 200mm	X
42	CBF HARNESS SCF CST	JC39-40582A	1	941	UL1061 AWG#26, 180mm	X
43	CBF HARNESS SCF OPT	JC39-40539A	1	942	YK1061 AWG#24, 600mm	X
44	CBF HARNESS SCF FEED	JC39-40570A	1	943	UL1007 AWG#18, 135mm	X
45	PBA SUB SCF	JC92-01062A	1	944		X
46	PBA SUB CASSETE	JC92-00981A	1	945		X
47	FOOT RUBBER	JC61-40309A	4	946	CR	X
48	SPRING IDLE, SCF	JG61-70544A	1	947	SUS304-WPB	X
49	IPR SCF MOTOR1	JC70-11032A	1	948	SECC 1.0t	X
50	INSULATOR SCF	JC70-11073A	1	949	PVC 0.2t	X
51	CBF HARNESS SCF GND	JC39-40608A	1	950	UL1007	X
52	SCREW MACHINE	6001-000125	2	1001	BH, +, M3*4, ZPC	X
53	SCREW MACHINE	6001-000131	2	1002	BH, +, M3*6, ZPC	X
54	SCREW TAPTITE	6003-000001	25	1007	PWH, +, B, M3*10, N	X
55	SCREW TAPTITE	6003-000213	12	1015	PWH, +, S, M3*6, ZP	X
56	RING E	6044-000231	8	1022	ID5, OD11	X
57	RING E	6044-000129	3	1023	ID6, OD12	X
58	SCF RGND	JC39-40614A	1	1024		X

6-11-1. Cassette SCF Ass'y

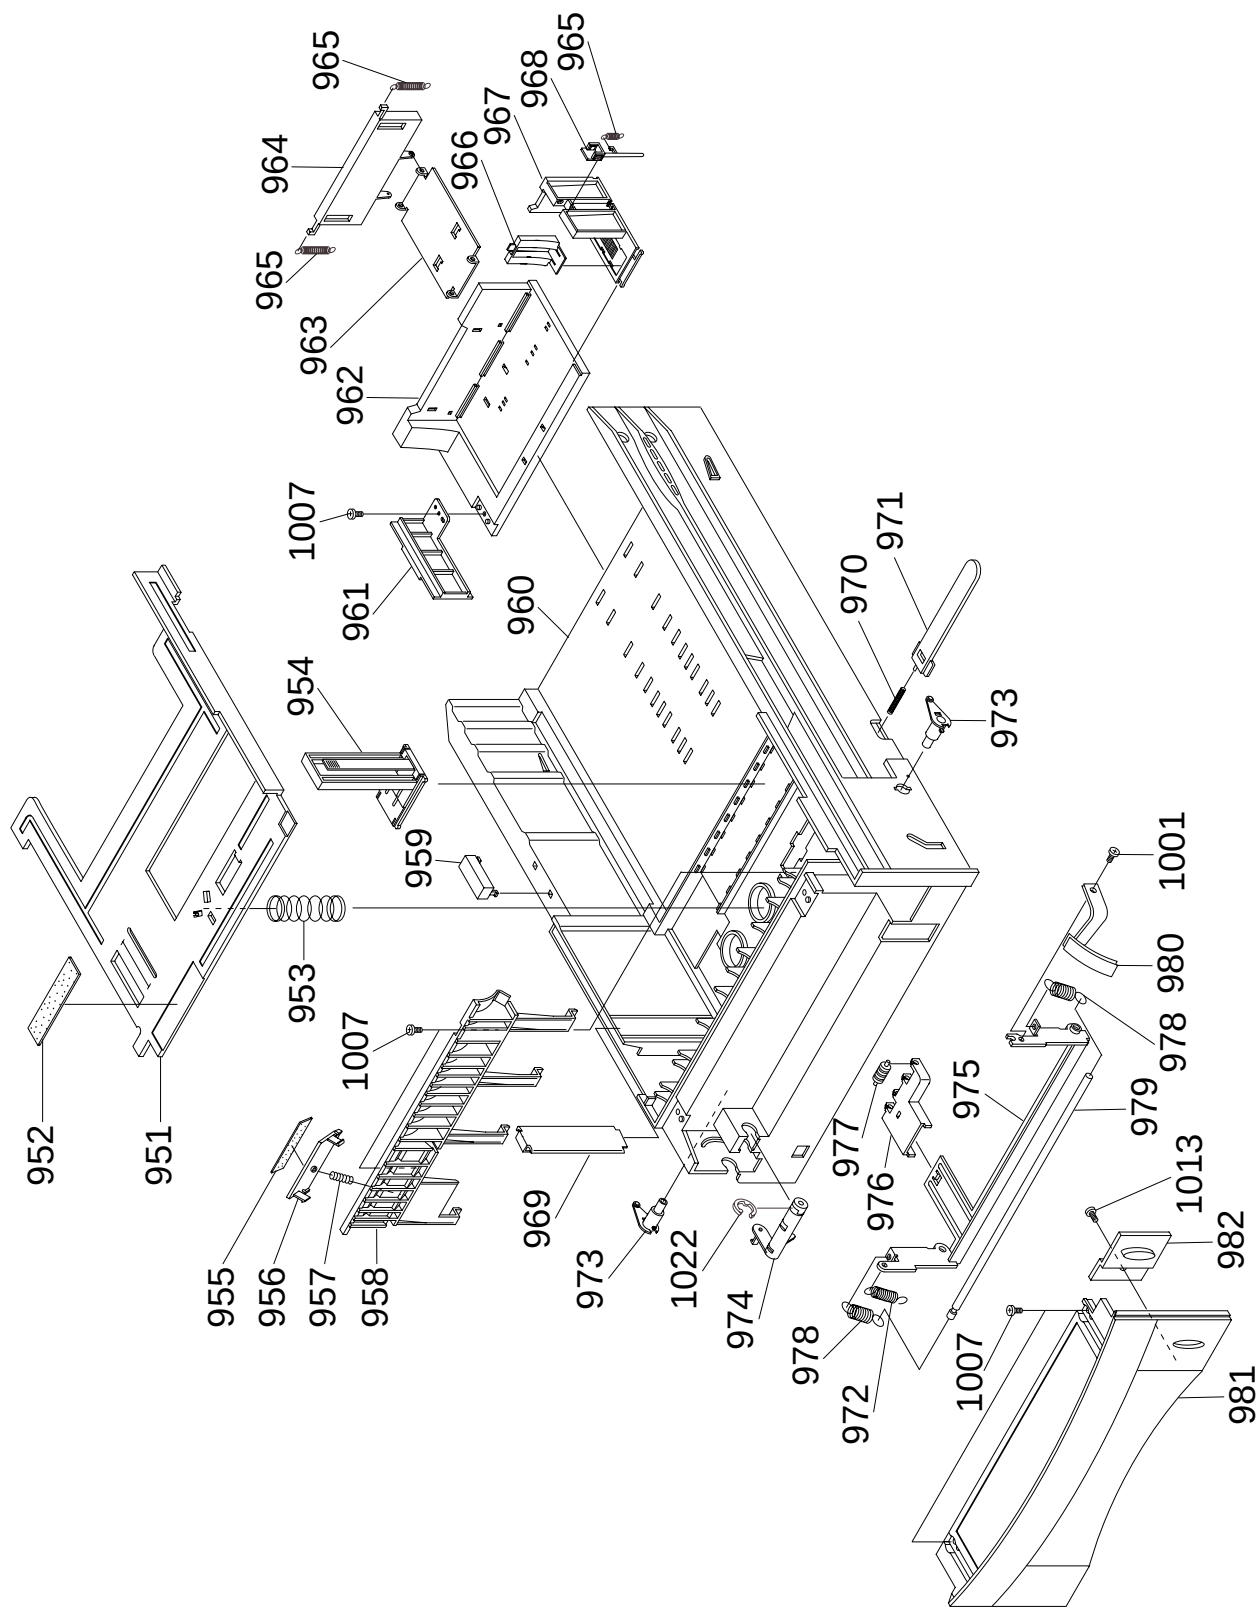

6-11-2. Cassette SCF Ass'y Parts List

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	MEA RACK CAST SCF	JC97-01179A	1	951	ASSY	O
2	IPR KNOCK UP(SCF)	JC70-11029A	1	951	SECC1.0T	X
3	RPR CORK KNOCKUP	JC73-10947A	1	952	CORK+CR RUBBER	X
4	SPRING SCF K/U	JC61-70957A	1	953	SUS304-WPB	X
5	PMO GUIDE SIDE	JC72-41205A	1	954	HIPS PANTONE 2715C	X
6	RPR CORK PAD	JC73-10946A	1	955	SILICON RUBBER	X
7	PMO FRAME PAD	JC72-41195A	1	956	ABS+PC 7262C	X
8	SPRING PAD	JC61-70953A	1	957	SUS304-WPB	X
9	PMO GUIDE PAPER1	JC72-41201A	1	958	HIPS C7425	X
10	PMO DUMMY ENV	JC72-41282A	1	959	HIPS C7425	X
11	PMO CASSETTE SCF	JC72-41192A	1	960	HIPS C7425	X
12	PMO DETECT PANNEL	JC72-41193A	1	961	HIPS C7425	X
13	PMO GUIDE REAR 1	JC72-41202A	1	962	HIPS C7425	X
14	IPR PLATE LEVER	JC70-11030A	1	963	SECC1.0T	X
15	PMO LEVER REAR	JC72-41209A	1	964	HIPS PANTONE 2715C	X
16	SPRING IDLE, SCF	JG61-70544A	3	965	SUS304-WPB	X
17	PMO GUIDE REAR 3	JC72-41204A	1	966	HIPS PANTONE 2715C	X
18	PMO GUIDE REAR 2	JC72-41203A	1	967	HIPS C7425	X
19	PMO GUIDE LOCK	JC72-41200A	1	968	POM PANTONE 2715C	X
20	IPR PLATE PAPER	JC70-11047A	1	969	SUS304	X
21	SPRING LOCKER, PLATE	JG61-70531A	1	970	SUS304-WPB	X
22	PMO LOCKER PLATE	JC72-41210A	1	971	POM (WHT)	X
23	SPRING SCF LEVER	JC61-70956A	1	972	SUS304-WPB	X
24	PMO BUSH K/UP	JC72-40961A	2	973	POM (WHT)	X
25	PMO LEVER LINK	JC72-40968A	1	974	POM PANTONE 2715C	X
26	IPR PLATE SUB K/UP	JC70-10927A	1	975	SECC1.6T	X
27	PMO CAP PLATE K/UP	JC72-40962A	1	976	POM (WHT)	X
28	PMO ROLLER FD R	JC72-41008A	1	977	POM(BLK)	X
29	SPRING SUB PLATE	JC61-70919A	2	978	SUS304-WPB	X
30	ICT SHAFT SPRING K/UP	JC70-40907A	1	979	SUM24L NI	X
31	PMO LEVER PAPERS	JC72-41341A	1	980	ABS	X
32	PMO SUB GUIDE CAST	JC72-40971A	1	981	ABS	X
33	PMO WINDOW PAPER	JC72-41039A	1	982	ACRYL	X
34	SCREW MACHINE	6001-000125	1	1001	BH, +, M3*4, ZPC	X
35	SCREW TAPTITE	6003-000001	5	1007	PWH, +, B,M3*10, N	X
36	SCREW TAPTITE	6003-000119	1	1013	BH, +, B,M3*8, CBL	X
37	RING E	6044-000231	1	1022	ID6, OD12	X

6-12. Miscellaneous items

No.	Parts Name	Code No.	Q'ty	Drw No.	Specifications	A/S
1	SCREW-MACHINE	6001-000125	1	1001	BH, +, M3, L4, ZPC(YEL), SM20C	O
2	SCREW-MACHINE	6001-000131	1	1002	BH, +, M3, L6, ZPC(YEL), SM20C	O
3	SCREW-MACHINE	6001-000144	1	1003	BH, +, L16, NI PLT, SM20C	O
4	SCREW-MACHINE	6001-000157	1	1004	BH, +, M4, L8, ZPC(YEL), SM20C	O
5	SCREW-MACHINE	6001-000557	1	1005	PH, +, M3, L6, NI PLT, SM10C	O
6	SCREW-MACHINE	6001-001144	1	1006	BH, +, M2, L15, ZPC(YEL), SWRCH18A	O
7	SCREW-TAPTITE	6003-000001	1	1007	PWH, +, M3, L10, NI PLT, SWRCH18A	O
8	SCREW-TAPTITE	6003-000002	1	1008	PWH, +, B, M3, L10, CBLACK, SWRCH18A	O
9	SCREW-TAPTITE	6003-000003	1	1009	BH, +, B, M4, L10, CBLACK, SWRCH18A	O
10	SCREW-TAPTITE	6003-000008	1	1010	BH, +, S, M3, L4, ZPC3, SWRCH18A	O
11	SCREW-TAPTITE	6003-000116	1	1011	BH, +, B, M3, L6, NI PLT, SWRCH18A	O
12	SCREW-TAPTITE	6003-000117	1	1012	BH, +, B, M3, L6, ZPC(YEL), SWRCH18A	O
13	SCREW-TAPTITE	6003-000119	1	1013	BH, +, B, M3, L8, CBLACK, SWRCH18A	O
14	SCREW-TAPTITE	6003-000191	1	1014	PWH, +, S, M3, L8, ZPC(YEL), SWRCH18	O
15	SCREW-TAPTITE	6003-000266	1	1015	PWH, +, S, M3, L6, ZPC(YEL), SWRCH18	O
16	SCREW-TAPTITE	6003-000269	1	1016	BH, +, S, M3, L6, ZPC(YEL), SWRCH18A	O
17	SCREW-TAPTITE	6003-001065	1	1017	PWH, +, M3, L12, NI, SWRCH18A	O
18	SCREW-TAPTITE	6003-001066	1	1018	PH, +, B, M3, L33, CBLACK, SWRCH18A	O
19	WASHER-PLAIN	6031-000023	1	1019	ID5.9, OD10.0, T0.5, BLK, POLY	O
20	RING-CS	6044-000001	1	1020	ID3, OD3, T0.25, BLK, SUS304	O
21	RING-E	6044-000124	1	1021	ID3, OD7, T0.6, ZPC(BLK), STSC	O
22	RING-E	6044-000127	1	1022	ID5.0, OD11.0, T0.6, -, STS304	O
23	RING-E	6044-000129	1	1023	ID6, OD12, T0.8, ZPC(BLK), STSC	O
24	RING-E	6044-000149	1	1024	ID4, OD9, I0.6, CBLACK, STSC304	O
25	CABLE TIE	6501-000004	1	1025	DA-80, T1, W2.5, L80, NTR, NYLON66	O
26	CABLE CLAMP	6502-000130	1	1026	DAWS-1NA, NTR	O
27	WASHER - PLAIN	6031-000006	1	1027	M3, ID3.2, OD5.0, T0.5, WHT, PC	O
28	SCREW-MACHINE	6001-001172	1	1028	PWH, M3, L8	O